

PRODUCT CATALOG

Lighting

Ceiling Fans and Light Kits

LED Disk Lights

LED Outdoor

LED Utility

Area, Flood and Canopy Lights

Garden Bollards

Post Tops and Poles

String Lights

LED Track Lights

LED Exit and Emergency

LED Lamps


Sourced. Stocked. Delivered.



Contents

Reference Information	3
Fans and Fan Light Kits	5
Ceiling Fans	6
Outdoor Fans	24
Bad Ass Fans	26
Fan Light Kits	28
Outdoor Fan Light Kits	32
Wall Controls and Fan Blades	33
Downrods	34
LED Lighting	35
LED Disk Lights	36
Ultra-Thin Round Disk Lights	43
Low Profile Round Disk Lights	47
Ultra-Thin Square Disk Lights	52
Temporary Jobsite Disk Lights	57
LED Outdoor	58
LED Utility	87
LED Area Lights	104
Flood Lights	107
Canopy Lights	110
Garden Bollards	111
Pole Wind Ratings and Light Distribution Patterns	115
Shoebox Area Lights	118
Designer Post Tops	120
Poles	132
String Lights	134
LED Track Lights	136
LED Exit and Emergency	142
LED Lamps	148

Reference Information

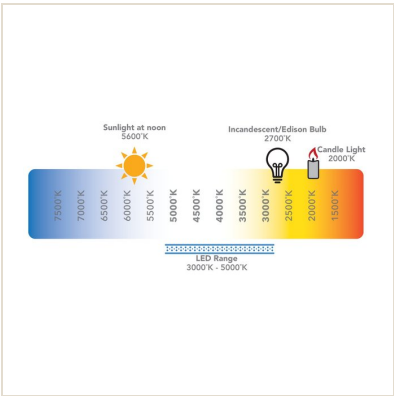


Color Temperature Chart

- Sunlight at noon 5600°K
- Incandescent/Edison Bulb 2700°K
- Candle Light 2000°K
- LED Range 3000°K - 5000°K

Sunlight at noon	5600°K
Incandescent/Edison Bulb	2700°K
Candle Light	2000°K
LED Range	3000°K - 5000°K
Scale	7500°K, 7000°K, 6500°K, 6000°K, 5500°K, 5000°K, 4500°K, 4000°K, 3500°K, 3000°K, 2500°K, 2000°K, 1500°K



CCT
Color changing fixtures allow you to change the light color (30K, 40K, or 50K) using a switch.



MV
Multi-volt fixtures will work with 120v or 277v power output.



CFM
Cubic feet per minute of air movement by a fan.



ADA Compliant
Wall hung fixtures extend from the wall less than or equal than 4 inches.



Bug Resistant
Fixtures are sealed and/or gasketed in such a way that prevents bugs from entering.



Coastal
Fixtures are made from materials that tend to resist corrosion in coastal environments.



Corrosion Resistant
Fixtures are made from materials that tend to resist corrosion in general applications.



Wet Location
Fixtures are approved for use outdoors in areas that may be exposed to rain.



Dark Sky Approved

Fixtures are designed in such a way that minimizes light output up vertically as to avoid contributing to light pollution.

LIGHTING

Fans and Fan Light Kits

Ceiling Fans

Outdoor Fans


Bad Ass Fans

Fan Light Kits


Outdoor Fan Light Kits

Wall Controls and Fan Blades

Downrods

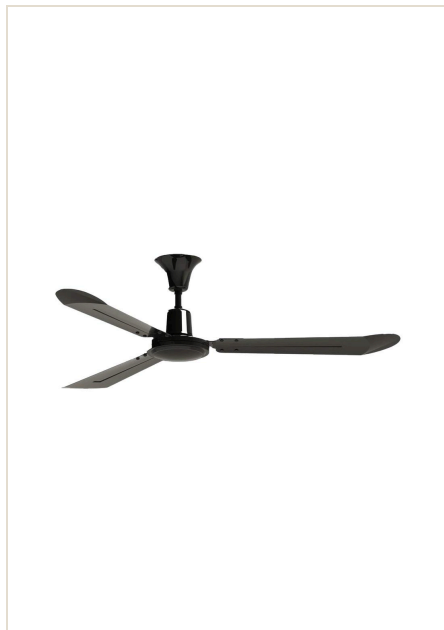

Ceiling Fans



52" 3-Blade Fan

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF9830	Standard Blade Package Brushed Nickel w/ Walnut Blades
AXCF9830	Standard Blade Package Brushed Nickel w/ BN Blades
AXCF9830	Standard Blade Package White w/ White Blades

ETL	Indoor Applications
Blade Sweep	52"
Blades	3 - Non Reversible - ABS
Lead Wire	76"
Motor Type	AC - 172 × 20mm motor
Voltage	120v
Blade Pitch	14°
Downrod Length	6"
Light Kit	Integrated light kit with 15w LED and frosted opal glass diffuser
Control	Wall Control
Performance - High	CFM 5,982; Watts 71.57; CFM/Watt 85
Performance - Medium	CFM 3,889; Watts 31.59; CFM/Watt 123
Performance - Low	CFM 2,264; Watts 13.37; CFM/Watt 169

Light Kit	Wattage 15w; Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; WH = White
Blades	WAL = Walnut; BN = Brushed Nickel; WH = White
Light Kit	15W = 15W Integrated LED
Kelvin/CCT	30K = 3000°Kelvin
Options	SWC = Standard Wall Control; DWC = Dimmable Wall Control
Wall Controls	DWC = Fan and Light Wall Control (AXWS-200): 4 Speed Control; Dual Slide; White finish; Dimmer; H - 4.625" W - 2.75"; 120V/60Hz; SWC = Fan and Light Wall Control (AXWS-202): 3 Speed Control; On/Off Light Control; White finish
Ordering example	AXCF9830-BN-WAL-17W-30K-SWC

ETL



52" 3 and 4-Blade Fans

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF822	4 Blade Fan Standard Blade Package All Blade Finishes Pull Chain Control
AXCF9822	4 Blade Fan Standard Blade Package All Blade Finishes Wall Control
AXCF821	3 Blade Fan Standard Blade Package All Blade Finishes Pull Chain Control
AXCF9821	3 Blade Fan Standard Blade Package All Blade Finishes Wall Control

ETL	Indoor Applications
Blade Sweep	52"
Blades	3/4 - Reversible - ABS
Lead Wire	54"
Motor Type	AC - 153 × 18mm motor
Voltage	120v
Blade Pitch	14°
Downrod Length	6"
Speeds	3 - Reversible Motor
Light Kit	None
Control	Pull Chain / Wall Control
Performance - High	CFM 4,850; Watts 55.2; CFM/Watt 88
Performance - Medium	CFM 3,280; Watts 29.1; CFM/Watt 113
Performance - Low	CFM 1,865; Watts 13.3; CFM/Watt 140

Finish	BN = Brushed Nickel; CH = Chrome; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Blades	BN = Brushed Nickel; WAL = Walnut; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Light Kit	Blank = No Light Kit; 20W = 2× 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	SWC = Standard Wall Control; DWC = Dimmable Wall Control
Wall Controls	DWC = Fan and Light Wall Control (AXWS-200): 4 Speed Control; Dual Slide; White finish; Dimmer; H - 4.625" W - 2.75"; 120V/60Hz; SWC = Fan and Light Wall Control (AXWS-202): 3 Speed Control; On/Off Light Control; White finish
Ordering example	AXCF9822-BN-WAL-SWC

ETL



3-Blade Fans

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF9856	54" Standard Blade Package All Brushed Nickel Blades
AXCF9860	52" Standard Blade Package All Brushed Nickel Blades 20W Light Kit
AXCF9864	52" Standard Blade Package All Brushed Nickel Blades

ETL	Indoor Applications
Blade Sweep	98556 - 54", 9860/9864 - 52"
Blades	3 - Non Reversible - Plywood
Lead Wire	54"
Motor Type	9856 - AC - 153 x 18mm motor 9860/9864 - AC - 188 x 20mm motor
Voltage	120v
Blade Pitch	14°
Downrod Length	6"
Light Kit	AXCF9860 - Satin White Glass Diffuser AXCF9864 - No Light Kit
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Wall Control
Performance (9856) - High	CFM 4,850; Watts 55.2; CFM/Watt 88
Performance (9856) - Medium	CFM 3,280; Watts 29.1; CFM/Watt 113

ETL

Performance (9856) - Low	CFM 1,865; Watts 13.3; CFM/Watt 140
Performance (9860/9864) - High	CFM 5,156; Watts 60.3; CFM/Watt 85.5
Performance (9860/9864) - Medium	CFM 3,561; Watts 38.3; CFM/Watt 92.9
Performance (9860/9864) - Low	CFM 2,771; Watts 19.7; CFM/Watt 140
Light Kit	Wattage 20w; Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel
Blades	BN = Brushed Nickel
Light Kit	Blank = No Light Kit; 20W = 2x 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	SWC = Standard Wall Control; DWC = Dimmable Wall Control
Ordering example	AXCF9860-BN-BN-20W-30K-SWC



50" 3-Curved Blade Fan

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF9800-BN-BN	Standard Blade Package All Brushed Nickel Blades
AXCF9800-BN-WAL	Standard Blade Package All Walnut Blades
AXCF9800-ORB-ORB	Standard Blade Package All Oil Rubbed Bronze Blades
AXCF9800-BK-BK	Standard Blade Package All Black Blades
AXCF9800-WH-WH	Standard Blade Package All White Blades
AXCF9800	50" 3-Curved Blade Fan

ETL	Indoor Applications
Blade Sweep	50"
Blades	3 - Non Reversible - Plywood
Lead Wire	54"
Motor Type	AC - 153 x 15mm motor
Voltage	120v
Blade Pitch	12°
Downrod Length	6"
Speeds	3 - Reversible Motor
Light Kit	Satin White Glass Diffuser
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Wall Control
Performance - High	CFM 5,313; Watts 54.6; CFM/Watt 97
Performance - Medium	CFM 3,363; Watts 25; CFM/Watt 134
Performance - Low	CFM 2,060; Watts 9.3; CFM/Watt 221

Light Kit	Wattage 20w (2x 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Blades	BN = Brushed Nickel; WAL = Walnut; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Light Kit	20W = 2x 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	SWC = Standard Wall Control; DWC = Dimmable Wall Control
Wall Controls	DWC = Fan and Light Wall Control (AXWS-200): 4 Speed Control; Dual Slide; White finish; Dimmer; H - 4.625" W - 2.75"; 120V/60Hz; SWC = Fan and Light Wall Control (AXWS-202): 3 Speed Control; On/Off Light Control; White finish
Ordering example	AXCF9800-BN-BN-20W-30K-SWC AXCF9800-BK-BK-20W-30K-SWC

ETL



50" 3-Blade Fan

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF9870-BN-BN	Standard Blade Package All Brushed Nickel Blades
AXCF9870-BN-WAL	Standard Blade Package All Walnut Blades
AXCF9870-ORB-ORB	Standard Blade Package All Oil Rubbed Bronze Blades
AXCF9870-BK-BK	Standard Blade Package All Black Blades
AXCF9870-WH-WH	Standard Blade Package All White Blades
AXCF9870	50" 3-Blade Fan

ETL	Indoor Applications
Blade Sweep	50"
Blades	3 - Reversible - Plywood
Lead Wire	54"
Motor Type	AC - 153 x 15mm motor
Voltage	120v
Blade Pitch	12°
Downrod Length	6"
Speeds	3 - Reversible Motor
Light Kit	Satin White Glass Diffuser
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Wall Control
Performance - High	CFM 5,420; Watts 65; CFM/Watt 83
Performance - Medium	CFM 3,450; Watts 33; CFM/Watt 105
Performance - Low	CFM 2,300; Watts 13; CFM/Watt 177

Light Kit	Wattage 20w (2x 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Blades	BN = Brushed Nickel; WAL = Walnut; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Light Kit	20W = 2x 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	SWC = Standard Wall Control; DWC = Dimmable Wall Control
Wall Controls	DWC = Fan and Light Wall Control (AXWS-200): 4 Speed Control; Dual Slide; White finish; Dimmer; H - 4.625" W - 2.75"; 120V/60Hz; SWC = Fan and Light Wall Control (AXWS-202): 3 Speed Control; On/Off Light Control; White finish
Ordering example	AXCF9870-BN-BN-20W-30K-SWC AXCF9870-BK-BK-20W-30K-SWC

ETL



50" 4-Blade Fan

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF9874-BN-BN	Standard Blade Package All Brushed Nickel Blades
AXCF9874-BN-WAL	Standard Blade Package All Walnut Blades
AXCF9874-ORB-ORB	Standard Blade Package All Oil Rubbed Bronze Blades
AXCF9874-BK-BK	Standard Blade Package All Black Blades
AXCF9874-WH-WH	Standard Blade Package All White Blades
AXCF9874	50" 4-Blade Fan

ETL	Indoor Applications
Blade Sweep	50"
Blades	4 - Reversible - Plywood
Lead Wire	54"
Motor Type	AC - 153 x 15mm motor
Voltage	120v
Blade Pitch	12°
Downrod Length	6"
Speeds	3 - Reversible Motor
Light Kit	Satin White Glass Diffuser
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Wall Control
Performance - High	CFM 5,695; Watts 59; CFM/Watt 97
Performance - Medium	CFM 3,841; Watts 28; CFM/Watt 136
Performance - Low	CFM 2,889; Watts 11; CFM/Watt 208
Light Kit	Wattage 20w (2x 10W LED); Kelvin 30K; Lumens 1,600; CRI 80

ETL

Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Blades	BN = Brushed Nickel; WAL = Walnut; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Light Kit	20W = 2x 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	SWC = Standard Wall Control; DWC = Dimmable Wall Control
Wall Controls	DWC = Fan and Light Wall Control (AXWS-200): 4 Speed Control; Dual Slide; White finish; Dimmer; H - 4.625" W - 2.75"; 120V/60Hz; SWC = Fan and Light Wall Control (AXWS-202): 3 Speed Control; On/Off Light Control; White finish
Ordering example	AXCF9874-BN-WAL-20W-30K-SWC AXCF9874-BK-BK-20W-30K-SWC



50" 5-Blade Fan

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF9876-BN-BN	Standard Blade Package All Brushed Nickel Blades
AXCF9876-BN-WAL	Standard Blade Package All Walnut Blades
AXCF9876-ORB-ORB	Standard Blade Package All Oil Rubbed Bronze Blades
AXCF9876-BK-BK	Standard Blade Package All Black Blades
AXCF9876-WH-WH	Standard Blade Package All White Blades
AXCF9876	50" 5-Blade Fan

ETL	Indoor Applications
Blade Sweep	50"
Blades	5 - Reversible - Plywood
Lead Wire	54"
Motor Type	AC - 153 x 18mm motor
Voltage	120v
Blade Pitch	12°
Downrod Length	6"
Speeds	3 - Reversible Motor
Light Kit	Satin White Glass Diffuser
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Wall Control
Performance - High	CFM 5,695; Watts 59; CFM/Watt 97
Performance - Medium	CFM 3,841; Watts 28; CFM/Watt 136
Performance - Low	CFM 2,889; Watts 11; CFM/Watt 208
Light Kit	Wattage 20w (2x 10W LED); Kelvin 30K; Lumens 1,600; CRI 80

ETL

Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Blades	BN = Brushed Nickel; WAL = Walnut; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Light Kit	20W = 2x 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	SWC = Standard Wall Control; DWC = Dimmable Wall Control
Wall Controls	DWC = Fan and Light Wall Control (AXWS-200): 4 Speed Control; Dual Slide; White finish; Dimmer; H - 4.625" W - 2.75"; 120V/60Hz; SWC = Fan and Light Wall Control (AXWS-202): 3 Speed Control; On/Off Light Control; White finish
Ordering example	AXCF9876-BN-WAL-20W-30K-SWC AXCF9876-BK-BK-20W-30K-SWC



52" 5-Blade Fan

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF9832-BN-BK	Standard Blade Package Brushed Nickel with Black Blades
AXCF9832-BN-BN	Standard Blade Package Brushed Nickel with Brushed Nickel Blades
AXCF9832-MBK-BK	Standard Blade Package Matte Black with Black Blades
AXCF9832	52" 5-Blade Fan

ETL	Indoor Applications
Blade Sweep	52"
Blades	5 - Non Reversible - ABS
Lead Wire	54"
Motor Type	AC - 153 × 18mm motor
Voltage	120v
Blade Pitch	12°
Downrod Length	6"
Speeds	3 - Reversible Motor
Light Kit	White Opal Glass Diffuser
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Wall Control
Performance - High	CFM 5,212; Watts 52; CFM/Watt 185
Performance - Medium	CFM 3,841; Watts 28; CFM/Watt 138

ETL

Performance - Low	CFM 2,889; Watts 14; CFM/Watt 95
Light Kit	Wattage 20w (2× 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; MB = Matte Black
Blades	BN = Brushed Nickel; BK = Black
Light Kit	20W = 2× 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	SWC = Standard Wall Control; DWC = Dimmable Wall Control
Wall Controls	DWC = Fan and Light Wall Control (AXWS-200): 4 Speed Control; Dual Slide; White finish; Dimmer; H - 4.625" W - 2.75"; 120V/60Hz; SWC = Fan and Light Wall Control (AXWS-202): 3 Speed Control; On/Off Light Control; White finish
Ordering example	AXCF9832-BN-BN-20W-30K-SWC



52" 5-Blade Fan

- These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.
- Can be hung as flush mount or with downrod

Model	Description
AXCF9810-ORB-DCH/WAL	Standard Blade Package Walnut/Dark Cherry Blades
AXCF9810-BN-BN	Standard Blade Package All Brushed Nickel Blades
AXCF9810	52" 5-Blade Fan



ETL	Indoor Applications
Blade Sweep	52"
Blades	5 - Reversible - Plywood
Lead Wire	54"
Motor Type	AC - 153 × 18mm motor
Voltage	120v
Blade Pitch	11°
Downrod Length	6"
Speeds	3 - Reversible Motor
Light Kit	Satin White Glass Diffuser
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Wall Control
Performance - High	CFM 5,232; Watts 57.4; CFM/Watt 91.15
Performance - Medium	CFM 3,496; Watts 33; CFM/Watt 105.94
Performance - Low	CFM 2,254; Watts 13.6; CFM/Watt 165.74

ETL

Light Kit	Wattage 20w (2× 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze
Blades	BN = Brushed Nickel; DCH/WAL = Dark Cherry / Walnut
Light Kit	Blank = None; LK9330 = 2× 10w E26
Kelvin/CCT	30K = 3000°Kelvin
Options	SWC = Standard Wall Control; DWC = Dimmable Wall Control
Wall Controls	DWC = Fan and Light Wall Control (AXWS-200): 4 Speed Control; Dual Slide; White finish; Dimmer; H - 4.625" W - 2.75"; 120V/60Hz; SWC = Fan and Light Wall Control (AXWS-202): 3 Speed Control; On/Off Light Control; White finish
Ordering example	AXCF9810-BN-WAL-LK9330-30K-SWC



50" 3-Curved Blade Fan

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF800-BN-BN	Standard Blade Package All Brushed Nickel Blades
AXCF800-BN-WAL	Standard Blade Package All Walnut Blades
AXCF800-ORB-ORB	Standard Blade Package All Oil Rubbed Bronze Blades
AXCF800-BK-BK	Standard Blade Package All Black Blades
AXCF800-WH-WH	Standard Blade Package All White Blades
AXCF800	50" 3-Curved Blade Fan

ETL	Indoor Applications
Blade Sweep	52"
Blades	3 - Non Reversible - Plywood
Lead Wire	54"
Motor Type	AC - 153 x 15mm motor
Voltage	120v
Blade Pitch	12°
Downrod Length	6"
Speeds	3 - Reversible Motor
Light Kit	Satin White Glass Diffuser
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Pull Chain
Performance - High	CFM 5,313; Watts 54.6; CFM/Watt 97

ETL

Performance - Medium	CFM 3,363; Watts 25; CFM/Watt 134
Performance - Low	CFM 2,060; Watts 9.3; CFM/Watt 221
Light Kit	Wattage 20w (2x 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Blades	BN = Brushed Nickel; WAL = Walnut; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Light Kit	20W = 2x 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	PC = Pull Chain
Ordering example	AXCF800-BN-WAL-20W-30K-PC AXCF800-BK-BK-20W-30K-PC



50" 3-Blade Fan

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF870-BN-BN	Standard Blade Package All Brushed Nickel Blades
AXCF870-BN-WAL	Standard Blade Package All Walnut Blades
AXCF870-ORB-ORB	Standard Blade Package All Oil Rubbed Bronze Blades
AXCF870-BK-BK	Standard Blade Package All Black Blades
AXCF870-WH-WH	Standard Blade Package All White Blades
AXCF870	50" 3-Blade Fan

ETL	Indoor Applications
Blade Sweep	50"
Blades	3 - Reversible - Plywood
Lead Wire	54"
Motor Type	AC - 153 x 15mm motor
Voltage	120v
Blade Pitch	12°
Downrod Length	6"
Speeds	3 - Reversible Motor
Light Kit	Satin White Glass Diffuser
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Pull Chain
Performance - High	CFM 5,420; Watts 65; CFM/Watt 83

ETL

Performance - Medium	CFM 3,450; Watts 33; CFM/Watt 105
Performance - Low	CFM 2,300; Watts 13; CFM/Watt 177
Light Kit	Wattage 20w (2x 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Blades	BN = Brushed Nickel; WAL = Walnut; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Light Kit	20W = 2x 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	PC = Pull Chain
Ordering example	AXCF870-BN-WAL-20W-30K-PC AXCF870-BK-BK-20W-30K-PC



50" 4-Blade Fan

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF874-BN-BN	Standard Blade Package All Brushed Nickel Blades
AXCF874-BN-WAL	Standard Blade Package All Walnut Blades
AXCF874-ORB-ORB	Standard Blade Package All Oil Rubbed Bronze Blades
AXCF874-BK-BK	Standard Blade Package All Black Blades
AXCF874-WH-WH	Standard Blade Package All White Blades
AXCF874	50" 4-Blade Fan

ETL	Indoor Applications
Blade Sweep	50"
Blades	4 - Reversible - Plywood
Lead Wire	54"
Motor Type	AC - 153 x 15mm motor
Voltage	120v
Blade Pitch	12°
Downrod Length	6"
Speeds	3 - Reversible Motor
Light Kit	Satin White Glass Diffuser
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Pull Chain
Performance - High	CFM 5,695; Watts 59; CFM/Watt 97

ETL

Performance - Medium	CFM 3,841; Watts 28; CFM/Watt 136
Performance - Low	CFM 2,889; Watts 11; CFM/Watt 208
Light Kit	Wattage 20w (2x 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Blades	BN = Brushed Nickel; WAL = Walnut; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Light Kit	20W = 2x 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	PC = Pull Chain
Ordering example	AXCF874-BN-WAL-20W-30K-PC AXCF874-BK-BK-20W-30K-PC



50" 5-Blade Fan

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF876-BN-BN	Standard Blade Package All Brushed Nickel Blades
AXCF876-BN-WAL	Standard Blade Package All Walnut Blades
AXCF876-ORB-ORB	Standard Blade Package All Oil Rubbed Bronze Blades
AXCF876-BK-BK	Standard Blade Package All Black Blades
AXCF876-WH-WH	Standard Blade Package All White Blades
AXCF876	50" 5-Blade Fan

ETL	Indoor Applications
Blade Sweep	50"
Blades	5 - Reversible - Plywood
Lead Wire	54"
Motor Type	AC - 153 x 18mm motor
Voltage	120v
Blade Pitch	12°
Downrod Length	6"
Speeds	3 - Reversible Motor
Light Kit	Satin White Glass Diffuser
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Pull Chain
Performance - High	CFM 5,695; Watts 59; CFM/Watt 97

ETL

Performance - Medium	CFM 3,841; Watts 28; CFM/Watt 136
Performance - Low	CFM 2,889; Watts 11; CFM/Watt 208
Light Kit	Wattage 20w (2x 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Blades	BN = Brushed Nickel; WAL = Walnut; ORB = Oil Rubbed Bronze; BK = Black; WH = White
Light Kit	20W = 2x 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	PC = Pull Chain
Ordering example	AXCF876-BN-WAL-20W-30K-PC AXCF876-BK-BK-20W-30K-PC



52" 3-Blade Fan with Optional Light Kit

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF808-BN-BN-LK9330-PC	Standard Blade Package All Brushed Nickel Blades
AXCF808-BN-BK-LK9330-PC	Standard Blade Package All Black Blades
AXCF808	52" 3-Blade Fan with Optional Light Kit

ETL	Indoor Applications
Blade Sweep	52"
Blades	3 - Non Reversible - MDF
Lead Wire	54"
Motor Type	AC - 153 x 15mm motor
Voltage	120v
Blade Pitch	11°
Downrod Length	6"
Speeds	3 - Reversible Motor
Light Kit	Adaptable (Sold Separately)
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Pull Chain

ETL

Performance - High	CFM 5,585; Watts 60.5; CFM/Watt 92.3
Performance - Medium	CFM 3,781; Watts 27; CFM/Watt 137
Performance - Low	CFM 2,751; Watts 10.5; CFM/Watt 262
Light Kit LK9330-20W-30K-PC	Wattage 20w (2x 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel
Blades	BN = Brushed Nickel; BK = Black
Light Kit	Blank = None; LK9330-20W = 2x 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	PC = Pull Chain
Ordering example	AXCF808-BN-BK-LK9330-20W-30K-PC



52" 5-Blade Builder Fan with Optional Light Kit

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF8552-BN-MAP/WAL	Standard Blade Package Maple/Walnut Blades
AXCF8552-WH-WH/WP	Standard Blade Package White/Washed Pine Blades
AXCF8552-ORB-ORB	Standard Blade Package All ORB Blades
LK9334-PC	Shown in WH
LK9330-PC	Shown in BN
AXCF552	52" 5-Blade Builder Fan with Optional Light Kit

ETL	Indoor Applications
Blade Sweep	52"
Blades	5 - Reversible - MDF
Lead Wire	54"
Motor Type	AC - 153 x 13mm motor
Voltage	120v
Blade Pitch	11°
Downrod Length	4.5"
Speeds	3 - Reversible Motor
Light Kit	Adaptable (Sold Separately)
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Pull Chain
Performance - High	CFM 5,232; Watts 57.4; CFM/Watt 91.15
Performance - Medium	CFM 3,496; Watts 33; CFM/Watt 105.94
Performance - Low	CFM 2,254; Watts 13.6; CFM/Watt 165.74

ETL

Light Kit LK9330-20W-30K-PC	Wattage 20w (2x 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Light Kit LK9334-20W-30K-PC	Wattage 20w (2x 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Blades	MAP/WAL = Maple/Walnut; DCH/WAL = Dark Cherry/Walnut; WH/WP = White/Washed Pine; WH/WO = White/Washed Oak; ORB = Oil Rubbed Bronze
Light Kit	LK9330-20W = 2x 10W E26; LK9334-20W = 2x 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	PC = Pull Chain
Ordering example	AXCF552-BN-MAP/WAL-LK9330-20W-30K-PC



52" 5-Blade Fan with Optional Light Kit

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF820-BN-BN-AXLK9334BN	Standard Blade Package All Brushed Nickel Blades
AXCF820-ORB-ORB-AXLK9334ORB	Standard Blade Package All Oil Rubbed Bronze Blades
AXCF820	52" 5-Blade Fan with Optional Light Kit

ETL	Indoor Applications
Blade Sweep	52"
Blades	5 - Reversible - MDF
Lead Wire	54"
Motor Type	AC - 153 × 13mm motor
Voltage	120v
Blade Pitch	12°
Downrod Length	4"
Speeds	3 - Reversible Motor
Light Kit	Adaptable (Sold Separately)
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Pull Chain

Performance - High	CFM 5,419; Watts 65.1; CFM/Watt 83.3
Performance - Medium	CFM 3,454; Watts 32.3; CFM/Watt 107
Performance - Low	CFM 2,306; Watts 1.8; CFM/Watt 195
Light Kit LK9334-20W-30K-PC	Wattage 20w (2× 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze
Blades	BN = Brushed Nickel; ORB = Oil Rubbed Bronze
Light Kit	Blank = None; LK9334-20W = 2× 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	PC = Pull Chain
Ordering example	AXCF820-BN-BN-LK9334-20W-30K-PC

ETL



52" 5-Blade Builder Fan with Optional Light Kit

- These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.
- Can be hung as flush mount or with downrod

Model	Description
AXCF816-ORB-DCH/WAL-AXLK9330ORB	Standard Blade Package Reversible Dark Cherry / Walnut Blades
AXCF816-BN-BN-AXLK9330BN	Standard Blade Package All Brushed Nickel Blades
AXCF816	52" 5-Blade Builder Fan with Optional Light Kit

ETL	Indoor Applications
Blade Sweep	52"
Blades	5 - Reversible - MDF
Lead Wire	54"
Motor Type	AC - 153 × 18mm motor
Voltage	120v
Blade Pitch	11°
Downrod Length	6"
Speeds	3 - Reversible Motor
Light Kit	Adaptable (Sold Separately)
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Pull Chain

Performance - High	CFM 5,232; Watts 57.4; CFM/Watt 91.15
Performance - Medium	CFM 3,496; Watts 33; CFM/Watt 105.94
Performance - Low	CFM 2,254; Watts 13.6; CFM/Watt 165.74
Light Kit LK9330-20W-30K-PC	Wattage 20w (2× 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze
Blades	BN = Brushed Nickel; DCH/WAL = Dark Cherry/Walnut; ORB = Oil Rubbed Bronze
Light Kit	Blank = None; LK9330-20W = 2× 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	PC = Pull Chain
Ordering example	AXCF816-BN-BN-LK9330-20W-30K-PC

ETL



52" 5-Blade Fan with Optional Light Kit

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF806-BN-DCH/MAH-LK9334BN	Standard Blade Package Reversible Dark Cherry / Mahogany Blades
AXCF806-ORB-DCH/WAL-LK9334ORB	Standard Blade Package Reversible Dark Cherry / Walnut Blades
AXCF806-WH-WH/WO-LK9334WH	Standard Blade Package Reversible White / Washed Oak Blades
AXCF806	52" 5-Blade Fan with Optional Light Kit

ETL	Indoor Applications
Blade Sweep	52"
Blades	5 - Reversible - MDF
Lead Wire	54"
Motor Type	AC - 153 × 13mm motor
Voltage	120v
Blade Pitch	12°
Downrod Length	4"
Speeds	3 - Reversible Motor
Light Kit	Adaptable (Sold Separately)
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Pull Chain
Performance - High	CFM 5,419; Watts 65.1; CFM/Watt 83.3

ETL

Performance - Medium	CFM 3,454; Watts 32.3; CFM/Watt 107
Performance - Low	CFM 2,306; Watts 11.8; CFM/Watt 195
Light Kit LK9334-20W-30K-PC	Wattage 20w (2× 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Blades	DCH/WAL = Dark Cherry/Walnut; WH/WO = White/Washed Oak; DCH/MAH = Dark Cherry
Light Kit	Blank = None; LK9334-20W = 2× 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	PC = Pull Chain
Ordering example	AXCF806-WH-WO-LK9334-20W-30K-PC

Outdoor Fans



54” 3-Blade Corridor Fan

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF9858-BN-BN	Standard Blade Package All Black Blades
AXCF9858	54” 3-Blade Corridor Fan

ETL	Damp Location rated. Indoor/Outdoor
Blade Sweep	54”
Blades	3 - Non Reversible - Metal
Lead Wire	54”
Motor Type	AC - 172 × 14mm motor
Voltage	120v
Blade Pitch	8°
Downrod Length	6”
Speeds	4 - Reversible Motor
Control	Wall Control

Performance - 1	CFM 4,850; Watts 59; CFM/Watt 82
Performance - 2	CFM 3,510; Watts 31; CFM/Watt 113
Performance - 3	CFM 2,672; Watts 14; CFM/Watt 191
Performance - 4	CFM 1,820; Watts 10.6; CFM/Watt 172
Finish	BN = Brushed Nickel
Blades	BN = Brushed Nickel
Options	SWC = Standard Wall Control
Wall Controls	SWC = Fan and Light Wall Control (AXWS-202): 3 Speed Control; On/Off Light Control; White finish

Ordering example **AXCF9858-BN-BN-SWC**

- ETL
- Wet Location



52" 5-Blade Builder Fan with Optional Light Kit

These fans deliver contemporary European styling along with comfort and excellent value. Unique design fans have an essence of class and destination.

Model	Description
AXCF8600-BN-MAP	Standard Blade Package All Maple Blades
AXCF8600-WH-WH	Standard Blade Package All White Blades
AXCF8600-ORB-ORB	Standard Blade Package All Oil Rubbed Bronze Blades
AXCF8600-BK-BK	Standard Blade Package All Black Blades
AXCF8600	52" 5-Blade Builder Fan with Optional Light Kit

ETL	Outdoor Applications
Blade Sweep	52"
Blades	5 - Non-Reversible - ABS
Lead Wire	54"
Motor Type	AC - 153 x 13mm motor
Voltage	120v
Blade Pitch	12°
Downrod Length	4"
Speeds	3 - Reversible Motor
Light Kit	Adaptable (Sold Separately)
Socket	2 x E26 10w LED Bulbs, 30K, 800lm (not included)
Control	Pull Chain
Performance - High	CFM 5,172; Watts 57.4; CFM/Watt 90
Performance - Medium	CFM 3,486; Watts 33.2; CFM/Watt 105

ETL Wet Location

Performance - Low	CFM 2,257; Watts 13.3; CFM/Watt 169
Light Kit LK9330-20W-30K-PC	Wattage 20w (2x 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Light Kit LK9330-20W-30K-PC	Wattage 20w (2x 10W LED); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White; BK = Black
Blades	MAP = Maple; ORB = Oil Rubbed Bronze; WH = White; BK = Black
Light Kit	Blank = None; LK9330-20W = 2x 10W E26; LK9334-20W = 2x 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	PC = Pull Chain
Ordering example	AXCF8600-BN-MAP-LK9330-20W-30K-PC

Bad Ass Fans



52", or 72" 6-Blade Industrial Fan with LED Light Kit

- These fans deliver contemporary industrial styling along with comfort and excellent value. Modern looks accentuate the long lasting and reliable fixtures.
- Bad Ass Fans® Provide a stylish and rugged option for any indoor or outdoor application.
- Several size and finish options are available to accentuate your space.

Model	Description
AXCF9662-72-BK-BK	52", or 72" 6-Blade Industrial Fan with LED Light Kit
AXCF9660-52-BN-BN	52", or 72" 6-Blade Industrial Fan with LED Light Kit
AXCF9660	52", or 72" 6-Blade Industrial Fan with LED Light Kit
AXCF9662	52", or 72" 6-Blade Industrial Fan with LED Light Kit

ETL	Damp location rated. Indoor/Outdoor Applications
Blade Sweep	9660 = 52", 9662 = 72"
Blades	6 - Non Reversible - Aluminum
Lead Wire	54"
Motor Type	52" - DC - 100 x 20mm motor 72" - DC - 155 x 16mm motor
Voltage	120v
Blade Pitch	17°
Downrod Length	6"
Speeds	5 - Reversible Motor
Light Kit	Integrated LED - Frosted Glass
Control	Remote Control
Performance - 1	CFM 7,260; Watts 35; CFM/Watt 207

Performance - 2	CFM 6,053; Watts 22; CFM/Watt 275
Performance - 3	CFM 4,886; Watts 12; CFM/Watt 407
Performance - 4	CFM 3,742; Watts 7; CFM/Watt 534
Performance - 5	CFM 2,540; Watts 5; CFM/Watt 508
Light Kit	Wattage 15W; Kelvin 30K; Lumens 920; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White; BK = Black
Blades	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White; BK = Black
Light Kit	15W = 15 Watt Integrated LED
Kelvin/CCT	30K = 3000°Kelvin
Options	RC = Remote Control
Ordering example	AXCF9662-BN-BN-15W-30K-RC

ETL

Wet Location



72" or 84" 6-Blade Industrial Fan with LED Light Kit

These fans deliver contemporary industrial styling along with comfort and excellent value. Modern looks accentuate the long lasting and reliable fixtures.

Model	Description
AXCF9650-72-WH-WH	72" or 84" 6-Blade Industrial Fan with LED Light Kit
AXCF9652-84-ORB-ORB	72" or 84" 6-Blade Industrial Fan with LED Light Kit
AXCF9652-84-BN-BN	72" or 84" 6-Blade Industrial Fan with LED Light Kit
AXCF9650	72" or 84" 6-Blade Industrial Fan with LED Light Kit
AXCF9652	72" or 84" 6-Blade Industrial Fan with LED Light Kit

ETL	Damp location rated. Indoor/Outdoor Applications
Blade Sweep	(AXCF9650) 72", (AXCF9652) 84"
Blades	6 - Non Reversible - Aluminum
Lead Wire	54"
Motor Type	DC - 155 × 16mm motor
Voltage	120v
Blade Pitch	17°
Downrod Length	6"
Speeds	5 - Reversible Motor
Light Kit	Integrated LED - Frosted Glass
Control	Remote Control
Performance - 1	CFM 7,114; Watts 35.1; CFM/Watt 203

Performance - 2	CFM 6,120; Watts 22.8; CFM/Watt 268
Performance - 3	CFM 5,042; Watts 16.1; CFM/Watt 313
Performance - 4	CFM 4,021; Watts 10.4; CFM/Watt 387
Performance - 5	CFM 2,985; Watts 5.5; CFM/Watt 543
Light Kit	Wattage 15W; Kelvin 30K; Lumens 920; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Blades	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Light Kit	15W = 15 Watt integrated LED
Kelvin/CCT	30K - 3000°Kelvin
Options	RC = Remote Control
Ordering example	AXCF9652-BN-BN-15W-30K-RC

ETL Wet Location

Fan Light Kits



Adaptable Integrated LED Light Kits

Add a decorative touch to ceiling fans with classic style light kits.

Model	Description
AXLK9800	Adaptable Integrated LED Light Kits
AXLK9801	Ultra Slim

ETL	Indoor Applications
Housing	Baked on Enamel or Plated Cold Rolled Steel
Lens	Acrylic
Lamping	Integrated LED
Mounting	Ceiling Fan. Includes all necessary hardware.
Finish Options	BK, BN, ORB, WH
Control	Wall Control or Pull Chain

Light Kit AXLK9800	Wattage 15W Integrated LED; Kelvin 30K; Lumens 950; CRI 80
Light Kit AXLK9801	Wattage 15W Integrated LED; Kelvin 30K; Lumens 1,200; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White; BK = Black
Wattage	15W = 15 Watt Integrated LED
Kelvin/CCT	30K - 3000°Kelvin
Options	PC = Pull Chain
Ordering example	AXLK9800-BN-15W-30K-PC

ETL



Adaptable Light Kits

Add a decorative touch to ceiling fans with classic style light kits.

Model	Description
AXLK9330	Adaptable Light Kits
AXLK9334	Adaptable Light Kits
AXLK9360	Adaptable Light Kits
AXLK9345	Adaptable Light Kits

ETL	Indoor Applications
Housing	Baked on Enamel or Plated Cold Rolled Steel
Socket	E26 - Standard
Lamping	2× 10W LED A19
Mounting	Ceiling Fan. Includes all necessary hardware.
Finish Options	BK, BN, ORB, WH
Control	Pull Chain

Light Kit	Wattage 20W; Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White; BK = Black
Glass	AB = Alabaster; FW = Frosted White
Wattage	20W = 2× 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	PC = Pull Chain
Ordering example	AXLK9330-BN-AB-20W-30K-PC

ETL Wet Location



Adaptable Light Kits

Add a decorative touch to ceiling fans with classic style light kits.

Model	Description
AXLK9220	Adaptable Light Kits
AXLK9550	Includes all Metal Finishes (BN/ORB/WH)

ETL	Indoor Applications
Housing	Baked on Enamel or Plated Cold Rolled Steel
Socket	E26 - Standard
Lamping	1x or 2x 10w LED A19
Mounting	Ceiling Fan. Includes all necessary hardware.
Finish Options	BK, BN, ORB, WH
Control	Wall Control or Pull Chain
Light Kit AXLK9220	Wattage 10W (1x 10W E26); Kelvin 30K; Lumens 800; CRI 80

ETL

Light Kit AXLK9550	Wattage 20W (2x 10W E26); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White; BK = Black
Glass	SC = Scavo; OP = Opal; WF = White Frost
Light Kit	10W = 1x 10W E26; 20W = 2x 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	PC = Pull Chain
Ordering example	AXLK9220-BN-WF-10W-30K-PC



Adaptable Light Kits

Add a decorative touch to ceiling fans with classic style light kits.

Model	Description
AXLK9004	4x E26 Sockets
AXLK9003	3x E26 Sockets



ETL	Indoor Applications
Housing	Baked on Enamel or Plated Cold Rolled Steel
Socket	E26 Standard
Lamping	10w LED A19
Mounting	Ceiling Fan. Includes all necessary hardware.
Finish Options	BK, BN, ORB, WH
Control	Wall Control or Pull Chain
Light Kit AXLK9003	Wattage 30w (3x 10W E26); Kelvin 30K; Lumens 2,400; CRI 80; Dimensions 8"W x 2"H

ETL Wet Location

Light Kit AXLK9004	Wattage 40w (4x 10W E26); Kelvin 30K; Lumens 3,200; CRI 80; Dimensions 7.38"W x 1.5"H
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White; BK = Black
Glass	003 = Clear Ribbed; 250 = White Opal; 252 = Alabaster; 270 = Tuscan Scavo
Wattage	30W = 3x 10W E26; 40W = 4x 10W E26
Kelvin/CCT	30K - 3000°Kelvin
Options	PC = Pull Chain
Ordering example	AXLK9003-BN-003-30W-30K

Outdoor Fan Light Kits



Adaptable Light Kits

Add a decorative touch to ceiling fans with classic style light kits.

Model	Description
AXLK9612	2x E26 Sockets
AXLK9614	2x E26 Sockets

ETL	Outdoor Applications
Housing	Baked on Enamel or Plated Cold Rolled Steel
Socket	E26 Standard
Lamping	Integrated LED
Mounting	Ceiling Fan. Includes all necessary hardware.
Finish Options	BK, BN, ORB, WH
Control	Wall Control or Pull Chain
Light Kit AXLK9612	Wattage 20w (2× 10W E26); Kelvin 30K; Lumens 1,600; CRI 80

ETL Wet Location

Light Kit AXLK9614	Wattage 20w (2× 10W E26); Kelvin 30K; Lumens 1,600; CRI 80
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Glass	SC = Scavo; OP = Opal; WF = White Frost
Light Kit	20W = 2× 10W E26
Kelvin/CCT	30K = 3000°Kelvin
Options	PC = Pull Chain
Ordering example	AXLK9612-BN-OP-20W-30K-PC


Wall Controls and Fan Blades



Fan and Light Wall Control
AXWS-200
4 Speed Control; Dual Slide; White Finish; Dimmer; 4.625"H x 2.75"W; 120V/60Hz
4 Speed Control; Dual Slide; White Finish; Dimmer; 4.625"H x 2.75"W; 120V/60Hz



Fan and Light Wall Control
AXWS-202
3 Speed Control; On/Off Control; White Finish
3 Speed Control; On/Off Control; White Finish

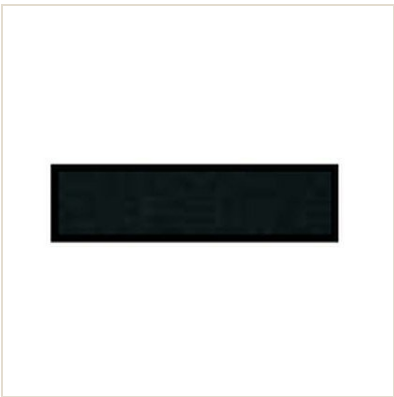

Fan Blade Options

- Part numbers reflect single finishes. For reversible blade finishes, use two part numbers.
- Ex: MAP/WO

Model	Description
FB-BK	Black
FB-BLO	Bleached Oak
FB-BN	Brushed Nickel
FB-CH	Cherry
FB-DCH	Dark Cherry
FB-LO	Light Oak
FB-MAH	Mahogany
FB-MAP	Maple
FB-RW	Rosewood
FB-OAK	Oak
FB-PO	Pickled Oak
FB-WAL	Walnut
FB-WO	Washed Oak
FB-WP	Washed Pine
FB-WH	White

Blade Finish

FB-BK = Black; FB-BLO = Bleached Oak; FB-BN = Brushed Nickel; FB-CH = Cherry; FB-DCH = Dark Cherry; FB-LO = Light Oak; FB-MAH = Mahogany; FB-MAP = Maple; FB-RW = Rosewood; FB-OAK = Oak; FB-PO = Pickled Oak; FB-WAL = Walnut; FB-WO = Washed Oak; FB-WP = Washed Pine; FB-WH = White

Downrods

Where extra height is needed, decorative downrods are the perfect accessory. Downrods are available in a variety of sizes and finishes.




1/2" Double Threaded Downrod

Where extra height is needed, decorative downrods are the perfect accessory. Downrods are available in a variety of sizes and finishes.

Model	Description
AXDR12-BC	1/2" Double Threaded Downrod
AXDR12-BN	1/2" Double Threaded Downrod
AXDR12-CS	1/2" Double Threaded Downrod
AXDR12-ORB	1/2" Double Threaded Downrod
AXDR12-PB	1/2" Double Threaded Downrod
AXDR12-WH	1/2" Double Threaded Downrod

Ordering prefix	AXDR12 = 1/2" Double Threaded Downrod
Length	12 = 12"; 18 = 18"; 24 = 24"; 30 = 30"; 36 = 36"; 48 = 48"; 60 = 60"; 72 = 72"
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White; BC = Brushed Chrome; CS = Cobblestone; PB = Polished Brass
Ordering example	AXDR12-24-BN

ETL



1/2" Downrod Coupler

Model	Description
AXRC-BC	1/2" Downrod Coupler
AXRC-BN	1/2" Downrod Coupler
AXRC-CS	1/2" Downrod Coupler
AXRC-ORB	1/2" Downrod Coupler
AXRC-PB	1/2" Downrod Coupler
AXRC-WH	1/2" Downrod Coupler

Ordering prefix	AXRC = 1/2" Downrod Coupler
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White; BC = Brushed Chrome; CS = Cobblestone; PB = Polished Brass

ETL

LIGHTING

LED Lighting

LED Disk Lights

Ultra-Thin Round Disk Lights

Low Profile Round Disk Lights

Ultra-Thin Square Disk Lights

Temporary Jobsite Disk Lights

LED Outdoor

LED Utility

LED Area Lights

Flood Lights

Canopy Lights

Garden Bollards

Pole Wind Ratings and Light Distribution

Patterns

Shoebox Area Lights

Designer Post Tops

Poles

String Lights

LED Track Lights

LED Exit and Emergency

LED Lamps



LED Disk Lights

4", 6", and 8" LED Disk Lights

Easy and cost effective solutions to replacing recessed can lights!

LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Series overview

Part	Available Finishes	Kelvin/CCT	Voltage	Dimensions	Lumens	CRI	Dimmable	Special Functions
AX504-8W	BN • ORB • WH	CCT Selectable (30K/40K)	AC 120V	5.9" OD x 1.2" H	570	90	Tri-arc	Surface, Wet, Retrofit
AX506-10W	BN • ORB • WH	CCT Selectable (30K/40K)	AC 120V	7.4" OD x 1.2" H	800	90	Tri-arc	Surface, Wet, Retrofit
AX506-15W	BN • ORB • WH	CCT Selectable (30K/40K)	AC 120V	7.4" OD x 1.2" H	1,050	90	Tri-arc	Surface, Wet, Retrofit
AX508-30W	BN • ORB • WH	CCT Selectable (30K/40K)	AC 120V	9.5" OD x 1.2" H	2,200	90	Tri-arc	Surface, Wet, Retrofit
AX506-16W	BN • ORB • WH	30K • 40K	AC 277V	7.4" OD x 1.2" H	1,000	90	No	Surface, 277V ONLY
AX508-32W	BN • ORB • WH	30K • 40K	AC 277V	9.5" OD x 1.2" H	1,900	90	No	Surface, 277V ONLY
AXEM506	BN • ORB • WH	30K • 40K	AC 120V	7.4" OD x 1.2" H	1,095	81	No	Emergency Battery Back-up
AXEM508	BN • ORB • WH	30K • 40K	AC 120V	9.5" OD x 1.2" H	2,200	81	No	Emergency Battery Back-up



Surface Mount Disk


- Replaces 4" Recessed Can Light - Retrofit Kit Available
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AX504	Surface Mount Disk
AX504-8W	Available Finishes: BN • ORB • WH; Kelvin/CCT: CCT Selectable (30K/40K); Voltage: AC 120V; Dimensions: 5.9" OD x 1.2" H; Lumens: 570; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet, Retrofit



UL or ETL Listing	Wet Locations	Dimmable	Tri-arc, T24, JA8
Certifications	Title 24, JA8 Certified DLC Certified Energy Star Qualified	Operating Temp.	(-20° to -40°C) (25°C Nominal)
Dimensions	1.2" Height x 5.9" Outside Diameter	Surge Protection	1 kv
Housing	Stamped Steel	Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Lens/Diffuser	Opal Acrylic - Twist On/Off	Wattage	8W = 8 Watts
Voltage	AC 110-120v - Driverless	Kelvin/CCT	CCT Selectable (30K, 40K)
Wattage	8w	Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Lumens	570	Options	AX888 = Recessed Can Retrofit Kit
CRI	80	Ordering example	AX504-8W-CCT-BN-AX888
Kelvin	CCT Selectable (30K, 40K)		
Flicker	T24, JA8 - Flicker Free		

Title 24, JA8 Certified DLC Certified Energy Star Qualified ETL Wet Location



Surface Mount Disk


- Replaces 6" Recessed Can Light - Retrofit Kit Available
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AX506	Surface Mount Disk
AX506-10W	Available Finishes: BN • ORB • WH; Kelvin/CCT: CCT Selectable (30K/40K); Voltage: AC 120V; Dimensions: 7.4" OD x 1.2" H; Lumens: 800; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet, Retrofit
AX506-15W	Available Finishes: BN • ORB • WH; Kelvin/CCT: CCT Selectable (30K/40K); Voltage: AC 120V; Dimensions: 7.4" OD x 1.2" H; Lumens: 1,050; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet, Retrofit

UL or ETL Listing	Wet Locations
Certifications	Title 24, JA8 Certified DLC Certified Energy Star Qualified
Dimensions	1.2" Height x 7.4" Outside Diameter
Housing	Stamped Steel
Lens/Diffuser	Opal Acrylic - Twist On/Off
Voltage	AC 110-120v - Driverless
Wattage	10w, 15w
Lumens	800, 1050
CRI	80
Kelvin	CCT Selectable (30K, 40K)
Flicker	(T24, JA8) Flicker Free

Dimmable	(Tri-arc, T24, JA8)
Operating Temp.	(-20° to -40°C) (25°C Nominal)
Surge Protection	1 kv
Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Wattage	10W = 10 Watts; 15W = 15 Watts
Kelvin/CCT	CCT = Selectable (30K, 40K)
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Options	AX888 = Recessed Can Retrofit Kit
Ordering example	AX506-10W-CCT-BN-AX888

[Title 24, JA8 Certified](#)
[DLC Certified](#)
[Energy Star Qualified](#)
[ETL](#)
[Wet Location](#)



6" Disk w/ Emergency Back-Up

- Replaces 6" Recessed Can Light - Retrofit Kit Available
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.
- 0. Knock-Outs
- 1. J-Box
- 2. Installing Frame
- 3. Battery
- 4. Electronic Control
- 5. Indicator Light
- 6. Test Switch
- 7. Surface Mount
- 8. Diffuser
- Trim does not fit in all J-Boxes
- Will not fit in pancake J-Boxes.

Model	Description
AXEM506	6" Disk w/ Emergency Back-Up; Available Finishes: BN • ORB • WH; Kelvin/CCT: 30K • 40K; Voltage: AC 120V; Dimensions: 7.4" OD x 1.2" H; Lumens: 1,095; CRI: 81; Dimmable: No; Special Functions: Emergency Battery Back-up
AXEM506-BATT	Shipped at Rough-In
AXEM506-TRIM	Shipped at Trim Out

UL or ETL Listing	Wet Locations
Certifications	Title 24, JA8 Certified DLC Certified
Dimensions	1.2" Height x 7.4" Outside Diameter
Housing	Stamped Steel
Lens/Diffuser	UV Rated Polycarbonate
Voltage	AC 110-120v - Driverless
Wattage	15w (EM: 6w)
Lumens	1,095lm (EM: 400lm)
CRI	81
Kelvin	30K, 40K
Emergency Mode	Up to 90 Minutes

Flicker	(T24, JA8) Flicker Free
Dimmable	Tri-arc, T24, JA8
Operating Temp.	(-20° to -40°C) (25°C Nominal)
Surge Protection	1 kv
Mounting	Requires included battery rough-in housing (AXEM508-BATT).
Wattage	15W = 15 Watts
Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Ordering example	AXEM506-15W-30K-BN

[Title 24, JA8 Certified](#)
[DLC Certified](#)
[ETL](#)
[Wet Location](#)



Surface Mount Disk


- Replaces 8" Recessed Can Light - Retrofit Kit Available
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AX508	Surface Mount Disk
AX508-30W	Available Finishes: BN • ORB • WH; Kelvin/CCT: CCT Selectable (30K/40K); Voltage: AC 120V; Dimensions: 9.5" OD x 1.2" H; Lumens: 2,200; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet, Retrofit

UL or ETL Listing	Wet Locations
Certifications	Title 24, JA8 Certified DLC Certified Energy Star - Qualified
Dimensions	1.2" Height x 9.5" Outside Diameter
Housing	Stamped Steel
Lens/Diffuser	Opal Acrylic - Twist On/Off
Voltage	AC 110-120v - Driverless
Wattage	30w
Lumens	2200
CRI	80
Kelvin	CCT Selectable (30K, 40K)
Flicker	(T24, JA8) Flicker Free

Dimmable	Tri-arc, T24, JA8
Operating Temp.	(-20° to -40°C) (25°C Nominal)
Surge Protection	1 kv
Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Wattage	30W = 30 Watts
Kelvin/CCT	CCT = Selectable (30K, 40K)
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Options	AX888 = Recessed Can Retrofit Kit
Ordering example	AX508-30W-CCT-BN-AX888

[Title 24, JA8 Certified](#)
[DLC Certified](#)
[Energy Star - Qualified](#)
[ETL](#)
[Wet Location](#)



8" Disk w/ Emergency Back-Up

- Replaces 8" Recessed Can Light - Retrofit Kit Available
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.
- 0. Knock-Outs
- 1. J-Box
- 2. Installing Frame
- 3. Battery
- 4. Electronic Control
- 5. Indicator Light
- 6. Test Switch
- 7. Surface Mount
- 8. Diffuser
- Trim does not fit in all J-Boxes
- Will not fit in pancake J-Boxes.

Model	Description
AXEM508	8" Disk w/ Emergency Back-Up; Available Finishes: BN • ORB • WH; Kelvin/CCT: 30K • 40K; Voltage: AC 120V; Dimensions: 9.5" OD x 1.2" H; Lumens: 2,200; CRI: 81; Dimmable: No; Special Functions: Emergency Battery Back-up
AXEM508-BATT	Shipped at Rough-In
AXEM508-TRIM	Shipped at Trim Out

UL or ETL Listing	Wet Locations
Certifications	Title 24, JA8 Certified DLC Certified
Dimensions	1.2" Height x 9.5" Outside Diameter
Housing	Stamped Steel
Lens/Diffuser	UV Rated Polycarbonate
Voltage	AC 110-120v - Driverless
Wattage	30w (EM: 12w)
Lumens	2,200lm (EM: 880lm)
CRI	81
Kelvin	30K, 40K
Emergency Mode	Up to 90 Minutes

Flicker	(T24, JA8) Flicker Free
Dimmable	Tri-arc, T24, JA8
Operating Temp.	(-20° to -40°C) (25°C Nominal)
Surge Protection	1 kv
Mounting	Requires included battery rough-in housing (AXEM508-BATT).
Wattage	30W = 30 Watts
Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Ordering example	AXEM508-30W-30K-BN

[Title 24, JA8 Certified](#)
[DLC Certified](#)
[ETL](#)
[Wet Location](#)



277V Only Surface Mount Disk

- Replaces 6" & 8" Recessed Can Lights - 277v ONLY - Retrofit Kit Available
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AX506-277V	277V Only Surface Mount Disk; 1.2" Height x 7.4" O.D.; 16W; 1,000 lumens
AX508-277V	277V Only Surface Mount Disk; 1.2" Height x 9.5" O.D.; 32W; 1,900 lumens
AX506-16W	Available Finishes: BN • ORB • WH; Kelvin/CCT: 30K • 40K; Voltage: AC 277V; Dimensions: 7.4" OD x 1.2" H; Lumens: 1,000; CRI: 90; Dimmable: No; Special Functions: Surface, 277V ONLY
AX508-32W	Available Finishes: BN • ORB • WH; Kelvin/CCT: 30K • 40K; Voltage: AC 277V; Dimensions: 9.5" OD x 1.2" H; Lumens: 1,900; CRI: 90; Dimmable: No; Special Functions: Surface, 277V ONLY

UL or ETL Listing	Wet Locations
Certifications	ETL
Dimensions	AX506-277V = 1.2" Height x 7.4" O.D. AX508-277V = 1.2" Height x 9.5" O.D.
Housing	Stamped Steel
Lens/Diffuser	Opal Acrylic - Twist On/Off
Voltage	AC 277v - Driverless
Wattage	AX506-277V = 16W AX508-277V = 32W
Lumens	AX506-277V = 1,000 AX508-277V = 1,900
CRI	80
Kelvin	30K
Dimmable	Non-Dimmable

ETL

Wet Location



Operating Temp.	(-20° to -40°C) (25°C Nominal)
Surge Protection	1 kv
Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Wattage	16W = 16 Watts; 32W = 32 Watts
Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Options	AX888 = Recessed Can Retrofit Kit
Ordering example	AX508-277V-32W-30K-BN-AX888



6" LED Pancake Disk Light

- Replaces 6" Recessed Can Light - Retrofit Kit Available
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.


Model	Description
AX890	6" LED Pancake Disk Light



UL or ETL Listing	Wet Locations
Dimensions	1" Height x 7.5" Outside Diameter
Housing	Stamped Steel
Lens/Diffuser	Opal Acrylic - Screw in
Voltage	120V
Wattage	15W
Lumens	800lm
CRI	90
Kelvin	30K, 40K

ETL Wet Location

Dimmable	Tri-arc
Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes.
Wattage	15W = 15 Watts
Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Options	AX888 = Recessed Can Retrofit Kit
Ordering example	AX890-15W-30K-WH



Retrofit Kit

- Whether you're installing as a retrofit or a surface mount luminaire, everything you need is included in the box.
- Retrofit Kit includes: LED Disk Light (1)
- Mounting Bracket (1)
- Springs Mounting Clip (2)
- Quick Connector (1)
- Mounting Screws (2)
- E26 Lamp Holder Adapter (1)
- Wire Nuts (3)
- Power Connector (1)
- Gasket (1)
- Instructions Sheet (1)

Model	Description
AX888	Recessed Can Retrofit Kit

LED LIGHTING

Ultra-Thin Round Disk Lights

LED Disk Lights

LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Series overview

Part	Available Finishes	Voltage	Wattage	Kelvin/ CCT	Dimensions	Lumens	CRI	Dimmable	Special Functions
AX604	BN • ORB • WH	AC 120V	10W	30K • 40K	5.5" OD x .79" H	600	90	Tri-arc	Surface, Wet
AX606	BN • ORB • WH	AC 120V	15W	30K • 40K	7" OD x .79" H	1,050	90	Tri-arc	Surface, Wet
AX608-15W	BN • ORB • WH	AC 120V	15W	30K • 40K	9" OD x .79" H	1,050	90	Tri-arc	Surface, Wet
AX608-18W	BN • ORB • WH	AC 120V	18W	30K • 40K	9" OD x .79" H	1,600	90	Tri-arc	Surface, Wet
AX610	BN • ORB • WH	AC 120V	25W	30K • 40K	12" OD x .79" H	2,200	90	Tri-arc	Surface, Wet



4" Ultra Thin Round Surface Mount Disk

- Replaces 4" Recessed Can Light
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AX604	4" Ultra Thin Round Surface Mount Disk; Available Finishes: BN • ORB • WH; Voltage: AC 120V; Wattage: 10W; Kelvin/ CCT: 30K • 40K; Dimensions: 5.5" OD x .79" H; Lumens: 600; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet



UL or ETL Listing	Wet Locations	Dimmable	Tri-arc
Certifications	Title 24, JA8 Certified DLC Certified Energy Star Qualified	Operating Temp.	(-20° to -40°C) (25°C Nominal)
Dimensions	.79" Height x 5.5" Outside Diameter	Surge Protection	1 kv
Housing	Stamped Steel	Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Lens/Diffuser	Flat Glass Lens	Wattage	10W = 10 Watts
Voltage	AC 110-120v - Driverless	Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Wattage	10w	Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Lumens	600	Ordering example	AX604-10W-30K-BN
CRI	90		
Kelvin	30K, 40K		
Flicker	(T24, JA8) Flicker Free		

Title 24, JA8 Certified

DLC Certified

Energy Star Qualified

ETL


Wet Location



6" Ultra Thin Round Surface Mount Disk

- Replaces 6" Recessed Can Light
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AX606	6" Ultra Thin Round Surface Mount Disk; Available Finishes: BN • ORB • WH; Voltage: AC 120V; Wattage: 15W; Kelvin/ CCT: 30K • 40K; Dimensions: 7" OD x .79" H; Lumens: 1,050; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet



UL or ETL Listing	Wet Locations	Dimmable	Tri-arc
Certifications	Title 24, JA8 Certified DLC Certified Energy Star Qualified	Operating Temp.	(-20° to -40°C) (25°C Nominal)
Dimensions	.79" Height x 7" Outside Diameter	Surge Protection	1 kv
Housing	Stamped Steel	Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Lens/Diffuser	Flat Glass Lens	Wattage	15W = 15 Watts
Voltage	AC 110-120v - Driverless	Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Wattage	15w	Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Lumens	1,050	Ordering example	AX606-15W-30K-BN
CRI	90		
Kelvin	30K, 40K		
Flicker	(T24, JA8) Flicker Free		

Title 24, JA8 Certified DLC Certified Energy Star Qualified ETL Wet Location



8" Ultra Thin Round Surface Mount Disk


- Replaces 8" Recessed Can Light
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AX608	8" Ultra Thin Round Surface Mount Disk
AX608-15W	Available Finishes: BN • ORB • WH; Voltage: AC 120V; Wattage: 15W; Kelvin/CCT: 30K • 40K; Dimensions: 9" OD x .79" H; Lumens: 1,050; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet
AX608-18W	Available Finishes: BN • ORB • WH; Voltage: AC 120V; Wattage: 18W; Kelvin/CCT: 30K • 40K; Dimensions: 9" OD x .79" H; Lumens: 1,600; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet

UL or ETL Listing	Wet Locations
Certifications	Title 24, JA8 Certified DLC Certified Energy Star Qualified
Dimensions	.79" Height x 9" Outside Diameter
Housing	Stamped Steel
Lens/Diffuser	Flat Glass Lens
Voltage	AC 110-120v - Driverless
Wattage	15w, 18w
Lumens	1,050, 1,600
CRI	90
Kelvin	30K, 40K
Flicker	(T24, JA8) Flicker Free

Dimmable	Tri-arc
Operating Temp.	(-20° to -40°C) (25°C Nominal)
Surge Protection	1 kv
Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Wattage	15W = 15 Watts; 18W = 18 Watts
Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Ordering example	AX608-15W-30K-BN

[Title 24, JA8 Certified](#)
[DLC Certified](#)
[Energy Star Qualified](#)
[ETL](#)
[Wet Location](#)



12" Ultra Thin Round Surface Mount Disk

- Replaces 12" Recessed Can Light
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AX610	12" Ultra Thin Round Surface Mount Disk; Available Finishes: BN • ORB • WH; Voltage: AC 120V; Wattage: 25W; Kelvin/ CCT: 30K • 40K; Dimensions: 12" OD x .79" H; Lumens: 2,200; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet

UL or ETL Listing	Wet Locations	Dimmable	Tri-arc
Certifications	Title 24, JA8 Certified DLC Certified Energy Star Qualified	Operating Temp.	(-20° to -40°C) (25°C Nominal)
Dimensions	.79" Height x 12" Outside Diameter	Surge Protection	1 kv
Housing	Stamped Steel	Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Lens/Diffuser	Flat Glass Lens	Wattage	25W = 25 Watts
Voltage	AC 110-120v - Driverless	Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Wattage	25w	Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Lumens	2,200	Ordering example	AX610-25W-30K-BN
CRI	90		
Kelvin	30K, 40K		
Flicker	(T24, JA8) Flicker Free		

[Title 24, JA8 Certified](#)
[DLC Certified](#)
[Energy Star Qualified](#)
[ETL](#)
[Wet Location](#)

LED LIGHTING

Low Profile Round Disk Lights

LED Disk Lights

LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Series overview

Part	Available Finishes	Voltage	Wattage	Kelvin/ CCT	Dimensions	Lumens	CRI	Dimmable	Special Functions
AX626	BN • ORB • WH	AC 120V	15W	30K • 40K	7.2" OD x 1.2" H	1,050	90	Tri-arc	Surface, Wet
AX628	BN • ORB • WH	AC 120V	20W	30K • 40K	8.5" OD x 1.2" H	1,400	90	Tri-arc	Surface, Wet
AX630	BN • ORB • WH	AC 120V	25W	30K • 40K	11.5" OD x 1.2" H	1,750	90	Tri-arc	Surface, Wet



6" Low Profile Round Surface Mount Disk

- Replaces 6" Recessed Can Light
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AX626	6" Low Profile Round Surface Mount Disk; Available Finishes: BN • ORB • WH; Voltage: AC 120V; Wattage: 15W; Kelvin/ CCT: 30K • 40K; Dimensions: 7.2" OD x 1.2" H; Lumens: 1,050; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet

UL or ETL Listing	Wet Locations	Dimmable	Tri-arc
Certifications	Title 24, JA8 Certified DLC Certified Energy Star Qualified	Operating Temp.	(-20° to -40°C) (25°C Nominal)
Dimensions	1.2" Height x 7.2" Outside Diameter	Surge Protection	1 kv
Housing	Stamped Steel	Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Lens/Diffuser	Flat Glass Lens	EM Back-Up	See page 58
Voltage	AC 110-120v - Driverless	Wattage	15W = 15 Watts
Wattage	15w	Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Lumens	1,050	Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
CRI	80	Ordering example	AX626-15W-30K-BN
Kelvin	30K, 40K		
Flicker	(T24, JA8) Flicker Free		

[Title 24, JA8 Certified](#)
[DLC Certified](#)
[Energy Star Qualified](#)
[ETL](#)
[Wet Location](#)



6" Disk w/ Emergency Back-Up

- Replaces 6" Recessed Can Light - Retrofit Kit Available
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AXEM626	6" Disk w/ Emergency Back-Up



UL or ETL Listing	Wet Locations	Dimmable	No
Certifications	Title 24, JA8 Certified DLC Certified	Operating Temp.	(-20° to -40°C) (25°C Nominal)
Dimensions	1.2" Height x 7.2" Outside Diameter	Surge Protection	1 kv
Housing	Stamped Steel	Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Lens/Diffuser	UV Rated Polycarbonate	Wattage	15W = 15 Watts
Voltage	AC 110-120v - Driverless	Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Wattage	15w (EM: 6w)	Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Lumens	1,050lm (EM: 400lm)	Options	AX888 = Retrofit Kit
CRI	80	Ordering example	AXEM626-15W-30K-WH
Kelvin	30K, 40K		
Emergency Mode	Up to 90 Minutes		
Flicker	(T24, JA8) Flicker Free		

[Title 24, JA8 Certified](#)
[DLC Certified](#)
[ETL](#)
[Wet Location](#)



8" Low Profile Round Surface Mount Disk

- Replaces 6" Recessed Can Light
- Replaces 8" Recessed Can Light
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AX628	8" Low Profile Round Surface Mount Disk; Available Finishes: BN • ORB • WH; Voltage: AC 120V; Wattage: 20W; Kelvin/ CCT: 30K • 40K; Dimensions: 8.5" OD x 1.2" H; Lumens: 1,400; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet

UL or ETL Listing	Wet Locations	Dimmable	Tri-arc
Certifications	Title 24, JA8 Certified DLC Certified Energy Star Qualified	Operating Temp.	(-20° to -40°C) (25°C Nominal)
Dimensions	1.2" Height x 8.5" Outside Diameter	Surge Protection	1 kv
Housing	Stamped Steel	Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Lens/Diffuser	Flat Glass Lens	EM Back-Up	See page 60
Voltage	AC 110-120v - Driverless	Wattage	20W = 20 Watts
Wattage	20w	Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Lumens	1,400	Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
CRI	80	Ordering example	AX628-15W-30K-BN
Kelvin	30K, 40K		
Flicker	(T24, JA8) Flicker Free		

[Title 24, JA8 Certified](#)
[DLC Certified](#)
[Energy Star Qualified](#)
[ETL](#)
[Wet Location](#)



8" Disk w/ Emergency Back-Up

- Replaces 6" Recessed Can Light - Retrofit Kit Available
- Replaces 8" Recessed Can Light - Retrofit Kit Available
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AXEM628	8" Disk w/ Emergency Back-Up



UL or ETL Listing	Wet Locations
Certifications	Title 24, JA8 Certified DLC Certified
Dimensions	1.2" Height x 8.5" Outside Diameter
Housing	Stamped Steel
Lens/Diffuser	UV Rated Polycarbonate
Voltage	AC 110-120v - Driverless
Wattage	20w (EM: 8w)
Lumens	1,400lm (EM: 560lm)
CRI	80
Kelvin	30K, 40K
Emergency Mode	Up to 90 Minutes
Flicker	(T24, JA8) Flicker Free

Dimmable	No
Operating Temp.	(-20° to -40°C) (25°C Nominal)
Surge Protection	1 kv
Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Wattage	20W = 20 Watts
Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Options	AX888 = Retrofit Kit
Ordering example	AXEM628-20W-30K-WH


[Title 24, JA8 Certified](#)
[DLC Certified](#)
[ETL](#)
[Wet Location](#)



10" Low Profile Round Surface Mount Disk

- Replaces 10" Recessed Can Light
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AX630	10" Low Profile Round Surface Mount Disk; Available Finishes: BN • ORB • WH; Voltage: AC 120V; Wattage: 25W; Kelvin/ CCT: 30K • 40K; Dimensions: 11.5" OD x 1.2" H; Lumens: 1,750; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet



UL or ETL Listing	Wet Locations	Dimmable	Tri-arc
Certifications	Title 24, JA8 Certified DLC Certified Energy Star Qualified	Operating Temp.	(-20° to -40°C) (25°C Nominal)
Dimensions	1.2" Height x 12" Outside Diameter	Surge Protection	1 kv
Housing	Stamped Steel	Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Lens/Diffuser	Flat Glass Lens	Wattage	25W = 25 Watts
Voltage	AC 110-120v - Driverless	Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Wattage	25w	Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Lumens	1,750	Ordering example	AX630-25W-30K-BN
CRI	80		
Kelvin	30K, 40K		
Flicker	(T24, JA8) Flicker Free		

Title 24, JA8 Certified DLC Certified Energy Star Qualified ETL Wet Location

LED LIGHTING

Ultra-Thin Square Disk Lights

LED Square Disk Lights

LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Series overview

Part	Available Finishes	Voltage	Wattage	Kelvin/ CCT	Dimensions	Lumens	CRI	Dimmable	Special Functions
AX704	BN • ORB • WH	AC 120V	8W	30K • 40K	5.5" OD x 1" H	660	90	Tri-arc	Surface, Wet
AX706	BN • ORB • WH	AC 120V	15W	30K • 40K	6.28" OD x 1" H	1,000	90	Tri-arc	Surface, Wet
AX708	BN • ORB • WH	AC 120V	18W	30K • 40K	8" OD x 1" H	1,200	90	Tri-arc	Surface, Wet
AX710	BN • ORB • WH	AC 120V	23W	30K • 40K	12" OD x 1" H	1,850	90	Tri-arc	Surface, Wet



4" Ultra-Thin Square Surface Mount Disk

- Replaces 4" Recessed Can Light
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AX704	4" Ultra-Thin Square Surface Mount Disk; Available Finishes: BN • ORB • WH; Voltage: AC 120V; Wattage: 8W; Kelvin/ CCT: 30K • 40K; Dimensions: 5.5" OD x 1" H; Lumens: 660; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet



UL or ETL Listing	Wet Locations	Dimmable	Tri-arc
Certifications	Title 24, JA8 Certified DLC Certified Energy Star Qualified	Operating Temp.	(-20° to -40°C) (25°C Nominal)
Dimensions	.625" Height x 5.5" Outside Diameter	Surge Protection	1 kv
Housing	Stamped Steel	Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Lens/Diffuser	Flat Glass Lens	Wattage	8W = 8 Watts
Voltage	AC 110-120v - Driverless	Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Wattage	8w	Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Lumens	660	Ordering example	AX704-8W-30K-BN
CRI	90		
Kelvin	30K, 40K		
Flicker	(T24, JA8) Flicker Free		

Title 24, JA8 Certified

DLC Certified

Energy Star Qualified

ETL

Wet Location



6" Ultra-Thin Square Surface Mount Disk

- Replace 6" Recessed Can Light
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AX706	6" Ultra-Thin Square Surface Mount Disk; Available Finishes: BN • ORB • WH; Voltage: AC 120V; Wattage: 15W; Kelvin/ CCT: 30K • 40K; Dimensions: 6.28" OD x 1" H; Lumens: 1,000; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet

UL or ETL Listing	Wet Locations
Certifications	Title 24, JA8 Certified DLC Certified Energy Star Qualified
Dimensions	.625" Height x 6.28" Outside Diameter
Housing	Stamped Steel
Lens/Diffuser	Flat Glass Lens
Voltage	AC 110-120v - Driverless
Wattage	15w
Lumens	1,000
CRI	90
Kelvin	30K, 40K
Flicker	(T24, JA8) Flicker Free

Dimmable	Tri-arc
Operating Temp.	(-20° to -40°C) (25°C Nominal)
Surge Protection	1 kv
Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Wattage	15W = 15 Watts
Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Ordering example	AX706-15W-30K-BN

[Title 24, JA8 Certified](#)
[DLC Certified](#)
[Energy Star Qualified](#)
[ETL](#)
[Wet Location](#)



8" Ultra-Thin Square Surface Mount Disk

- Replaces 8" Recessed Can Light
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
AX708	8" Ultra-Thin Square Surface Mount Disk; Available Finishes: BN • ORB • WH; Voltage: AC 120V; Wattage: 18W; Kelvin/ CCT: 30K • 40K; Dimensions: 8" OD x 1" H; Lumens: 1,200; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet

UL or ETL Listing	Wet Locations
Certifications	Title 24, JA8 Certified DLC Certified Energy Star Qualified
Dimensions	.625" Height x 8" Outside Diameter
Housing	Stamped Steel
Lens/Diffuser	Flat Glass Lens
Voltage	AC 110-120v - Driverless
Wattage	18w
Lumens	1,200
CRI	90
Kelvin	30K, 40K
Flicker	(T24, JA8) Flicker Free

Dimmable	Tri-arc
Operating Temp.	(-20° to -40°C) (25°C Nominal)
Surge Protection	1 kv
Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Wattage	18W = 18 Watts
Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Ordering example	AX708-18W-30K-BN

[Title 24, JA8 Certified](#)
[DLC Certified](#)
[Energy Star Qualified](#)
[ETL](#)
[Wet Location](#)



10" Ultra-Thin Square Surface Mount Disk

- Replace 10" Recessed Can Light
- LED flush mounts add class to any decor. Low profile design ideally suited for showers, lobbies, corridors, conference rooms, common spaces, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments.

Model	Description
-------	-------------


AX710	10" Ultra-Thin Square Surface Mount Disk; Available Finishes: BN • ORB • WH; Voltage: AC 120V; Wattage: 23W; Kelvin/ CCT: 30K • 40K; Dimensions: 12" OD x 1" H; Lumens: 1,850; CRI: 90; Dimmable: Tri-arc; Special Functions: Surface, Wet
-------	--



UL or ETL Listing	Wet Locations	Dimmable	Tri-arc
Certifications	Title 24, JA8 Certified DLC Certified Energy Star Qualified	Operating Temp.	(-20° to -40°C) (25°C Nominal)
Dimensions	.625" Height x 12" Outside Diameter	Surge Protection	1 kv
Housing	Stamped Steel	Mounting	Ceiling, includes all necessary hardware. Mounts to most 4" x 4" J boxes. Suitable for installation within closets and/or storage spaces per NEC code 410.16.
Lens/Diffuser	Flat Glass Lens	Wattage	23W = 23 Watts
Voltage	AC 110-120v - Driverless	Kelvin/CCT	30K = 3000°K; 40K = 4000°K
Wattage	23w	Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White
Lumens	1,850	Ordering example	AX710-23W-30K-BN
CRI	90		
Kelvin	30K, 40K		
Flicker	(T24, JA8) Flicker Free		

Title 24, JA8 Certified DLC Certified Energy Star Qualified ETL Wet Location

Temporary Jobsite Disk Lights



Temporary Round Disk, Jobsite Lighting


- Install over the J-Box and it doesn't have to be removed until you are ready to install a permanent light fixture. 2 screws and quick connects make installation a breeze!
- Unlike permanent lighting, temporary lighting is installed on a job-site while working to ensure maximum illumination while working. The ability to keep the temporary fixture installed until after sheet rock is installed ensures maximum utility.
- Features: Quick & Easy Mounting
- Temporary Light Source
- 10.5 watts & 950 Lumens
- ETL Damp Location
- 25,000 Hr. Rated
- Doesn't impede sheet rock installation
- Product label: CONFORMS to STD. 1598
- CERTIFIED to CSA STD C22.2 No. 250.0
- Rating: 120VAC 60Hz 10.5W
- Model No: AXTD404-10.5W-40K-WH
- Made in China "ABI" LED2113

Model	Description
AXTD404	Temporary Round Disk, Jobsite Lighting
AXTD404-10.5W-40K-WH	Model No. printed on the product label shown on the page

UL or ETL Listing	Damp Locations
Certifications	ETL
Dimensions	.59" Height x 4.13" Outside Diameter
Housing	Stamped Steel
Lens/Diffuser	UV Rated Polycarbonate
Voltage	AC 120v
Wattage	10.5w
Lumens	950lm
CRI	90

Kelvin	40K (30K available by special order)
Dimmable	10% on most dimmers
Operating Temp.	(-20° to -40°C) (25°C Nominal)
Mounting	Mounts to most 4" J boxes
Wattage	10.5W = 10.5 Watts
Kelvin/CCT	30K = 3000°K*; 40K = 4000°K (30K by special order only)
Finish	WH = White
Ordering example	AXTD404-10.5W-120V-30K-WH

ETL Safety First Wet Location



Temporary Vertical Disk, Jobsite Lighting

- Install over the J-Box and it doesn't have to be removed until you are ready to install a permanent light fixture. 2 screws and quick connects make installation a breeze!
- Unlike permanent lighting, temporary lighting is installed on a job-site while working to ensure maximum illumination while working. The ability to keep the temporary fixture installed until after sheet rock is installed ensures maximum utility.
- Features: Quick & Easy Mounting
- Temporary Light Source
- 11 watts & 750 Lumens
- ETL Damp Location
- 25,000 Hr. Rated
- Doesn't impede sheet rock installation
- Standard Single-Gauge J-Box
- Product label: CONFORMS to STD. 1598
- CERTIFIED to CSA STD C22.2 No. 250.0
- Rating: 120VAC 60Hz 10.5W
- Model No: AXTD404-10.5W-40K-WH
- Made in China "ABI" LED2113

Model	Description
AXTD101	Temporary Vertical Disk, Jobsite Lighting

UL or ETL Listing	Damp Locations
Certifications	ETL
Dimensions	.4" Height x 2.126" Width x .394" Depth
Housing	Stamped Steel
Lens/Diffuser	UV Rated Polycarbonate
Voltage	AC 120v
Wattage	10.5w
Lumens	1,050lm
CRI	90

Kelvin	40K (30K available by special order)
Dimmable	10% on most dimmers
Operating Temp.	(-20° to -40°C) (25°C Nominal)
Mounting	Mounts to most 4" J boxes
Wattage	11W = 11 Watts
Kelvin/CCT	30K = 3000°K*; 40K = 4000°K (30K by special order only)
Finish	WH = White
Ordering example	AXTD101-11W-30K-WH

ETL Safety First Wet Location

LED LIGHTING

LED Outdoor

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.



LED Outdoor Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX3809-6W	9.8"W x 7.9"H x 8.9"Ext., 6 Watt Integrated LED

UL or ETL Listing	Damp Locations
Housing	Cold Rolled Steel • Baked Enamel
Lens/Diffuser	Matte White Acrylic
Voltage	AC 120v
Light Source	Integrated LED
Wattage	6w, 10W
Lumens	480, 600

CRI	>80
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White; BK = Black
Ordering example	AX3809-6W-30K-BK

ETL



LED Outdoor Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX3862-10W	7"W x 2.75"H x 3"Ext., 10 Watt Integrated LED

UL or ETL Listing	Damp Locations
Housing	Cold Rolled Steel • Baked Enamel
Lens/Diffuser	Matte White Acrylic
Voltage	AC 120v
Light Source	Integrated LED
Wattage	6w, 10W
Lumens	480, 600

CRI	>80
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White; BK = Black
Ordering example	AX3809-6W-30K-BK

ETL

ADA Compliant



LED Outdoor Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX3857-10W	4.53"W x 11.4"H x 2.8"Ext., 10 Watt Integrated LED, Glass Only: GL-AX3857
GL-AX3857	Glass Only

UL or ETL Listing	Damp Locations
Housing	Cold Rolled Steel • Baked Enamel
Lens/Diffuser	Matte White Acrylic
Voltage	AC 120v
Light Source	Integrated LED
Wattage	6w, 10W
Lumens	480, 600

CRI	>80
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White; BK = Black
Ordering example	AX3809-6W-30K-BK

ETL

ADA Compliant



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5514	Wattage: 20w (2× 10); Lumens: 1,600; # of Sockets: 2; Dimensions: 6"W x 14.28"H x 3.25"Ext.
GL-AX5514	Glass Only

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX5514
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	20W = 2× 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze
Ordering example	AX5514-20W-30K-ORB

UL

ADA Compliant

Wet Location



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5896	4.75"W x 9.625"H x 3.125"Ext., 10 Watt LED A19 Lamp
AX5897	4.75"W x 16"H x 3.5"Ext., 2x 10 Watt LED A19 Lamps

UL or ETL Listing	Damp Locations
Housing	Cold Rolled Steel • Baked Enamel
Lens/Diffuser	Matte White Acrylic
Voltage	AC 120v
Light Source	E26 Base LED A15 or T10 (Sold Separately)
Wattage	5.5w, 11w
Lumens	600, 1200
CRI	>80
Kelvin	30K, 40K

Mounting	Wall Mount. All necessary hardware included.
Suggested Lamp	LEDA210 • 27K • >80 CRI; LEDA214 • 41K • >80 CRI
Wattage	5.5W = 5.5 Watt LED A19 Lamp; 11W = 2x 5.5 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	GY = Grey; ORB = Oil Rubbed Bronze; WH = White; BK = Black
Ordering example	AX3857-5.5W-30K-BK

UL Wet Location



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX3540	Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 7.13"W x 16.25"H x 4"Ext.
GL-AX3540	Glass Only

UL or ETL Listing	Damp Locations
Housing	Aluminum
Lens	White Acrylic
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX3540
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze
Ordering example	AX3540-10W-30K-BN

UL ADA Compliant



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX3512	Wattage: 10w (1× 10); Lumens: 1,600; # of Sockets: 2; Dimensions: 8"W x 16"H x 6"Ext.
AX3513	Wattage: 20w (2× 10); Lumens: 1,600; # of Sockets: 2; Dimensions: 11.75"W x 13"H x 6.75"Ext.
AX3514	Wattage: 20w (2× 10); Lumens: 800; # of Sockets: 1; Dimensions: 5.5"W x 6.5"H x 5"Ext.
GL-AX3512	Glass Only
GL-AX3513	Glass Only
GL-AX3514	Glass Only

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel
Lens	Frosted Glass
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX3512 GL-AX3513 GL-AX3514
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp; 20W = 2× 10 watt LED A19
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze
Ordering example	AX3512-10W-30K-BN

UL Wet Location



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX3499	Wattage: 20w (2× 10); Lumens: 1,600; # of Sockets: 2; Dimensions: 10"W x 14"H x 6.25"Ext.
AX3500	Wattage: 20w (2× 10); Lumens: 1,600; # of Sockets: 2; Dimensions: 10"W x 18"H x 6.25"Ext.
AX3501	Wattage: 20w (2× 10); Lumens: 1,600; # of Sockets: 2; Dimensions: 10"W x 24"H x 6.25"Ext.
GL-AX3499	Glass Only
GL-AX3500	Glass Only
GL-AX3501	Glass Only

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel Baked on Enamel
Lens	White Acrylic Lens
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX3499 GL-AX3500 GL-AX3501 GL-AX3506 GL-AX3507
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	20W = 2× 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black
Ordering example	AX3500-20W-30K-BN

UL Wet Location



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX3506	Wattage: 20w (2× 10); Lumens: 1,600; # of Sockets: 2; Dimensions: 10"W x 18"H x 6.25"Ext.
AX3507	Wattage: 20w (2× 10); Lumens: 1,600; # of Sockets: 2; Dimensions: 10"W x 24"H x 6.25"Ext.
GL-AX3506	Glass Only
GL-AX3507	Glass Only

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel Baked on Enamel
Lens	White Acrylic Lens
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX3499 GL-AX3500 GL-AX3501 GL-AX3506 GL-AX3507
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	20W = 2× 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black
Ordering example	AX3500-20W-30K-BN

UL Wet Location



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX3515	Wattage: 20w (2× 10); Lumens: 1,600; # of Sockets: 2; Dimensions: 10"W x 14"H x 6.25"Ext.
AX3516	Wattage: 20w (2× 10); Lumens: 1,600; # of Sockets: 2; Dimensions: 10"W x 18"H x 6.25"Ext.
AX3517	Wattage: 20w (2× 10); Lumens: 1,600; # of Sockets: 2; Dimensions: 10"W x 24"H x 6.25"Ext.
GL-AX3515	Glass Only
GL-AX3516	Glass Only
GL-AX3517	Glass Only

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel Baked on Enamel
Lens	White Acrylic Lens
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX3508 GL-AX3509 GL-AX3510 GL-AX3515 GL-AX3516 GL-AX3517
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	20W = 2× 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black
Ordering example	AX3515-20W-30K-BN

UL

Wet Location



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX3508	Wattage: 20w (2× 10); Lumens: 1,600; # of Sockets: 2; Dimensions: 10"W x 14"H x 6.25"Ext.
AX3509	Wattage: 20w (2× 10); Lumens: 1,600; # of Sockets: 2; Dimensions: 10"W x 18"H x 6.25"Ext.
AX3510	Wattage: 20w (2× 10); Lumens: 1,600; # of Sockets: 2; Dimensions: 10"W x 24"H x 6.25"Ext.
GL-AX3508	Glass Only
GL-AX3509	Glass Only
GL-AX3510	Glass Only

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel Baked on Enamel
Lens	White Acrylic Lens
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX3508 GL-AX3509 GL-AX3510 GL-AX3515 GL-AX3516 GL-AX3517
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	20W = 2× 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black
Ordering example	AX3515-20W-30K-BN

UL

Wet Location



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5314	Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K; Dimensions: 10.25"W x 5.25"Ext.
GL-AX5314	Glass Only

UL or ETL Listing	Wet Locations
Housing	Die Cast Aluminum / Stamped Steel
Lens	White Frosted Lens
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX5314 GL-AX5316 GL-AX5317
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BK = Black
Ordering example	AX5314-10W-30K-BK

UL Wet Location Corrosion Resistant Coastal



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5316	Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K; Dimensions: 10.25"W x 5.25"Ext.
GL-AX5316	Glass Only

UL or ETL Listing	Wet Locations
Housing	Die Cast Aluminum / Stamped Steel
Lens	White Frosted Lens
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX5314 GL-AX5316 GL-AX5317
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BK = Black
Ordering example	AX5314-10W-30K-BK

UL Wet Location Corrosion Resistant Coastal



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5317	Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K; Dimensions: 10.25"W x 5.25"Ext.
GL-AX5317	Glass Only

UL or ETL Listing	Wet Locations
Housing	Die Cast Aluminum / Stamped Steel
Lens	White Frosted Lens
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX5314 GL-AX5316 GL-AX5317
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BK = Black
Ordering example	AX5314-10W-30K-BK

[UL](#)
[Wet Location](#)
[Corrosion Resistant](#)
[Coastal](#)



Decorative Wall Mount (White Opal Glass)

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5942	White Opal Glass; Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 5.5"W x 10"H x 6.5"Ext.
GL-AX5942	Glass Only

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel • Baked Enamel
Lens/Diffuser	White Opal / Frosted Seeded Glass
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX5560 GL-AX5942 GL-AX5664
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black
Ordering example	AX5560-BK-10W-30K

[UL](#)
[Wet Location](#)



Decorative Wall Mount (White Opal Glass)

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5560	White Opal Glass; Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 7.875"W x 12.25"H x 9.125"Ext.
GL-AX5560	Glass Only

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel • Baked Enamel
Lens/Diffuser	White Opal / Frosted Seeded Glass
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX5560 GL-AX5942 GL-AX5664
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black
Ordering example	AX5560-BK-10W-30K

UL Wet Location



Decorative Wall Mount (Frosted Seeded Glass)

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5664	Frosted Seeded Glass; Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 6.25"W x 10.5"H x 7"Ext.
GL-AX5664	Glass Only

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel • Baked Enamel
Lens/Diffuser	White Opal / Frosted Seeded Glass
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX5560 GL-AX5942 GL-AX5664
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black
Ordering example	AX5560-BK-10W-30K

UL Wet Location



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5964	Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 5.375"W x 9.5"H x 6.75"Ext.
GL-AX5964	Glass Only

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel • Baked Enamel
Lens/Diffuser	White Opal Glass
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K, 50K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX5726 GL-AX5964
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black
Ordering example	AX5726-10W-30K-BK

UL

Wet Location



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5726	Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 7"W x 12.5"H x 7.75"Ext.
GL-AX5726	Glass Only

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel • Baked Enamel
Lens/Diffuser	White Opal Glass
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K, 50K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX5726 GL-AX5964
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black
Ordering example	AX5726-10W-30K-BK

UL

Wet Location



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5956	Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 6.15"W x 10"H x 7.3"Ext.
AX5957	Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 8"W x 12.25"H x 9.5"Ext.
AX5958	Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 9"W x 14.5"H x 10.5"Ext.
GL-AX5956	Glass Only
GL-AX5957	Glass Only
GL-AX5958	Glass Only

UL or ETL Listing	Damp Locations
Housing	Cold Rolled Steel • Baked Enamel
Lens/Diffuser	White Opal Glass
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX5956 GL-AX5957 GL-AX5958 GL-AX5562
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White; BK = Black
Ordering example	AX5956-10W-30K-BK

UL



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5562	Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 8.5"W x 16.75"H x 10.75"Ext.
GL-AX5562	Glass Only

UL or ETL Listing	Damp Locations
Housing	Cold Rolled Steel • Baked Enamel
Lens/Diffuser	White Opal Glass
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX5956 GL-AX5957 GL-AX5958 GL-AX5562
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BN = Brushed Nickel; ORB = Oil Rubbed Bronze; WH = White; BK = Black
Ordering example	AX5956-10W-30K-BK

UL



Decorative Wall Mount (White Opal Glass)

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5234	White Opal Glass; Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 6"W x 7.25"H x 6"Ext.
GL-AX5234	Glass Only

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX5234 GL-AX5235 GL-AX5570
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black
Ordering example	AX5234-10W-30K-BK

UL Wet Location



Decorative Wall Mount (White Opal Glass)

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5235	White Opal Glass; Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 6"W x 7.25"H x 6"Ext.
GL-AX5235	Glass Only

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX5234 GL-AX5235 GL-AX5570
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black
Ordering example	AX5234-10W-30K-BK

UL Wet Location



Decorative Wall Mount (Clear Seeded Glass)

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5570	Clear Seeded Glass; Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 5"W x 11.25"H x 9.25"Ext.
GL-AX5570	Glass Only

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Glass Only	GL-AX5234 GL-AX5235 GL-AX5570
Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black
Ordering example	AX5234-10W-30K-BK

UL Wet Location



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5580	Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 7"W x 12.5"H x 7.75"Ext.

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel • Baked Enamel
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black; SI = Silver (AX5580); WB = Weathered Brass (AX5580)
Ordering example	AX5014-10W-30K-BK

UL Wet Location



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5014	Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 8.75"W x 12"H x 10.5"Ext.

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel • Baked Enamel
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black; SI = Silver (AX5580); WB = Weathered Brass (AX5580)
Ordering example	AX5014-10W-30K-BK

UL Wet Location



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5015	Wattage: 10; Lumens: 800; # of Sockets: 1; Dimensions: 8.75"W x 10.5"H x 10.5"Ext.

UL or ETL Listing	Wet Locations
Housing	Cold Rolled Steel • Baked Enamel
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black; SI = Silver (AX5580); WB = Weathered Brass (AX5580)
Ordering example	AX5014-10W-30K-BK

UL Wet Location



Decorative Wall Mount (Wall Mount, Up or Down Light)

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5586	Wall Mount, Up or Down Light; Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K; Dimensions: 4.375"W x 7"H x 4.25"Ext.

UL or ETL Listing	Wet Locations
Housing	Die Cast Aluminum
Lens	None
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K, 50K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp; 20W = 2 × 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; WH = White; BK = Black; SI = Silver
Ordering example	AX5586-10W-30K-BK

UL Wet Location



Decorative Wall Mount (Wall Mount, Up and Down Light)

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5584	Wall Mount, Up & Down Light; Wattage: 20w (2 × 10w); Lumens: 1,600lm; CRI: >80; Kelvin: 30K, 40K; Dimensions: 6"W x 15"H x 8.3"Ext.

UL or ETL Listing	Wet Locations
Housing	Die Cast Aluminum
Lens	None
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K, 50K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp; 20W = 2 × 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; WH = White; BK = Black; SI = Silver
Ordering example	AX5586-10W-30K-BK

UL Wet Location



Decorative Wall Mount (Ceiling Mount)

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5588	Ceiling Mount; Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K; Dimensions: 6"W x 9"H

UL or ETL Listing	Wet Locations
Housing	Die Cast Aluminum
Lens	None
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K, 50K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp; 20W = 2 × 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; WH = White; BK = Black; SI = Silver
Ordering example	AX5586-10W-30K-BK

UL Wet Location



Decorative Wall Mount (Wall Mount, Up or Down Light)

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5506	Wall Mount, Up or Down Light; Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K; Dimensions: 4.38"W x 7"H x 7.5"Ext.

UL or ETL Listing	Wet Locations
Housing	Die Cast Aluminum
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp; 20W = 2 × 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black
Options	AX5504 = Optional Baffle
Ordering example	AX5506-10W-30K-BK-AX5504

UL Wet Location



Decorative Wall Mount (Wall Mount, Up and Down Light)

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5508	Wall Mount, Up & Down Light; Wattage: 20w (2× 10w); Lumens: 1,600lm; CRI: >80; Kelvin: 30K, 40K; Dimensions: 4.25"W x 12"H x 7.375"Ext.

UL or ETL Listing	Wet Locations
Housing	Die Cast Aluminum
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp; 20W = 2× 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black
Options	AX5504 = Optional Baffle
Ordering example	AX5506-10W-30K-BK-AX5504

UL Wet Location



Decorative Wall Mount (Ceiling Mount)

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5516	Ceiling Mount; Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K; Dimensions: 4.75"W x 7"H x 7.5"Ext

UL or ETL Listing	Wet Locations
Housing	Die Cast Aluminum
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp; 20W = 2× 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	ORB = Oil Rubbed Bronze; BK = Black
Options	AX5504 = Optional Baffle
Ordering example	AX5506-10W-30K-BK-AX5504

UL Wet Location



Optional Baffle

AX5504

AX5504 = Optional Baffle (option for the AX5506, AX5508, AX5516 Decorative Wall Mount)



Commercial Up and Down Building Light

- Ideal for homes, courtyards, verandas, building walls, and hotels. Residential and commercial building applications. Up & down lights give your outdoor space a bright and modern look. The sleek style shines light upward and downward for atmospheric ambient light as well as useful illumination along walkways.
- See additional specs on pg. 86

Model	Description
AX5510-18W	(2× 9w); Wattage: 18w; Lumens: 1,620lm; Dimensions: 4.25"W x 11.8"H x 6.76"Ext.
AX5510-24W	(2× 12w); Wattage: 24w; Lumens: 2,160lm; Dimensions: 4.25"W x 11.8"H x 6.76"Ext.
AX5510-36W	(2× 18w); Wattage: 36w; Lumens: 3,240lm; Dimensions: 5.75"W x 11.8"H x 8.26"Ext.
AX5510-48W	(2× 9w24); Wattage: 48w; Lumens: 4,320lm; Dimensions: 6.3"W x 11.8"H x 8.81"Ext.
AX5510-60W	(2× 30w); Wattage: 60w; Lumens: 5,400lm; Dimensions: 6.3"W x 11.8"H x 8.81"Ext.

Commercial Up and/or Down Building Light

Power	A	B
2× 12W	4 ft.	20 ~ 27 ft.
2× 18W	6 ft.	27 ~ 33 ft.
2× 24W	6.5 ft.	43 ~ 50 ft.
2× 36W	8.3 ft.	55 ~ 60 ft.

A: The diameter of the aperture.

B: Height of building that can be illuminated by light.

UL or ETL Listing	Wet Locations (IP65)
Housing	Die Cast Aluminum
Lens	Glass
Voltage	AC 120v-277v
Light Source	Integrated LED
Light Color	WH, B, R, G, RGB
CRI	>80
Beam Angle	30°
PF	>0.9
Driver	Built-in

Mounting	Wall Mount, included all necessary hardware. Easy install metal plate 5" x 5".
Features	• Instant On/Off • Sealed fixture (bug free) • Available in multiple light colors
Wattage	18W = 2× 9 watt LED; 24W = 2× 12 watt LED; 36W = 2× 18 watt LED; 48W = 2× 24 watt LED; 60W = 2× 30 watt LED
Finish	BK = Black; BZ = Bronze
LED Color	WH = White; BL = Blue; RD = Red; GN = Green; RGB = Multi-Color
Ordering example	AX5510-18W-BK-WH

UL Wet Location Bug Free (sealed fixture)



Commercial Up or Down Building Light

- Ideal for homes, courtyards, verandas, building walls, and hotels. Residential and commercial building applications. Up & down lights give your outdoor space a bright and modern look. The sleek style shines light upward and downward for atmospheric ambient light as well as useful illumination along walkways.
- See additional specs on pg. 86

Model	Description
AX5512-9W	Wattage: 9w; Lumens: 810lm; Dimensions: 4.25"W x 7.87"H x 6.76"Ext.
AX5512-12W	Wattage: 12w; Lumens: 1,080lm; Dimensions: 4.25"W x 7.87"H x 6.76"Ext.
AX5512-18W	Wattage: 18w; Lumens: 1,620lm; Dimensions: 5.75"W x 7.87"H x 8.26"Ext.
AX5512-24W	Wattage: 24w; Lumens: 2,160lm; Dimensions: 6.3"W x 7.87"H x 8.81"Ext.
AX5512-30W	Wattage: 30w; Lumens: 2,700lm; Dimensions: 6.3"W x 7.87"H x 8.81"Ext.

Commercial Up and/or Down Building Light

Power	A	B
2× 12W	4 ft.	20 ~ 27 ft.
2× 18W	6 ft.	27 ~ 33 ft.
2× 24W	6.5 ft.	43 ~ 50 ft.
2× 36W	8.3 ft.	55 ~ 60 ft.

A: The diameter of the aperture.

B: Height of building that can be illuminated by light.

UL or ETL Listing	Wet Locations (IP65)	Mounting	Wall Mount, included all necessary hardware. Easy install metal plate 5" x 5".
Housing	Die Cast Aluminum	Features	• Instant On/Off • Sealed fixture (bug free) • Available in multiple light colors
Lens	Glass	Wattage	9W = 9 watt LED; 12W = 12 watt LED; 18W = 18 watt LED; 24W = 24 watt LED; 30W = 30 watt LED
Voltage	AC 120v-277v	Finish	BK = Black; BZ = Bronze
Light Source	Integrated LED	LED Color	WH = White; B = Blue; R = Red; G = Green; RGB = Multi-Color
Light Color	WH, B, R, G, RGB	Ordering example	AX5512-9W-BK-WH
CRI	>80		
Beam Angle	30°		
PF	>0.9		
Driver	Built-in		

UL Wet Location Bug Free (sealed fixture)



Elevator Light (Wall Mount)

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5961	Wall Mount; Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K; Dimensions: 6"W x 9"H x 9"Ext.

UL or ETL Listing	Wet Locations
Housing	Die Cast Aluminum
Lens	Clear Glass Jar
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount / Ceiling Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	SA = Satin Aluminum
Ordering example	AX5858-10W-30K-SA

UL Wet Location



Elevator Light (Ceiling Mount)

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5858	Ceiling Mount; Wattage: 10w; Lumens: 1,600lm; CRI: >80; Kelvin: 30K, 40K; Dimensions: 6"W x 15"H x 9"Ext.

UL or ETL Listing	Wet Locations
Housing	Die Cast Aluminum
Lens	Clear Glass Jar
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount / Ceiling Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	SA = Satin Aluminum
Ordering example	AX5858-10W-30K-SA

UL Wet Location



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5800	Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K, 50K; Dimensions: 10"W x 5.25"Ext.

UL or ETL Listing	Wet Locations
Housing	High Impact Polycarbonate
Lens	White Frosted Glass
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BK = Black; WH = White
Ordering example	AX5800-10W-30K-BK

UL Wet Location Corrosion Resistant Coastal



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5802	Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K, 50K; Dimensions: 10"W x 5.25"Ext.

UL or ETL Listing	Wet Locations
Housing	High Impact Polycarbonate
Lens	White Frosted Glass
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BK = Black; WH = White
Ordering example	AX5800-10W-30K-BK

UL Wet Location Corrosion Resistant Coastal



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5836	Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K, 50K; Dimensions: 6.5"W x 10"H x 5"Ext.

UL or ETL Listing	Wet Locations
Housing	High Impact Polycarbonate
Lens	White Frosted Glass
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BK = Black; WH = White
Ordering example	AX5800-10W-30K-BK

[UL](#)
[Wet Location](#)
[Corrosion Resistant](#)
[Coastal](#)



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5848	Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K, 50K; Dimensions: 6.5"W x 10"H x 5"Ext.

UL or ETL Listing	Wet Locations
Housing	High Impact Polycarbonate
Lens	White Frosted Glass
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BK = Black; WH = White
Ordering example	AX5800-10W-30K-BK

[UL](#)
[Wet Location](#)
[Corrosion Resistant](#)
[Coastal](#)



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5826	Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K, 50K; Dimensions: 6.5"W x 10"H x 5"Ext.

UL or ETL Listing	Wet Locations
Housing	High Impact Polycarbonate
Lens	White Frosted Glass
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BK = Black; WH = White
Ordering example	AX5800-10W-30K-BK

[UL](#)
[Wet Location](#)
[Corrosion Resistant](#)
[Coastal](#)



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5850	Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K; Dimensions: 10.25"W x 5.25"Ext.

UL or ETL Listing	Wet Locations
Housing	High Impact Polycarbonate
Lens	White Frosted Lens
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	WH = White; BK = Black
Ordering example	AX5800-10W-30K-BK

[UL](#)
[Wet Location](#)
[Corrosion Resistant](#)
[Coastal](#)



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5852	Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K; Dimensions: 10.25"W x 5.25"Ext.

UL or ETL Listing	Wet Locations
Housing	High Impact Polycarbonate
Lens	White Frosted Lens
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	WH = White; BK = Black
Ordering example	AX5800-10W-30K-BK

[UL](#)
[Wet Location](#)
[Corrosion Resistant](#)
[Coastal](#)



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5857	Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K; Dimensions: 11"W x 7.25"H x 3.38"Ext.

UL or ETL Listing	Wet Locations
Housing	High Impact Polycarbonate
Lens	Frosted Polycarbonate
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	WH = White; BK = Black
Ordering example	AX5855-10W-30K-BK

[UL](#)
[Wet Location](#)
[Corrosion Resistant](#)
[Coastal](#)
[ADA Compliant](#)



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model	Description
AX5855	Wattage: 10w; Lumens: 800lm; CRI: >80; Kelvin: 30K, 40K; Dimensions: 10.25"W x 5.75"H x 4.25"Ext.

UL or ETL Listing	Wet Locations
Housing	High Impact Polycarbonate
Lens	Frosted Polycarbonate
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K
Mounting	Wall Mount. All necessary hardware included.

Suggested Lamp	LEDA110 • 30K • >80 CRI; LEDA112 • 40K • >80 CRI
Wattage	10W = 10 Watt LED A19 Lamp
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	WH = White; BK = Black
Ordering example	AX5855-10W-30K-BK

[UL](#)
[Wet Location](#)
[Corrosion Resistant](#)
[Coastal](#)




Decorative Wall Mount

- Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.
- Photocell Included

Model data

Part	Wattage	Lumens	CRI	Dimensions
AX5020	9	650	>80	5.5"W x 8.5"H x 2.38"Ext.



UL or ETL Listing	Wet Locations
Energy Star	Yes
Housing	Aluminum
Lens	Opal Polycarbonate
Voltage	AC 120v
Light Source	9 watt Integrated LED
Kelvin	30K, 40K

Mounting	Wall Mount. All necessary hardware included.
Wattage	9W = 9 Watt Integrated LED
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BK = Black
Ordering example	AX5020-9W-30K-BK

[ADA Compliant](#)
[Energy Star](#)
[Wet Location](#)
[UL](#)




Decorative Wall Mount

- Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.
- Photocell Included

Model data

Part	Wattage	Lumens	CRI	Kelvin	Dimensions
AXLEDWP782	17w	1,700lm	80	30K, 40K	5.48"W x 8.384"H x 3.523"Ext.
AXLEDWP784	25w	2,200lm	80	30K, 40K	5.48"W x 8.384"H x 3.523"Ext.



UL or ETL Listing	Wet Locations (IP65)
Housing	Cold Rolled Steel Baked on Enamel
Lens	White Acrylic Lens
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Kelvin	30K, 40K

Mounting	Wall Mount. All necessary hardware included.
Wattage	17W = 17 Watt Integrated LED; 25W = 25 Watt Integrated LED
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	DB = Dark Bronze; WH = White
Ordering example	AXLEDWP782-17W-30K-DB

[Bug Resistant](#)
[Cold Weather](#)
[ADA Compliant](#)
[DLC](#)
[Wet Location](#)
[UL](#)



Decorative Wall Mount

Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.

Model data

Part	Wattage	Lumens	CRI	Kelvin	Dimensions
AX5911	20w (2× 10w)	1,600lm	>80	30K, 40K	5.5"W x 11"H x 4"Ext.
AX5912	20w (2× 10w)	1,600lm	>80	30K, 40K	5.5"W x 11"H x 4"Ext.
AX5951	20w (2× 10w)	1,600lm	>80	30K, 40K	5.5"W x 11"H x 4"Ext.
AX5959	20w (2× 10w)	1,600lm	>80	30K, 40K	5.5"W x 11"H x 4"Ext.



UL or ETL Listing	Wet Locations
Housing	Stamped Steel w/ Powder Coat
Lens	Polycarbonate
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Mounting	Ceiling or wall mount. Knock-outs on both ends for continuous runs. Includes all necessary hardware.

Features	Bug Resistant / Applied Bug Gasket; High Impact / Vandal Resistant; Interchangeable Lenses and Bodies
Suggested lamps	LEDA110 • 30K • >80 CRI / LEDA112 • 40K • >80 CRI
Wattage	20W = 2× 10 watt LED A19
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Finish	BK = Black; ORB = Oil Rubbed Bronze
Ordering example	AX5959-20W-30K-BK

[ADA Compliant](#)
[Bug Resistant](#)
[Wet Location](#)
[UL](#)



Carport Wall Mount

- Ideal for entrances, walkways, rear doors, patios, multifamily, or single-family homes as well as commercial building applications.
- Easy Installation

Model data

Part	Wattage	Lumens	CRI	Kelvin	Dimensions
AX5138	20w (2× 10w)	1,400lm	>80	30K, 40K	4.5"W x 10"H x 2.5"Ext.




UL or ETL Listing	Wet Locations
Housing	Stamped Steel w/ Powder Coat
Lens	Clear Polycarbonate
Voltage	AC 120v
Light Source	10 watt LED A19 E26 Bulb (Sold Separately)
Mounting	Ceiling or wall mount. Knock-outs on both ends for continuous runs. Includes all necessary hardware.

[ADA Compliant](#) [Wet Location](#) [UL](#)

Suggested lamps	LED010 • 30K • >80 CRI / LED012 • 40K • >80 CRI
Finish	WH = White; BK = Black
Wattage	20W = 2× 10 watt LED A19
Kelvin/CCT	30K - 3000°Kelvin; 40K - 4000°Kelvin
Options	PC = Photocell
Ordering example	AX5138-WH-20W-30K

LED Utility



LED Super-Slim Under Cabinet Puck Light

- Ideal for apartments, motels, and condos. Perfect for kitchens, utility rooms, closets, schools, garages, and offices.
- Available in packs of 1, 3, or 4 disk lights.

Model	Description
AXPKIT001	= 1 DC Adapter and 1 Power Supply. Dimmable and linkable up to 6 units.

Model data

Part	Wattage	Lumens	CRI	Dimensions
AXPK8001	3w (1× 3w Disk)	240lm	80	2.5"W x 0.25"H
AXPK8003	9w (3× 3w Disks)	720lm	80	2.5"W x 0.25"H
AXPK8004	12w (4× 3w Disks)	960lm	80	2.5"W x 0.25"H

UL or ETL Listing	ETL, Damp Locations
Dimensions	2.5"W x 0.25"H
Housing	Die Cast Aluminum
Lens/Diffuser	Polycarbonate
Voltage	DC 12v
Light Source	Integrated LED
Wattage	3w, 9w, 12w
Lumens	240, 700, 960
CRI	80

ETL Intertek

Kelvin	30K, 40K
Dimmable	0-10v
Mounting	Surface Mount. All necessary hardware included.
Wattage	3W = 3 watts; 9W = 9 watts; 12W = 12 watts
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin
Finish	WH = White; BK = Black
Ordering example	AXPK8001-3W-30K-BK



LED Color/Kelvin Selectable Under Cabinet Light

Self contained task light for under cabinets, work stations, over cabinet accent light, display cases and exhibits, merchandising, indirect accent, wall units, and bars.

Model data

Part	Wattage	Lumens	Kelvin	Length
AXUL8	4w	350lm	30K, 40K	8"
AXUL12	7.5w	560lm	30K, 40K	12"
AXUL18	6.5w	500lm	30K, 40K	18"
AXUL21	6.8w	600lm	30K, 40K	21"
AXUL24	7.8w	680lm	30K, 40K	24"
AXUL33	10.75w	850lm	30K, 40K	33"
AXUL42	13.45w	1150lm	30K, 40K	42"

UL or ETL Listing	CE, UL, cUL listed
Housing	Heavy Duty Steel
Lens/Diffuser	Injection molded white ribbed acrylic
Voltage	AC 120v
Light Source	Integrated LED
CRI	>80
Kelvin	Color/Kelvin Selectable Fixture 30k & 40k
Mounting	Hardwire connections for ceiling or wall. Suitable for non-insulated surfaces. Side and rear knock-outs. Linkable design for multiple units.

Features	Easy access on/off switch, side and rear knock-outs.
Ordering prefix	AXUL8-4W, AXUL12-7.5W, AXUL18-6.5W, AXUL21-6.8W, AXUL24-7.8W, AXUL33-10.75W, AXUL42-13.45W
Kelvin/CCT	CCT = Selectable CCT (30K, 40K)
Finish	WH = White
Ordering example	AXUL12-7.5W-CCT-WH

ETL Intertek



LED Strip Light

Ideal for apartments, motels, and condos. Perfect for kitchens, utility rooms, closets, schools, garages, and offices. General purpose lighting in retail stores and commercial environments.

Model	Description
AXWG-2	Optional Wire Guard, 2 Foot. AXWG-2 = Wire Guard for 2 ft.
AXWG-4	Optional Wire Guard, 4 Foot. AXWG-4 = Wire Guard for 4 ft.


Model data

Part	Wattage	Lumens	Kelvin	Dimensions
AXUL825	18W (2× 9W)	1,800lm	30K; 40K; 50K	4.75"W x 3.25"H x 24.25"L
AXUL826	36W (2× 18W)	3,600lm	30K; 40K; 50K	4.75"W x 3.25"H x 48"L

UL or ETL Listing	Wet Locations
Housing	Die formed heavy gauge steel
Voltage	120v-277v
Light Source	LED T8 tube (sold separately)
CRI	>80
Kelvin	30K, 40K, 50K
EM Back-up	90 Minutes minimum operation
Mounting	Units may be surface or pendant mounted, individually or in a continuous row. For continuous back-to-back socket mounting; insert combination end couplers into ends of adjoining units to act as a sleeve coupling and to permit use of housing as a continuous wireway.

ETL Intertek

Suggested lamps	LEDT800 • 30K • 80 CRI / LEDT802 • 40K • 80 CRI / LEDT803 • 50K • 80 CRI / LEDT801 • 30K • 80 CRI / LEDT804 • 40K • 80 CRI / LEDT805 • 50K • 80 CRI
Wattage	18W = 2× 9 watt LED T8 Tubes; 36W = 2× 18 watt LED T8 Tubes
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	WH = White
Options	EM = Emergency Back-up; AXWG-2 = Wire Guard for 2 ft.; AXWG-4 = Wire Guard for 4 ft.; MS = Microwave Sensor
Ordering example	AXUL825-18W-30K-WH-AXWG-2



LED Stairwell Light

Ideal for apartments, motels, and condos. Perfect for kitchens, utility rooms, closets, schools, garages, and offices.

Model data

Part	Wattage	Lumens	Kelvin	Dimensions
AXUL806	36W (2× 18W)	3,600lm	30K; 40K; 50K	4.75"W x 3.625"H x 46.5"L

UL or ETL Listing	Damp Locations
Housing	Heavy gauge cold rolled steel
Ends	Solid Steel End Caps / Wire Guard
Voltage	120v-277v
Light Source	2× 18W LED T8 Tubes
CRI	80
Kelvin	30K, 40K, 50K
Mounting	Surface or Suspension Mount.

ETL Intertek

Suggested lamps	LEDT801 • 30K • 80 CRI / LEDT804 • 40K • 80 CRI / LEDT805 • 50K • 80 CRI
Wattage	36W = 2× 18 watt LED T8 Tubes
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	WH = White
Options	EM = Emergency Back-up; MS = Microwave Sensor
Ordering example	AXUL806-36W-30K-WH-EM



LED Designer Strip

- Ideal for apartments, motels, and condos. Perfect for kitchens, utility rooms, closets, schools, garages, and offices.
- Easy Open Access
- Suitable for damp location

Model data

Part	Wattage	Lumens	CRI	Dimensions
AXUL810	20W	2,300lm	80	23.5"L x 2.375"W x 2.375"H
AXUL812	32W	3,680lm	80	45.875"L x 2.375"W x 2.375"H
AXUL814	60W	6,900lm	80	91.625"L x 2.375"W x 2.375"H



UL or ETL Listing	Damp Locations
Housing	Heavy gauge cold rolled steel
Lens/Diffuser	Extruded Opal Polycarbonate
Voltage	120v - 277v
Light Source	Integrated LED
CRI	80
Kelvin	Color/Kelvin Selectable Fixture 35K, 40K, 50K
EM Back-Up	90 minute minimum operation
Dimmable	0-10v

ETL Intertek

Mounting	Surface or Suspension Mount.
Wattage	20W = 20 watt Integrated LED; 32W = 32 watt Integrated LED; 60W = 60 watt Integrated LED
Kelvin/CCT	CCT = CCT Selectable (35K, 40K, 50K)
Finish	WH = White
Options	MS = Microwave Sensor; DMS Dimming Microwave Sensor; SB = Sensor Box; EM = 8W Emergency Back-up
Ordering example	AXUL810-20W-CCT-WH-MS



LED Economy Wrap

Ideal for apartments, motels, and condos. Perfect for kitchens, utility rooms, closets, schools, garages, and offices.


Model data

Part	Wattage	Lumens	CRI	Dimensions
AXUL804	25W	3,000lm	80	4.75"W x 2"H x 23.5"L
AXUL805	40W	4,800lm	80	4.75"W x 2"H x 46.5"L

UL or ETL Listing	ETL - Damp Locations
Housing	Heavy gauge cold rolled steel
Ends	Robust End Caps
Lens/Diffuser	Extruded Opal Polycarbonate
Voltage	120v - 277v
Light Source	Integrated LED
CRI	80
Kelvin	30K, 35K, 40K

ETL Intertek

Dimmable	0-10v
Mounting	Surface or Suspension Mount.
Wattage	25W = 25 watt Integrated LED; 40W = 40 watt Integrated LED
Kelvin/CCT	30K = 3000°Kelvin; 35K = 3500°Kelvin; 40K = 4000°Kelvin
Finish	WH = White
Ordering example	AXUL804-25W-30K-WH



Builder Model Wrap

Ideal for apartments, motels, and condos. Perfect for kitchens, utility rooms, closets, schools, garages, and offices.

Model data

Part	Wattage	Lumens	Kelvin	Dimensions
AXUL800	36W (2× 18W)	3,600lm	30K, 40K, 50K	7.25"W x 2.75"H x 46.5"L
AXUL801	72W (4× 18W)	7,200lm	30K, 40K, 50K	13"W x 2.75"H x 48"L

UL or ETL Listing	ETL - Damp Locations
Housing	Heavy gauge cold rolled steel
Ends	Injection solid polycarbonate end caps
Lens/Diffuser	Frosted Prismatic Acrylic
Voltage	120v
Light Source	LED T8 (sold separately)
CRI	80
Kelvin	30K, 40K, 50K
EM Back-up	90 Minutes minimum operation
Mounting	Surface or Suspension Mount.

ETL Intertek

Suggested lamps	LEDT801 • 30K • 80 CRI / LEDT804 • 40K • 80 CRI / LEDT805 • 50K • 80 CRI
Wattage	36W = 2× 18 watt LED T8 Tubes; 72W = 4× 18 watt LED T8 Tubes
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	WH = White
Options	EM = Emergency Back-up; MS = Microwave Sensor
Ordering example	AXUL800-36W-CCT-WH-EM




LED Stairwell Light

- Versatile utility LED light. Ideal for stairwells, hallways, corridors, closets, and pathways.
- Surface Mount Utility Light
- Selectable Light Color Temperature
- Motion Sensor
- Emergency Battery Back-up

Model data


Part	Wattage	Lumens	EM Lumens	Kelvin	Dimensions
AXUL848	48W	(30K) 5,500lm	(30K) 1,650lm	30K;	7"W x 3.13"H x 47.75"L
		(40K) 5,800lm	(40K) 1,740lm	40K;	
		(50K) 5,600lm	(50K) 1,680lm	50K	



UL or ETL Listing	Damp Locations
Housing	Injection Solid Polycarbonate
Lens/Diffuser	Opal Polycarbonate
Voltage	120v-277v
Light Source	Integrated LED
CRI	>80
Kelvin	Selectable CCT (30K, 40K, 50K)
Dimming	0-10V
EM Back-up	90 Minutes minimum operation

ETL Intertek

Features	Motion Sensor (included), EM Battery Back-up (optional)
Mounting	Surface or Suspension Mount.
Wattage	48W = 48 watt Integrated LED
Kelvin/CCT	CCT = Selectable CCT (30K, 40K, 50K)
Finish	WH = White
Options	EM = Emergency Back-up
Ordering example	AXUL848-48W-CCT-WH-EM



LED Puff Linear

Ideal for apartments, motels, and condos. Perfect for kitchens, utility, closets, schools, garages, and offices. You see the light, not the fixture.

Model data

Part	Wattage	Lumens	CRI	Dimensions
AXUL820	36W (2× 18W)	3,000lm	80	4.75"W x 2"H x 23.5"L

UL or ETL Listing	Damp Locations
Housing	Die formed heavy gauge steel
Ends	Design embossed ends are locked and secured to the housing
Lens/Diffuser	Dur-illume 2200™ Co-polyester. Indestructible lens.
Voltage	120v - 277v
Light Source	2x LED T8 Tube (sold separately)
CRI	>80
Kelvin	30K, 40K, 50K
EM Back-up	90 minute minimum operation

Mounting	Ceiling. Suitable for individual or continuous run installations. May be surface mounted or suspended on stems/rods.
Suggested lamps	LEDT801 • 30K • 80 CRI / LEDT804 • 40K • 80 CRI / LEDT805 • 50K • 80 CRI
Wattage	36W = 2× 18W LED T8 Tubes
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	WH = White
Options	EM = Emergency Back-up
Ordering example	AXUL820-36W-30K-WH-EM

ETL Intertek



LED Stairwell Light

Versatile utility LED light. Ideal for stairwells, hallways, corridors, closets, and pathways.

Model data

Part	Wattage	Lumens	Kelvin	Dimensions
AXUL844	15W	2,025lm	30K, 35K, 40K, 50K	4"W x 3.25"H x 24.25"L
AXUL846	32W	4,320lm	30K, 35K, 40K, 50K	4"W x 3.25"H x 48"L

UL or ETL Listing	Damp Locations
Housing	Robust aluminum housing and gear tray
Ends	Injection Solid Polycarbonate
Lens/Diffuser	Opal Polycarbonate
Voltage	120v-277v
Light Source	Integrated LED
CRI	80
Kelvin	30K, 35K, 40K, 50K
EM Back-up	8W • 90 Minutes minimum operation

ETL Intertek

Mounting	Surface or Suspension Mount.
Wattage	15W = 15 watt Integrated LED; 32W = 32 watt Integrated LED
Kelvin/CCT	30K = 3000°Kelvin; 35K = 3500°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	WH = White
Options	MS = Microwave Sensor; DMS Dimming Microwave Sensor; EM = Emergency Back-up
Ordering example	AXUL846-32W-30K-WH-MS




LED Enclosed and Gasketed, Vapor-Tight Utility Light

- Ideal for apartments, motels, and condos. Perfect for kitchens, utility, closets, schools, garages, and offices.
- Standard Latches

Model data

Part	Wattage	Lumens	CRI	Dimensions
AXUL839	20W	2,200lm	80	6"W x 4.25"H x 25"L
AXUL840	42W	4,400lm	80	6"W x 4.25"H x 49.25"L



UL or ETL Listing	Wet Locations
Housing	Weather resistant & corrosion free polycarbonate
Lens/Diffuser	Diffuser clamps to housing with 6 trouble free molded latches
Voltage	120v - 277v
Light Source	Integrated LED
CRI	80
Kelvin	30K, 40K
Dimmable	0-10v

Corrosion Resistant	Bug Resistant	Wet Location	ETL Intertek
---------------------	---------------	--------------	--------------

Mounting	Surface Mount. All necessary hardware included.
Wattage	20W = 20 watt Integrated LED; 42W = 42 watt Integrated LED
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin
Finish	WH = White
Options	MS = Microwave Sensor; DMS Dimming Microwave Sensor; EM = Emergency Back-up
Ordering example	AXUL840-42W-30K-WH-EM



LED Enclosed and Gasketed, Vapor-Tight Utility Light

Ideal for parking garages, cold storage facilities, food processing facilities, dusty or wet environments, stairwells, indoor equestrian facilities, canopies, and workshops.

Model data

Part	Wattage	EM Wattage	Lumens	EM Lumens	Dimensions
AXUL838	25W; 40W	10W; 16W	3,250lm; 5,200lm	1,300lm; 2,080lm	6.75"W x 3.88"H x 26.88"L
AXUL842	40W; 60W; 75W	16W; 24W; 30W	5,200lm; 7,072lm; 9,750lm	5,200lm; 2,828lm; 3,900lm	6.75"W x 3.88"H x 50.75"L



UL or ETL Listing	CE, UL. cUL listed
Listing	Wet Locations (IP65)
Housing	Weather resistant & corrosion free polycarbonate
Lens/Diffuser	
Voltage	120v - 277v
Light Source	Integrated LED
CRI	>80
Kelvin	Selectable CCT (30K, 40K, 50K)
Dimmable	0-10v
Ambient Temp.	Suitable for 30°C temperatures.

Mounting	Surface or Suspended Mount.
Wattage	25W = 25 watt Integrated LED; 40W= 40 watt Integrated LED; 60W = 60 watt Integrated LED; 75W = 75 watt integrated LED
Kelvin/CCT	CCT = Selectable CCT (30K, 40K, 50K)
Finish	WH = White
Options	MS = Microwave Sensor; DMS Dimming Microwave Sensor; EM = Emergency Back-up

Ordering example **AXUL12-7.5W-30K-WH-MS**

Corrosion Resistant

Bug Resistant

Wet Location

UL



LED Bed Light

- The bed light's design and functionality fits the needs of both patient rooms and assisted living environments. The smooth shape reduces its visual impact on the wall while simplifying the cleaning routine.
- Four position, 3 circuit pull switch (on up, on down, on both, all off) are standard and located toward the right side.
- LED nightlight and on/off pull switch is included.

Model data

Part	Wattage	Lumens	Kelvin	Dimensions
AXUL860	72W (4× 18W)	7,200lm	30K; 40K; 50K	8.125"W x 5.25"H x 48.6"L



UL or ETL Listing	Damp Locations
Housing	Baked white enamel on all metal parts
Voltage	120v-277v
Light Source	4x LED T8 tubes (sold separately)
CRI	>80
Kelvin	30K, 40K, 50K
Mounting	Horizontal wall mount only. Power connections can be made in the fixture wiring channel or in a standard J box (not included)

ETL Intertek

Suggested lamps	LEDT801 • 30K • 80 CRI / LEDT804 • 40K • 80 CRI / LEDT805 • 50K • 80 CRI
Wattage	72W = 4× 18 watt LED T8 Tubes
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	WH = White
Options	PC = Pull Chain
Ordering example	AXUL860-72W-30K-WH-PC



Architectural LED Linear

Architectural linear LED suspension lighting fixtures bring clean lines and clear light to storage rooms, offices, conference rooms, retail reception areas, hallways, and education facilities.

Model data

Part	Wattage	Lumens	Kelvin	CRI	Dimensions
AXLL104-25W	25W	2,500lm	30K, 40K, 50K; CCT Selectable	>80	3.375"H x 2.75"W x 47.5" L
AXLL104-40W	40W	8,000lm	30K, 40K, 50K; CCT Selectable	>80	3.375"H x 2.75"W x 47.5" L
AXLL106-60W	60W	10,900lm	30K, 40K, 50K; CCT Selectable	>80	3.375"H x 2.75"W x 70.75" L

UL or ETL Listing	Damp Locations
Voltage	120v-277v
Light Source	Integrated LED
CRI	>80
Kelvin	30K, 40K, 50K - CCT Selectable
Dimmable	0-10v
Mounting	Recess mounted. Housing rests on T-Bars with suspension holes available for chain mounting applications
Ordering prefix	AXLL104, AXLL106

Wattage	25W = 25 watt; 40W = 40 watt; 60W = 60 watt
Kelvin/CCT	CCT = Selectable CCT
Finish	WH = White
Mounting	SM = Surface Mount; SC = Suspension Cable; WM = Wall Mount; RMK = Recessed Mount Kit
Light Direction	UP = Up; DN = Down; UD = Up/Down
Options	EM = Emergency Back-up
Ordering example	AXLL104-25W-CCT-WH-SM-DN-EM





LED Recessed Troffer

Office areas, classrooms, retail stores, and hospitals. Economy grade, recessed, lay-in T-Bar luminaire with framed door. For use in applications where low cost, high quality and ease of installation are required. Shallow design accommodates mounting into low ceiling plenums.

Model data

Part	Wattage	Lumens	Kelvin	Dimensions
AXUL854	25W	3,125lm	30K; 40K; 50K	23.82"W x 23.62"L x 3.15"H
AXUL855	40W	5,000lm	30K; 40K; 50K	47.64"W x 23.62"L x 2"H
AXUL856	40W	5,000lm	30K; 40K; 50K	23.82"W x 23.62"L x 3.15"H
AXUL857	50W	6,250lm	30K; 40K; 50K	47.64"W x 23.62"L x 2"H

UL or ETL Listing	Damp Locations
Housing	Heavy gauge steel with powder coat finish.
Voltage	120v-277v
Light Source	Integrated LED
CRI	80
Kelvin	30K, 40K, 50K
Dimmable	0-10v

Mounting	Recess mounted. Housing rests on T-Bars with suspension holes available for chain mounting applications
Wattage	25W = 25 watt Integrated LED; 40W = 40 watt Integrated LED; 50W = 50 watt Integrated LED
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	WH = White
Ordering example	AXUL854-25W-30K-WH

ETL Intertek



LED Linear High Bay

Compact and economical luminaire utilizing the latest in LED technology. Exceptional lighting in low to high ceiling applications delivering the best luminous performance to warehouse, manufacturing, distribution, industrial, and commercial applications.

Model data

Part	Wattage	Lumens	Kelvin	Dimensions
AXUL724-200W	200W	25,000lm	30K, 35K; 40K, 50K	3.375"H x 2.75"W x 47.5" L

UL or ETL Listing	Damp Locations
Housing	Cold Rolled Steel
Voltage	120v-277v
Light Source	Integrated LED
CRI	>80
Kelvin	30K, 35K, 40K, 50K
Dimmable	0-10v

Mounting	Surface or Suspension Chain mounted
Ordering prefix	AXUL724
Wattage	200W = 200 watt Integrated LED
Kelvin/CCT	30K = 3000°Kelvin; 35K = 3500°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	WH = White
Ordering example	AXUL724-200W-30K-WH

UL



Decorative LED Ring Light

The doughnut ring light has a unique ring style with an LED light source illuminating its full light distribution. The fixture comes in several circle diameter sizes.

Model data

Part	Wattage	Lumens	Kelvin	CRI	Dimensions
AXLL175-25W	25W	1,750lm	30K, 40K, 50K	>80	2.36"H x 15.7"W
AXLL175-36W	36W	2,520lm	30K, 40K, 50K	>80	2.36"H x 23.6"W
AXLL175-60W	60W	4,200lm	30K, 40K, 50K	>80	2.36"H x 35.4"W
AXLL175-80W	80W	5,600lm	30K, 40K, 50K	>80	2.36"H x 47.2"W
AXLL175-100W	100W	7,000lm	30K, 40K, 50K	>80	2.36"H x 59"W
AXLL175-120W	120W	8,400lm	30K, 40K, 50K	>80	2.36"H x 70.9"W

UL or ETL Listing	Damp Locations
Voltage	120v-277v
Light Source	Integrated LED
CRI	>80
Kelvin	30K, 40K, 50K
Dimmable	0-10v
Mounting	Pendant or surface mounted.
Ordering prefix	AXLL175

Wattage	25W = 25 watt; 36W = 36 watt; 60W = 60 watt; 80W = 80 watt; 100W = 100 watt; 120W = 120 watt
Kelvin/CCT	30K = 3000°K; 40K = 4000°K; 50K = 5000°K
Finish	WH = White
Mounting	PM = Pendant Mount; SM = Surface Mount
Ordering example	AXLL175-25W-30K-WH-PM

ETL Intertek



Architectural LED Moon Light

Moon Light with classic shape and proportions, widely used for general lighting applications.


Model data

Part	Wattage	Lumens	Kelvin	CRI	Dimensions
AXLL112-50W	50W	2,550lm	30K, 40K, 50K	>80	3.1"H x 18.9"W
AXLL112-80W	80W	4,250lm	30K, 40K, 50K	>80	3.1"H x 23.6"W
AXLL112-120W	120W	6,120lm	30K, 40K, 50K	>80	3.1"H x 35.4"W
AXLL112-220W	220W	11,220lm	30K, 40K, 50K	>80	3.1"H x 47.2"W

UL or ETL Listing	Damp Locations
Voltage	120v-277v
Light Source	Integrated LED
CRI	>80
Kelvin	30K, 35K, 40K, 50K
Dimmable	0-10v
Mounting	Pendant or surface mounted.
Ordering prefix	AXUL112

Wattage	50W = 50 watt Integrated LED; 80W = 80 watt Integrated LED; 120W = 120 watt Integrated LED; 220W = 220 watt integrated LED
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	WH = White; BK = Black; SI = Silver
Mounting	PM = Pendant Mount; SM = Surface Mount
Ordering example	AXUL112-50W-30K-WH

ETL Intertek



Decorative LED Ring Light

- The doughnut ring light has a unique ring style light with an LED light source illuminating its full light distribution. It is available in several sizes and diffuser colors.
- Optional acoustic felt for sound dampening in offices and large open spaces. Available in 34 unique colors upon request.

Model data

Part	Wattage	Lumens	Kelvin	CRI	Dimensions
AXLL201-15W	15W	1050lm	30K, 40K, 50K	>80	3.5"H x 14.2"W
AXLL201-25W	25W	1750lm	30K, 40K, 50K	>80	3.5"H x 17.7"W
AXLL201-36W	36W	2520lm	30K, 40K, 50K	>80	3.5"H x 23.6"W
AXLL201-50W	50W	3500lm	30K, 40K, 50K	>80	3.5"H x 31.5"W

UL or ETL Listing	Damp Locations
Voltage	120v-277v
Light Source	Integrated LED
CRI	>80
Kelvin	30K, 40K, 50K
Dimmable	0-10v
Mounting	Pendant or surface mounted.
Ordering prefix	AXLL201
Wattage	15W = 15 watt; 25W = 25 watt; 36W = 36 watt; 50W = 50 watt

Kelvin/CCT	30K = 3000°K; 40K = 4000°K; 50K = 5000°K
Finish	WH = White; BK = Black; SI = Silver
Mounting	PM = Pendant Mount; SM = Surface Mount
Options	AF = Acoustic Felt
Acoustic Felt Color (AF, from color chart)	001; 002; 003; 004; 005; 006; 007; 008; 009; 011; 012; 013; 014; 016; 017; 018; 019; 020; 021; 022; 024; 025; 028; 029; 031; 033; 034; 035; 036; 038; 040; 042; 043; 044
Ordering example	AXLL201-25W-30K-WH-PM-AF008

ETL Intertek



Architectural LED Moon Light

- Moon Light with a classic shape and proportions, widely used for general lighting applications.
- Optional acoustic felt for sound dampening in offices and large open spaces. Available in 34 unique colors upon request.

Model data

Part	Wattage	Lumens	Kelvin	CRI	Dimensions
AXLL202-15W	15W	1050lm	30K, 40K, 50K	>80	3.5"H x 14.2"W
AXLL202-25W	25W	1750lm	30K, 40K, 50K	>80	3.5"H x 17.7"W
AXLL202-36W	36W	2520lm	30K, 40K, 50K	>80	3.5"H x 23.6"W
AXLL202-50W	50W	3500lm	30K, 40K, 50K	>80	3.5"H x 31.5"W

UL or ETL Listing	Damp Locations
Voltage	120v-277v
Light Source	Integrated LED
CRI	>80
Kelvin	30K, 35K, 40K, 50K
Dimmable	0-10v
Mounting	Pendant or surface mounted.
Ordering prefix	AXLL202
Wattage	15W = 15 watt; 25W = 25 watt; 36W = 36 watt; 50W = 50 watt

Kelvin/CCT	30K = 3000°K; 40K = 4000°K; 50K = 5000°K
Finish	WH = White; BK = Black; SI = Silver
Mounting	PM = Pendant Mount; SM = Surface Mount
Options	AF = Acoustic Felt
Acoustic Felt Color (AF, from color chart)	001; 002; 003; 004; 005; 006; 007; 008; 009; 011; 012; 013; 014; 016; 017; 018; 019; 020; 021; 022; 024; 025; 028; 029; 031; 033; 034; 035; 036; 038; 040; 042; 043; 044

Ordering example	AXLL202-25W-30K-WH-PM-AF008
-------------------------	------------------------------------

ETL Intertek

LED Area Lights



Medium/Large Wall Pack

Ideal for entrances, parking areas, building perimeter, walkways, underpasses, loading docks, recreation areas, and more.

Model data

Part	Wattage	Lumens	Kelvin	CRI	Dimensions
AXWP916-45W	45w	5,200lm	50K	>75	9.2"H x 14.2"W x 7.4" Ext.
AXWP916-70W	70w	8,000lm	50K	>75	9.2"H x 14.2"W x 7.4" Ext.
AXWP935-90W	90w	10,900lm	50K	80	9.75"H x 18"W x 8.75" Ext.
AXWP935-135W	135w	15,600lm	50K	80	9.75"H x 18"W x 8.75" Ext.

UL or ETL Listing	Wet Locations (IP65). Approved UL1598
DLC	4.1 listed. DLC Premium
Housing	Heavy Duty Die Cast Aluminum
Photo-control	Optional, easy field install
Lens/Diffuser	Tempered glass diffuser. Dust-proof, insect, heat, and impact resistant
Voltage	120v-277v
Light Source	Integrated LED Type III
CRI	>Ra-75+
Kelvin	30K, 40K, 50K
Ambient Temp.	Suitable for 40° temperatures

Cold Weather	Cold weather starting -40°C to +54°C (-40°F to +130°F)
EM Back-Up	90 minutes minimum operation
Mounting	Mounts directly to standard 4" J box or directly to wall
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	DB = Dark Bronze
Options	AT120 = Photocontrol (120-277vac); EM = Emergency Back-up
Ordering example	AXWP916-45W-50KDB--AT120

[Wet Location](#)
[Cold Weather](#)
[Bug Resistant](#)
[DLC](#)
[UL](#)



LED Slim Wall Pack

Ideal for apartments, motels, and condos. Perfect for kitchens, utility, closets, schools, garages, and offices.

Model data

Part	Wattage	Lumens	CRI	Dimensions
AXWP940-15W	15W	1,000lm	>75	7.75"H x 6.5"W x 4.25" Ext.
AXWP940-20W	20W	2,000lm	>75	7.75"H x 6.5"W x 4.25" Ext.
AXWP940-30W	30W	3,000lm	>75	7.75"H x 6.5"W x 4.25" Ext.
AXWP940-40W	40W	4,500lm	>75	7.75"H x 6.5"W x 4.25" Ext.
AXWP942-70W	70W	7,500lm	>75	9.5"H x 11.25"W x 5.75" Ext.
AXWP942-90W	90W	9,700lm	>75	9.5"H x 11.25"W x 5.75" Ext.

UL or ETL Listing	Wet Locations
Housing	Weather resistant & corrosion free polycarbonate
Lens/Diffuser	Diffuser clamps to housing with 6 trouble free molded latches
Voltage	120v - 277v
Light Source	Integrated LED
CRI	80
Kelvin	30K, 40K, 50K

Dimmable	0-10v
Mounting	Surface Mount. All necessary hardware included.
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	DB = Dark Bronze
Options	AT120 = Photocontrol (120-277vac)
Ordering example	AXWP940-20W-50K-DB-AT120

- Dark Sky
- Cold Weather
- Bug Resistant
- Wet Location
- UL



LED Dark Sky Wall Pack

Ideal for parking garages, cold storage facilities, food processing facilities, dusty or wet environments, stairwells, indoor equestrian facilities, canopies, and workshops.

Model data

Part	Wattage	Lumens	CRI	Dimensions
AXWP918-45W	45W	4,900lm	75+	14"W x 5"H x 8.2"Ext.
AXWP918-70W	70W	7,350lm	75+	14"W x 5"H x 8.2"Ext.
AXWP918-90W	90W	9,500lm	75+	14"W x 5"H x 8.2"Ext.
AXWP918-135W	135W	14,000lm	75+	14"W x 5"H x 8.2"Ext.

UL or ETL Listing	Suitable for Wet Locations. IP65 optics and housing. Approved UL1598
DLC	4.1 listed. DLC Premium
Housing	Heavy duty die-cast aluminum
Lens/Diffuser	Tempered glass diffuser is dust-proof, insect, heat and impact resistant.
Driver Current	150mA
Voltage	120v - 277v
Power Factor	>0.95 / >0.89
Light Distribution	Type III
LED	Long Lasting 50,000 hr. rated
CRI	>Ra-75+
Kelvin	50K standard
Ambient Temp.	Suitable for 40°C temperatures.

Cold Weather	Cold Weather Starting -40°C / +54°C (-40°F to +130°F)
Mounting	Mounts to standard 4" J-Box or directly to the wall.
EM Back-up	Minimum 90 minutes. Field install.
Photocontrol	Sold Separately, Easy Field Install
Ordering prefix	AXWP918
Wattage	40W = 40 watt LED; 70W = 70 watt LED; 90W = 90 watt LED; 135W = 135 watt LED
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	DB = Dark Bronze
Options	AT120 = Photo-control; EM = Emergency Back-up
Ordering example	AXWP918-45W-50K-DB-AT120

[Dark Sky](#)
[Cold Weather](#)
[Bug Resistant](#)
[DLC](#)
[Wet Location](#)
[UL](#)

Flood Lights



LED Flood Light

- Ideal for building facade lighting, sports fields, landscape lighting, uplighting for signs/displays, and many other general applications where flood lighting may be useful.
- Knuckle Mount (included)
- EP902SMB Small Mounting Yoke
- PS Pole Slip-fitter

Model	Description
EP902SMB	Small Mounting Yoke (option). EP902SMB = Small Mounting Yoke

Model data

Part	Wattage	Lumens	CRI	Dimensions
AXFL900-35W	35W	3,600lm	70+	9.5"W x 11"H x 5.5"Ext.
AXFL900-45W	45W	5,600lm	70+	9.5"W x 11"H x 5.5"Ext.
AXFL900-65W	65W	7,100lm	70+	9.5"W x 11"H x 5.5"Ext.

UL or ETL Listing	Suitable for Wet Locations and Ground Mounting
DLC	Approved. UL1598, UL8750
Housing	Heavy duty die-cast aluminum
Lens/Diffuser	Tempered, impact-resistant glass
LED Chip	Cree CXA Series. LM 80 Certified.
Voltage	120v - 277v
Power Factor	>0.98
LED Driver	High Lumen Output
CRI	70+
Kelvin	50K standard
Ambient Temp.	Suitable for 40°C temperatures.

Cold Weather	Cold Weather Starting -40°C (-40°F)
Mounting	Mounts to standard 4" J-Box or directly to the wall.
EM Back-up	Minimum 90 minutes. Field install.
Photocontrol	Sold Separately, Easy Field Install
Ordering prefix	AXFL900
Wattage	35W; 45W; 65W
Kelvin/CCT	50K = 5000° Kelvin
Finish	DB = Dark Bronze
Options	AT120 = Photocontrol (120-277vac); EP902SMB = Small Mounting Yoke; PS = Pole Slip Fitter

Ordering example **AXFL900-45W-50K-DB-ASM**

Cold Weather

Bug Resistant

Wet Location

UL



LED Flood Light

- Ideal for building facade lighting, sports fields, landscape lighting, uplighting for signs/displays, and many other general applications where flood lighting may be useful.
- Knuckle Mount (included)
- EP902SMB Small Mounting Yoke
- PS Pole Slip-fitter

Model	Description
EP902SMB	Small Mounting Yoke (option). EP902SMB = Small Mounting Yoke

Model data

Part	Wattage	Lumens	CRI	Dimensions
AXFL930-70W	70W	8,900lm	70+	11"H x 13"W x 5.5" Ext.
AXFL930-90W	90W	11,000lm	70+	11"H x 13"W x 5.5" Ext.
AXFL930-110W	110W	12,500lm	70+	11"H x 13"W x 5.5" Ext.

UL or ETL Listing	Suitable for Wet Locations and Ground Mounting	Mounting	Mounts to standard 4" J-Box or directly to the wall.
DLC	Approved. UL1598, UL8750	Photocontrol	Sold Separately, Easy Field Install
Housing	Heavy duty die-cast aluminum	Ordering prefix	AXFL930
Lens/Diffuser	Tempered, impact-resistant glass	Wattage	70W = 70 watt Integrated LED; 90W = 90 watt Integrated LED; 110W = 110 watt Integrated LED
LED Chip	Cree CXA Series. LM 80 Certified.	Kelvin/CCT	50K = 5000°Kelvin
Voltage	120v - 277v	Finish	DB = Dark Bronze
Power Factor	>0.98	Options	AT120 = Photocontrol (120-277vac); EP902SMB = Small Mounting Yoke; PS = Pole Slip Fitter
LED Driver	High Lumen Output	Ordering example	AXFL930-70W-50K-DB-AT120
CRI	70+		
Kelvin	50K standard		
Ambient Temp.	Suitable for 40°C temperatures.		
Cold Weather	Cold Weather Starting -40°C (-40°F)		

Cold Weather

Bug Resistant

Wet Location

UL



LED Flood Light

- Ideal for building facade lighting, sports fields, landscape lighting, uplighting for signs/displays, and many other general applications where flood lighting may be useful.
- Knuckle Mount (included)
- EP902SMB Small Mounting Yoke
- PS Pole Slip-fitter

Model	Description
EP902SMB	Small Mounting Yoke (option). EP902SMB = Small Mounting Yoke

Model data

Part	Wattage	Lumens	CRI	Dimensions
AXFL750-45W	45W	4,950lm	80	4.33"H x 8.67"W x 5"Ext.
AXFL750-70W	70W	6,800lm	80	4.33"H x 8.67"W x 5"Ext.


UL or ETL Listing	Suitable for Wet Locations and Ground Mounting
DLC	Listed
Housing	Heavy duty die-cast aluminum
LED Chip	Phillips rated 50,000 hr.
Voltage	120v - 277v
LED Driver	High Lumen Output
Kelvin	50K standard
Ambient Temp.	Suitable for 40°C temperatures.
Cold Weather	Cold Weather Starting -40°C (-40°F)

Mounting	Knuckle, Trunnion, or Slip-fitter
Photocontrol	Sold Separately, Easy Field Install
Ordering prefix	AXFL750
Wattage	45W = 45 watt Integrated LED; 70W = 70 watt Integrated LED
Kelvin/CCT	50K = 5000° Kelvin
Finish	DB = Dark Bronze
Options	AT120 = Photocontrol (120-277vac); EP902SMB = Small Mounting Yoke; PS = Pole Slip Fitter

Ordering example **AXFL750-45W-50K-ASM**

[Dark Sky](#)
[Cold Weather](#)
[Bug Resistant](#)
[DLC](#)
[Wet Location](#)
[UL](#)

Canopy Lights



LED Gas Station Canopy

Ideal for gas stations and general lighting applications.

Model data

Part	Wattage	Lumens	CRI	Dimensions
AXLED600	100W	11,500lm	80	9.25"H x 19"W x 19"L
AXLED602	120W	14,000lm	80	9.25"H x 19"W x 19"L
AXLED604	150W	18,000lm	80	9.25"H x 19"W x 19"L
AXLED606	200W	23,000lm	80	9.25"H x 19"W x 19"L

UL or ETL Listing	Wet Locations
DLC	Approved. UL1598, UL8750
Housing	Powder coated die-cast aluminum
Lens/Diffuser	Impact resistant polycarbonate
LED Chip	Phillips Lumileds. High Efficiency
Voltage	120v - 277v
Power Factor	>0.98
CRI	80
Kelvin	50K standard
Cold Weather	Cold Weather Starting -40°C (-40°F)

Mounting	Pendant Mount
EM Back-up	Minimum 90 minutes. Field install.
Ordering prefix	AXLED600-100W, AXLED602-120W, AXLED604-150W, AXLED606-200W
Wattage	100W = 100 watt LED; 120W = 120 watt LED; 150W = 150 watt LED; 200W = 200 watt LED
Kelvin/CCT	50K = 5000°Kelvin
Finish	WH = White
Options	EM = Emergency Back-Up
Ordering example	AXLED600-100W-50K-WH-EM

Cold Weather

Bug Resistant

Wet Location

UL



LED Square Canopy

Ideal for security, entryways, perimeter lighting, exterior canopies, stairwells.

Model data

Part	Wattage	Lumens	CRI	Dimensions
AXLED510	45W	6,075lm	>70	3.3"H x 10.05"W x 10.05"L
AXLED512	65W	8,775lm	>70	3.3"H x 10.05"W x 10.05"L

UL or ETL Listing	Approved for wet locations, IP54 not intended for use in environments with direct exposure to high pressure water, such as car washes.	CRI	>70
DLC	Approved. Wet Location IP65	Kelvin	40K, 50K
Housing	Powder coated die-cast aluminum	Mounting	Surface Mount (10-20 ft.)
Lens/Diffuser	Polycarbonate	Spacing	4 times mounting height.
LED Chip	Lumileds, LED High Efficiency	Wattage	45W = 45 watt LED; 65W = 65 watt LED
Voltage	120v - 277v	Kelvin/CCT	40K = 4000°Kelvin; 50K = 5000°Kelvin
Power Factor	>0.95	Finish	WH = White; DB = Dark Bronze
		Options	MS = Motion Sensor
		Ordering example	AXLED510-45W-50K-DB-MS

Cold Weather

Bug Resistant

UL

LED LIGHTING

Garden Bollards

Features: LED technology is ideal for commercial and retail lighting applications because of the many color choices, long life operation, and that LEDs do not emit any harmful UV rays that can fade artwork or fabrics. LEDs offer sparkle to applications with true crisp color temperature ranges to meet any architectural and design needs.

Exceptional Energy Savings

Reduced Maintenance and Labor Costs

Improved Quality of Lighting

Enclosed Tops Prevent Debris and Moisture from Accumulating Within the Garden Bollard

All Cast Aluminum Construction

"Green" Product



LED Garden Bollard

Auto dealerships, multi-family parking lots, assisted living, educational and business campuses, parks & recreation facilities, security areas, malls, and retail stores.

Model	Description
AXGB100	Wattage: 15W / 25W; Kelvin/CCT: 30K / 40K; Dimensions: 39.5"H x 8.875"W; Special Functions: EM = Emergency Back-up (overview table)

UL or ETL Listing	Wet Locations IP65
Housing	Die cast aluminum, powder coated
Lens/Diffuser	Polycarbonate
Energy Star	Qualified
Lighting Facts	Listed
Voltage	100v/277v
Kelvin	30K, 40K
Mounting	Flush Mount. (3) 4" anchor bolts included.

Dimensions	39.5"H x 9"W
Wattage	15W; 25W
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin
Finish	BK = Black (standard); BZ = Bronze; GRY = Grey; WH = White
Options	EM = Emergency Back-up
Ordering example	AXGB100-25W-30K-BK

[Dark Sky](#)[Wet Location](#)[UL](#)

LED Garden Bollard

Auto dealerships, multi-family parking lots, assisted living, educational and business campuses, parks & recreation facilities, security areas, malls, and retail stores.

Model	Description
AXGB120	Wattage: 15W / 25W; Kelvin/CCT: 30K / 40K; Dimensions: 39.5"H x 9"W; Special Functions: EM = Emergency Back-up (overview table)

UL or ETL Listing	Wet Locations IP65
Housing	Die cast aluminum, powder coated
Lens/Diffuser	Polycarbonate
Energy Star	Qualified
Lighting Facts	Listed
Voltage	100v/277v
Kelvin	30K, 40K
Mounting	Flush Mount. (3) 4" anchor bolts included.

Dimensions	39.5"H x 8.875"W
Wattage	15W; 25W
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin
Finish	BK = Black (standard); BZ = Bronze; GRY = Grey; WH = White
Options	EM = Emergency Back-up
Ordering example	AXGB120-25W-30K-BK

[Dark Sky](#)[Wet Location](#)[UL](#)



LED Garden Bollard

Auto dealerships, multi-family parking lots, assisted living, educational and business campuses, parks & recreation facilities, security areas, malls, and retail stores.

Model	Description
AXGB122	Wattage: 15W; Kelvin/CCT: 30K / 40K; Dimensions: 39.5"H x 9"W (overview table)


UL or ETL Listing	Wet Locations IP65
Housing	Die cast aluminum, powder coated
Lens/Diffuser	Polycarbonate
Energy Star	Qualified
Lighting Facts	Listed
Voltage	100v/277v
Kelvin	30K, 40K

Mounting	Flush Mount. (3) 4" anchor bolts included.
Dimensions	39.5"H x 5"W
Wattage	15W
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin
Finish	BK = Black (standard); BZ = Bronze; GRY = Grey; WH = White
Ordering example	AXGB122-15W-30K-BK

Dark Sky

Wet Location

UL

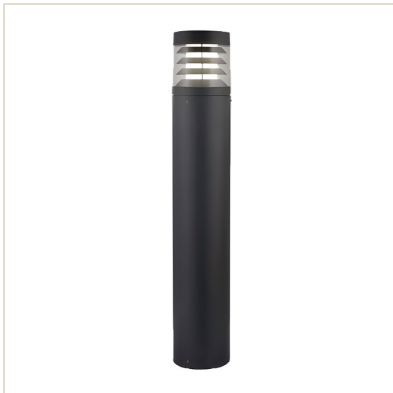

LED Garden Bollard

Auto dealerships, multi-family parking lots, assisted living, educational and business campuses, parks & recreation facilities, security areas, malls, and retail stores.

Model	Description
AXGB130	Wattage: 15W / 25W; Kelvin/CCT: 30K / 40K; Dimensions: 39.5"H x 6.75"W; Special Functions: EM = Emergency Back-up (overview table)

UL or ETL Listing	Wet Locations IP65
Housing	Die cast aluminum, powder coated
Lens/Diffuser	Polycarbonate
Energy Star	Qualified
Lighting Facts	Listed
Voltage	100v/277v
Kelvin	30K, 40K
Mounting	Flush Mount. (3) 4" anchor bolts included.

Dimensions	39.5"H x 6.75"W
Wattage	15W; 25W
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin
Finish	BK = Black (standard); BZ = Bronze; GRY = Grey; WH = White
Options	EM = Emergency Back-up
Ordering example	AXGB130-25W-30K-BK

Dark Sky

Wet Location

UL



LED Garden Bollard

Auto dealerships, multi-family parking lots, assisted living, educational and business campuses, parks & recreation facilities, security areas, malls, and retail stores.

Model	Description
AXGB140	Wattage: 30W; Kelvin/CCT: 30K / 40K; Dimensions: 47.125"H x 7"W (overview table)

UL or ETL Listing	Wet Locations IP65
Housing	Die cast aluminum, powder coated
Lens/Diffuser	UV stabilized optical grade polymer
DLC	4.1 Listed. DLC Premium
Voltage	100v/277v
Kelvin	30K, 40K
CRI	Ra-70

Dimensions	47.125"H x 7"W
Wattage	30W
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin
Finish	BK = Black (standard); BZ = Bronze; GRY = Grey; WH = White
Ordering example	AXGB140-30W-30K-BK

Dark Sky

Wet Location

UL



LED Garden Bollard

Auto dealerships, multi-family parking lots, assisted living, educational and business campuses, parks & recreation facilities, security areas, malls, and retail stores.

Model	Description
AXGB150	Wattage: 30W; Kelvin/CCT: 30K / 40K / 50K; Dimensions: 47.125"H x 7"W (overview table)

UL or ETL Listing	Wet Locations IP65
Housing	Die cast aluminum, powder coated
Lens/Diffuser	Polycarbonate
Energy Star	Qualified
Lighting Facts	Listed
Voltage	100v/277v
Kelvin	30K, 40K

Dimensions	47.125"H x 7"W
Wattage	30W
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	BK = Black (standard); BZ = Bronze; GRY = Grey; WH = White
Ordering example	AXGB150-30W-30K-BK

Dark Sky

Wet Location

UL



LED Garden Bollard

Auto dealerships, multi-family parking lots, assisted living, educational and business campuses, parks & recreation facilities, security areas, malls, and retail stores.

Model	Description
AXGB160	Wattage: MW = Multi-Watt (12W/16W/22W); Kelvin/CCT: CCT Selectable (30K, 40K, 50K); Dimensions: 41.875"H x 6.125"W (overview table)

UL or ETL Listing	Wet Location
Housing	Corrosion Resistant Aluminum
Lens/Diffuser	Clear Polycarbonate
Voltage	120V-277V
Wattage	Wattage Selectable (12W,16W,22W)
Kelvin	CCT Selectable (30K, 40K, 50K)
CRI	>80

Dimensions	41.875"H x 6.125"W
Wattage	MW = Multi-Watt (12W/16W/22W)
Kelvin/CCT	CCT = CCT Selectable (30K, 40K, 50K)
Finish	BK = Black (standard); BZ = Bronze; GRY = Grey; WH = White
Ordering example	AXGB160-MW-CCT-BK

Dark Sky Wet Location UL



LED Garden Bollard

Auto dealerships, multi-family parking lots, assisted living, educational and business campuses, parks & recreation facilities, security areas, malls, and retail stores.

Model	Description
AXGB170	Wattage: MW = Multi-Watt (12W/16W/22W); Kelvin/CCT: CCT Selectable (30K, 40K, 50K); Dimensions: 41.875"H x 6.125"W (overview table)

UL or ETL Listing	Wet Location
Housing	Corrosion Resistant Aluminum
Lens/Diffuser	Clear Polycarbonate
Voltage	120V-277V
Wattage	Wattage Selectable (12W,16W,22W)
Kelvin	CCT Selectable (30K, 40K, 50K)
CRI	>80

Dimensions	41.875"H x 6.125"W
Wattage	MW = Multi-Watt (12W/16W/22W)
Kelvin/CCT	CCT = CCT Selectable (30K, 40K, 50K)
Finish	BK = Black (standard); BZ = Bronze; GRY = Grey; WH = White
Ordering example	AXGB170-MW-CCT-BK


Dark Sky Wet Location UL

LED LIGHTING

Pole Wind Ratings and Light Distribution Patterns


Pole Wind Ratings: POLES should be selected to suit the application. It is also important to select the pole according to the structural requirement. Effective Projected Area (EPA) ratings are listed against each pole and cover the full range of fixtures with various mounting options. Effective Projected Area (EPA) is the exposed surface area of both the fixture and the bracket with some variation depending on the shape of

the surface. POLE selection should also take into account the wind regions shown on the wind map. Base your Effective Projected Area (EPA) rating of the pole on the wind rating in that area. It is also important to account for the total weight of the fixtures to be mounted on the pole. A maximum fixture weight is listed on the pole section tables. Please add the total weight of all fixtures when selecting your pole. Follow these easy steps when selecting your pole and fixture: 1. Select a fixture and desired pole height. 2. Determine EPA rating for the selected fixture and mounting method. 3. Find the geographic wind zone for the job site. 4. Ensure that the pole's EPA rating is equal to or greater than the EPA rating for your desired fixture and mount by comparing the fixture/mount EPA rating to the selected pole's rating.




Type I Light Distribution

The Type I distribution is ideal for narrow walkways or bike paths. It is intended to be located at or near the center of the pathway, approximately two mounting heights in width.




Type II Light Distribution

The Type II distribution is ideal for wider walkways, entrance roadways, bike paths, and other long and narrow lighting applications. Intended to be located near the side of a roadway approximately 1.75 mounting heights in width.




Type III Light Distribution

The Type III distribution is ideal for roadway, general parking, and other area lighting applications. Intended to be located near the side of the area, approximately 2.75 mounting heights in width.



Type IV Light Distribution


The Type IV distribution is especially suited for wall mounting applications and for illuminating the perimeter of parking areas. Intended to be located near the side of the area, which is over 2.75 mounting heights in width. It produces a semicircular distribution with essentially the same candlepower at lateral angles from 270° to 0° to 90°.



Type 5 Light Distribution

The Type 5 distribution is ideal for general parking and area lighting applications. Intended to be located at or near the center of an intersection or in a large area since it has no beams, but produces a circular distribution with essentially the same candlepower at all lateral angles.

Shoebox Area Lights

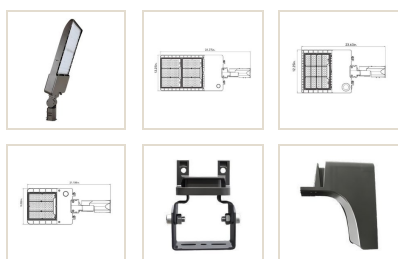

LED Shoebox Replacement

- Auto dealerships, multi-family parking lots, assisted living, educations, business campuses, parks & recreation facilities, security areas, malls, and retail stores.
- Light Distribution: Type 3 - The Type 3 distribution is ideal for roadway, general parking, and other area lighting applications. Intended to be located near the side of the area, approximately 2.75 mounting heights in width.
- Type 5 - The Type 5 distribution is ideal for general parking and area lighting applications. Intended to be located at or near the center of an intersection or in a large area since it has no beams, but produces a circular distribution with essentially the same candlepower at all lateral angles.
- Drawings shown with slipfitter mount (LEDAL-250W, LEDAL-300W: 12.25in. x 31.77in.
- LEDAL-150W: 12.25in. x 23.63in.
- LEDAL-40W, LEDAL-70W, LEDAL-100W: 9.252in. x 21.108in.)
- TM Trunnion Mount
- PM Round or Square Pole Mount
- WM Wall Mount
- SF Slipfitter
- AT300 = Twistlock Electronic Photocell (120/208/240/277VAC) NEMA 3-pin
- MS = Motion Sensor Line Voltage - 100-277VAC High/Low/Off Integrated outdoor occupancy daylight sensor

Model	Description
AXLEDAL	Prefix; Wattage: 100W, 150W, 300W (ordering); photometric table lists 40W, 70W, 100W, 150W, 250W, 300W in Type 3 and Type 5

Model data

Light Distribution Type	Watt	Kelvin	Lumens	CRI	Bug Rating
Type 3	40W	40K	5,400lm	70	B1-U0-G1
Type 3	40W	50K	5,500lm	70	B1-U0-G1
Type 3	70W	40K	9,500lm	70	B2-U0-G2
Type 3	70W	50K	9,600lm	70	B2-U0-G2
Type 3	100W	40K	12,000lm	70	B2-U0-G2
Type 3	100W	50K	11,100lm	70	B2-U0-G2
Type 3	150W	40K	18,000lm	70	B2-U0-G3
Type 3	150W	50K	17,300lm	70	B2-U0-G3
Type 3	250W	40K	34,000lm	70	B4-U0-G4
Type 3	250W	50K	34,500lm	70	B4-U0-G4
Type 3	300W	40K	36,000lm	70	B4-U0-G4
Type 3	300W	50K	33,600lm	70	B4-U0-G4
Type 5	40W	40K	5,400lm	70	B1-U0-G1
Type 5	40W	50K	5,500lm	70	B1-U0-G1
Type 5	70W	40K	9,500lm	70	B2-U0-G2
Type 5	70W	50K	9,600lm	70	B2-U0-G2
Type 5	100W	40K	12,000lm	70	B2-U0-G1
Type 5	100W	50K	11,100lm	70	B2-U0-G1
Type 5	150W	40K	18,000lm	70	B2-U0-G1
Type 5	150W	50K	17,300lm	70	B2-U0-G1

Light Distribution Type	Watt	Kelvin	Lumens	CRI	Bug Rating
Type 5	250W	40K	34,000lm	70	B4-U0-G4
Type 5	250W	50K	34,500lm	70	B4-U0-G4
Type 5	300W	40K	36,000lm	70	B2-U0-G2
Type 5	300W	50K	33,600lm	70	B2-U0-G2

UL or ETL Listing	Wet Locations IP65. UL approved UL1598
Housing	Die cast aluminum
Lens/Diffuser	UV stabilized optical grade polymer
DLC	4.1 Listed. DLC Premium
Voltage	100v/277v
Kelvin	30K, 40K
CRI	Ra-70
Dimensions	40W/70W/100W - 9.252"W x 2.5"H x 21.108"L; 150W - 12.25"W x 2.5"H x 23.63"L; 250W/300W - 12.25"W x 2.5"H x 31.77"L
Wattage	100W; 150W; 300W

Wet Location

UL

Kelvin/CCT	40K = 4000°Kelvin; 50K = 5000°Kelvin
Voltage	U = 120-277V; H = 347-480V
Optic	T3 = Type 3; T5 = Type 5
Finish	BK = Black; BZ = Bronze; WH = White
Mounting	PM = Pole Mount; SF = Slipfitter; TM = Trunnion Mount; WM = Wall Mount
Options	AT300 = Photocontrol (120-277v); MS = Motion Sensor (120-277v); HS = House Shield
Ordering example	AXLEDAL-150W-U-T3-40K-PM-BK-MS

Designer Post Tops



LED Designer Post Top

- Classic design, the product is simple, modern, and elegant. This elegant design will fit the aesthetic of both modern and traditional buildings. Ideal for single and multi-family communities and commercial installations, motels, and hotels. Perfect for landscape, entrances, perimeter, and pool applications.
- Light Distribution: Type 5 - The Type 5 distribution is ideal for general parking and area lighting applications. Intended to be located at or near the center of an intersection or in a large area since it has no beams, but produces a circular distribution with essentially the same candlepower at all lateral angles.

Model data

Part	Wattage	Base	Lumens	CRI	Energy Savings
AXPT4118-35W	35W	E26	3,960lm	80	≈150w PSMH
AXPT4118-45W	45W	E26	4,950lm	80	≈175w PSMH
AXPT4118-54W	54W	E26	5,940lm	80	≈250w PSMH

Canopy	Aluminum
Support Staffs	Fiberglass reinforced plastics. Excellent mechanical strength.
Reflector	High Grade Aluminum
UL Listing	Wet Location IP65
Socket	1x E26 Medium Base
Lamp	LED Corn (sold separately)
Mounting	Fits 3" OD pole
Dimensions	29"H x 25"W

Suggested lamps	CORN-360 • 35W - 50K / CORN-360 • 45W - 50K / CORN-360 • 54W - 50K
Ordering prefix	AXPT4118
Wattage	35W; 45W; 54W
Voltage	U = 120-277V
Kelvin/CCT	50K = 5000°Kelvin
Finish	DG = Dark Grey
Ordering example	AXPT4118-35W-U-50K-DG

Dark Sky

Wet Location

UL



LED Designer Post Top

Classic design, the product is simple, modern, and elegant. This elegant design will fit the aesthetic of both modern and traditional buildings. Ideal for single and multi-family communities and commercial installations, motels, and hotels. Perfect for landscape, entrances, perimeter, and pool applications.

Model	Description
AXPT4130	Ordering prefix
AXPT4130-35W	Wattage 35W; Base E26; Lumens 3,960lm; CRI 80; Energy Savings =150w PSMH
AXPT4130-45W	Wattage 45W; Base E26; Lumens 4,950lm; CRI 80; Energy Savings =175w PSMH
AXPT4130-54W	Wattage 54W; Base E26; Lumens 5,940lm; CRI 80; Energy Savings =250w PSMH

Canopy	Aluminum
Support Staffs	Fiberglass reinforced plastics. Excellent mechanical strength.
Reflector	High Grade Aluminum
UL Listing	Wet Location IP65
Socket	1x E26 Medium Base
Lamp	LED Corn (sold separately)
Mounting	Fits 3" OD pole
Dimensions	29"H x 25"W

Light Distribution	Type 5: The Type 5 distribution is ideal for general parking and area lighting applications. Intended to be located at or near the center of an intersection or in a large area since it has no beams, but produces a circular distribution with essentially the same candlepower at all lateral angles.
Recommended Lamp	CORN-360: 35W - 50K; 45W - 50K; 54W - 50K
Wattage	35W; 45W; 54W
Voltage	U = 120-277V
Kelvin/CCT	50K = 5000°Kelvin
Finish	DG = Dark Grey
Ordering example	AXPT4130-35W-U-50K-DG

Dark Sky

Wet Location

UL



LED Designer Post Top

Classic design, the product is simple, modern, and elegant. This elegant design will fit the aesthetic of both modern and traditional buildings. Ideal for single and multi-family communities and commercial installations, motels, and hotels. Perfect for landscape, entrances, perimeter, and pool applications.

Model	Description
AXPT4870	Wattage 35W; Lumens 3,960lm; CRI 80; Energy Savings =150w PSMH
AXPT4872	Wattage 45W; Lumens 4,950lm; CRI 80; Energy Savings =175w PSMH
AXPT4874	Wattage 54W; Lumens 5,940lm; CRI 80; Energy Savings =250w PSMH



Body	Die cast aluminum
Optical	Anodized PP Plastic Reflector
Lens	Tempered Glass
Gear Plate	Galvanized steel plate
Light Source	Integrated LED
Mounting	Fits 3" OD pole
UL Listing	Wet Location IP66
Finish	Surface anti-aging electrostatic spray. Super resistant to corrosion.
Dimensions	20.5"H x 18.75"W


Light Distribution	Type 5: The Type 5 distribution is ideal for general parking and area lighting applications. Intended to be located at or near the center of an intersection or in a large area since it has no beams, but produces a circular distribution with essentially the same candlepower at all lateral angles.
--------------------	--

Wattage	35W; 45W; 54W
Voltage	U = 120-277V
Kelvin/CCT	50K = 5000°Kelvin
Finish	BK = Black
Ordering example	AXPT4870-35W-U-50K-BK

Dark Sky

Wet Location

UL



LED Designer Post Top

Classic design, the product is simple, modern, and elegant. This elegant design will fit the aesthetic of both modern and traditional buildings. Ideal for single and multi-family communities and commercial installations, motels, and hotels. Perfect for landscape, entrances, perimeter, and pool applications.

Model	Description
AXPT4876	Wattage 40W; Lumens 4,400lm; CRI 80; Energy Savings =160w PSMH
AXPT4878	Wattage 60W; Lumens 6,600lm; CRI 80; Energy Savings =260w PSMH
AXPT4880	Wattage 80W; Lumens 8,800lm; CRI 80; Energy Savings =320w PSMH

Body	Die cast aluminum
Optical	Anodized PP Plastic Reflector
Lens	Tempered Glass
Gear Plate	Galvanized steel plate
Light Source	Integrated LED
Mounting	Fits 2 3/8" OD pole
UL Listing	Wet Location IP66
Finish	Surface anti-aging electrostatic spray. Super resistant to corrosion.
Dimensions	20.5"H x 18.75"W

Light Distribution	Type 5: The Type 5 distribution is ideal for general parking and area lighting applications. Intended to be located at or near the center of an intersection or in a large area since it has no beams, but produces a circular distribution with essentially the same candlepower at all lateral angles.
Wattage	40W; 60W; 80W
Voltage	U = 120-277V
Kelvin/CCT	50K = 5000°Kelvin
Finish	DG = Dark Grey
Ordering example	AXPT44876-40W-U-50K-DG

Dark Sky Wet Location UL



LED Designer Post Top

Classic design, the product is simple, modern, and elegant. This elegant design will fit the aesthetic of both modern and traditional buildings. Ideal for single and multi-family communities and commercial installations, motels, and hotels. Perfect for landscape, entrances, perimeter, and pool applications.

Model	Description
AXPT4882	Wattage 35W; Lumens 3,960lm; CRI 80; Energy Savings =150w PSMH
AXPT4884	Wattage 45W; Lumens 4,950lm; CRI 80; Energy Savings =175w PSMH
AXPT4886	Wattage 54W; Lumens 5,940lm; CRI 80; Energy Savings =250w PSMH

Body	Die cast aluminum
Optical	Anodized PP Plastic Reflector
Lens	Tempered Glass
Gear Plate	Galvanized steel plate
Light Source	Integrated LED
Mounting	Fits 3" OD pole
UL Listing	Wet Location IP66
Finish	Surface anti-aging electrostatic spray. Super resistant to corrosion.
Dimensions	26.85"H x 20.875"W

Light Distribution	Type 5: The Type 5 distribution is ideal for general parking and area lighting applications. Intended to be located at or near the center of an intersection or in a large area since it has no beams, but produces a circular distribution with essentially the same candlepower at all lateral angles.
---------------------------	--

Wattage	35W; 45W; 54W
Voltage	U = 120-277V
Kelvin/CCT	50K = 5000°Kelvin
Finish	BK = Black; DB = Dark Bronze
Ordering example	AXPT4882-35W-U-50K-BK

Dark Sky

Wet Location

UL



LED Designer Post Top

Classic design, the product is simple, modern, and elegant. This elegant design will fit the aesthetic of both modern and traditional buildings. Ideal for single and multi-family communities and commercial installations, motels, and hotels. Perfect for landscape, entrances, perimeter, and pool applications.

Model	Description
AXPT4890	Ordering prefix
AXPT4890-60W	Wattage 60W; Lumens 7,200lm; CRI Ra-70
AXPT4890-100W	Wattage 100W; Lumens 12,000lm; CRI Ra-70
AXPT4890-150W	Wattage 150W; Lumens 18,000lm; CRI Ra-70

Body	Die cast aluminum
Optical	Anodized PP Plastic Reflector
Lens	Tempered Glass
Gear Plate	Galvanized steel plate
Light Source	Integrated LED
Mounting	Fits 3" OD pole
UL Listing	Wet Location IP65
Finish	Surface anti-aging electrostatic spray. Super resistant to corrosion.
Dimensions	

Light Distribution	Type 5: The Type 5 distribution is ideal for general parking and area lighting applications. Intended to be located at or near the center of an intersection or in a large area since it has no beams, but produces a circular distribution with essentially the same candlepower at all lateral angles.
Wattage	60W; 100W; 150W
Voltage	U = 120-277V
Kelvin/CCT	40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	BK = Black; BZ = Bronze; GY = Grey; WH = White
Options	AT120 = Photocontrol
Ordering example	AXPT4890-60W-U-50K-BK

- Dark Sky
- Wet Location
- UL



LED Designer Post Top

Classic design, the product is simple, modern, and elegant. This elegant design will fit the aesthetic of both modern and traditional buildings. Ideal for single and multi-family communities and commercial installations, motels, and hotels. Perfect for landscape, entrances, perimeter, and pool applications.

Model	Description
AXPT5000	Wattage 30W; Lumens 3,000lm; CRI Ra-70

Body	Die cast aluminum
Optical	Anodized PP Plastic Reflector
Lens	UV stabilized & impact resistant optical grade polymer
Light Source	Integrated LED
Driver Current	150mA
Power Factor	0.95/>0.89
UL Listing	Wet Location IP65
Cold Weather Start	- 35°C to +55°C (-31°F to +131°F)
Dimensions	9"H x 7"W

Light Distribution	Type 5: The Type 5 distribution is ideal for general parking and area lighting applications. Intended to be located at or near the center of an intersection or in a large area since it has no beams, but produces a circular distribution with essentially the same candlepower at all lateral angles.
Wattage	30W
Voltage	U = 120-277V
Kelvin/CCT	40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	BK = Black; BZ = Bronze; GRY = Grey; WH = White
Ordering example	AXPT5000-30W-U-40K-BK

Dark Sky

Wet Location

UL



LED Designer Post Top


Classic design, the product is simple, modern, and elegant. This elegant design will fit the aesthetic of both modern and traditional buildings. Ideal for single and multi-family communities and commercial installations, motels, and hotels. Perfect for landscape, entrances, perimeter, and pool applications.

Model	Description
AXPT5002	Wattage 30W; Lumens 3,000lm; CRI Ra-70

Body	Die cast aluminum
Optical	Anodized PP Plastic Reflector
Lens	Tempered Glass
Gear Plate	Galvanized steel plate
Light Source	Integrated LED
Mounting	Fits 3" OD pole
UL Listing	Wet Location IP65
Cold Weather Start	- 35°C to +55°C (-31°F to +131°F)
Dimensions	7.125"H x 7"W

Light Distribution	Type 5: The Type 5 distribution is ideal for general parking and area lighting applications. Intended to be located at or near the center of an intersection or in a large area since it has no beams, but produces a circular distribution with essentially the same candlepower at all lateral angles.
Wattage	30W
Voltage	U = 120-277V
Kelvin/CCT	40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	BK = Black; BZ = Bronze; GRY = Grey; WH = White
Ordering example	AXPT5002-30W-U-50K-BK

Dark Sky Wet Location UL



LED Designer Post Top

Classic design, the product is simple, modern, and elegant. This elegant design will fit the aesthetic of both modern and traditional buildings. Ideal for single and multi-family communities and commercial installations, motels, and hotels. Perfect for landscape, entrances, perimeter, and pool applications.

Model	Description
AXPT4160	Ordering prefix
AXPT4160-24W	Wattage 24W; Lumens 2,640lm; CRI 80; Energy Savings =100w PSMH
AXPT4160-35W	Wattage 35W; Lumens 3,960lm; CRI 80; Energy Savings =150w PSMH
AXPT4160-45W	Wattage 45W; Lumens 4,950lm; CRI 80; Energy Savings =175w PSMH


Body	Spun aluminum
Globe	High efficiency clear textured refractor
Support Staff	Fiberglass reinforced plastics. Excellent mechanical strength
Light Source	E26 medium base
UL Listing	Wet Location IP65
Cold Weather Start	- 35°C to +55°C (-31°F to +131°F)
Dimensions	34"H x 22"W

Light Distribution	Type 5: The Type 5 distribution is ideal for general parking and area lighting applications. Intended to be located at or near the center of an intersection or in a large area since it has no beams, but produces a circular distribution with essentially the same candlepower at all lateral angles.
Recommended Lamp	CORN-360: 24W - 50K; 35W - 50K; 45W - 50K
Wattage	24W; 35W; 45W
Voltage	U = 120-277V
Kelvin/CCT	50K = 5000°Kelvin
Finish	BK = Black
Ordering example	AXPT4160-35W-U-40K-BK

Dark Sky

Wet Location

UL



LED Designer Post Top


Classic design, the product is simple, modern, and elegant. This elegant design will fit the aesthetic of both modern and traditional buildings. Ideal for single and multi-family communities and commercial installations, motels, and hotels. Perfect for landscape, entrances, perimeter, and pool applications.

Model	Description
AXPT4190	Ordering prefix
AXPT4190-24W	Wattage 35W; Lumens 3,960lm; CRI 80; Energy Savings =150w PSMH
AXPT4190-35W	Wattage 45W; Lumens 4,950lm; CRI 80; Energy Savings =175w PSMH
AXPT4190-45W	Wattage 54W; Lumens 5,940lm; CRI 80; Energy Savings =250w PSMH

Body	Die cast aluminum
Optical	Anodized PP Plastic Reflector
Lens	Tempered Glass
Gear Plate	Galvanized steel plate
Light Source	E26 medium base
Mounting	Fits 3" OD pole
UL Listing	Wet Location IP65
Cold Weather Start	- 35°C to +55°C (-31°F to +131°F)
Dimensions	42"H x 18"W

Light Distribution	Type 5: The Type 5 distribution is ideal for general parking and area lighting applications. Intended to be located at or near the center of an intersection or in a large area since it has no beams, but produces a circular distribution with essentially the same candlepower at all lateral angles.
Recommended Lamp	CORN-360: 35W - 50K; 45W - 50K; 54W - 50K
Wattage	30W
Voltage	U = 120-277V
Kelvin/CCT	50K = 5000°Kelvin
Finish	BK = Black
Ordering example	AXPT4190-30W-U-50K-BK

Dark Sky Wet Location UL



LED Designer Post Top

Classic design, the product is simple, modern, and elegant. This elegant design will fit the aesthetic of both modern and traditional buildings. Ideal for single and multi-family communities and commercial installations, motels, and hotels. Perfect for landscape, entrances, perimeter, and pool applications.

Model	Description
AXPT4176	Ordering prefix
AXPT4176-24W	Wattage 24W; Lumens 2,640lm; CRI 80; Energy Savings 100w PSMH
AXPT4176-35W	Wattage 35W; Lumens 3,960lm; CRI 80; Energy Savings 150w PSMH
AXPT4176-45W	Wattage 45W; Lumens 4,950lm; CRI 80; Energy Savings 175w PSMH
AXPT4176-54W	Wattage 54W; Lumens 5,940lm; CRI 80; Energy Savings 250w PSMH

Body	Spun aluminum
Globe	High efficiency clear textured refractor
Support Staff	Fiberglass reinforced plastics. Excellent mechanical strength
Light Source	E26 medium base
UL Listing	Wet Location IP65
Dimensions	44"H x 18"W
Light Distribution	Type 5: The Type 5 distribution is ideal for general parking and area lighting applications. Intended to be located at or near the center of an intersection or in a large area since it has no beams, but produces a circular distribution with essentially the same candlepower at all lateral angles.

Recommended Lamp	CORN-360: 24W - 50K; 35W - 50K; 45W - 50K; 54W - 50K
Wattage	24W; 35W; 45W; 54W
Voltage	U = 120-277V
Kelvin/CCT	50K = 5000°Kelvin
Finish	BK = Black
Ordering example	AXPT4176-35W-U-40K-BK

Dark Sky

Wet Location

UL



LED Designer Post Top

Classic design, the product is simple, modern, and elegant. This elegant design will fit the aesthetic of both modern and traditional buildings. Ideal for single and multi-family communities and commercial installations, motels, and hotels. Perfect for landscape, entrances, perimeter, and pool applications.

Model	Description
AXPT800206-35W	Photo caption: LED800206-35
AXPT800208-45W	Photo caption: LED800208-45
AXPT800216-35W	Photo caption: LED800216-35
AXPT800218-45W	Photo caption: LED800218-45

Wattage Table	Wattage 35W Lumens 3,960lm CRI 80 Energy Savings 150w PSMH; Wattage 45W Lumens 4,950lm CRI 80 Energy Savings 175w PSMH
Body	Spun aluminum
Globe	High efficiency clear textured refractor
Support Staff	Fiberglass reinforced plastics. Excellent mechanical strength
Light Source	E26 medium base
UL Listing	Wet Location IP65
Dimensions	36"H x 16.5"W

Light Distribution	Type 5: The Type 5 distribution is ideal for general parking and area lighting applications. Intended to be located at or near the center of an intersection or in a large area since it has no beams, but produces a circular distribution with essentially the same candlepower at all lateral angles.
Recommended Lamp	CORN-360: 35W - 50K; 45W - 50K
Voltage	U = 120-277V
Kelvin/CCT	50K = 5000°Kelvin
Finish	BK = Black; DG = Dark Grey; LG = Light Grey
Ordering example	AXPT800206-36W-U-50K-BK

- Dark Sky
- Wet Location
- UL

Poles



Direct Burial Poles

Auto dealerships, multi-family parking lots, assisted living, education, business campuses, parks & recreation areas

Model	Description
AXPOLES500	Direct Burial Poles

Body	Fabricated from the highest grade structural steel.	Burial Depth / Post Length	8' post = 18" burial; 10' post = 24" burial; 12' post = 24" burial; 15' post = 30" burial
Photocell	Optional, sold separately, easy field install	Wire Way	Wire way access window
Paint	Polyester powder coat finish	Height	15 = 15 feet
Thickness	3" x .05 Round tube	Finish	BK = Black (standard); BZ = Bronze
Mounting	Direct burial installation	Ordering example	AXPOLES500-15-BK

Wet Location



Decorative Poles

Auto dealerships, multi-family parking lots, assisted living, education, business campuses, parks & recreation areas

Model	Description
AXPOLES300	Decorative Poles

Body	Tapered high-tensile carbon steel shaft from 3.5" round welded to a steel anchor plate. After tapering, forming, and welding, the entire shaft assembly is hot dipped galvanized.	Base Cover	Made of one piece of fiberglass reinforced plastics, mechanically assembled together with stainless screws. There is one door in the base cover to open the maintenance hatch.
Access Plate	A 3.5" x 7" maintenance opening with cover and ground connector is centered 13" from the bottom of the anchor plate.	Finish	"Hot-Dipped" chemical etching preparation. Polyester powder coat texture finish. Standard stock color is black.
		Height	10 = 10 feet; 12 = 12 feet
		Finish	BK = Black (standard); BZ = Bronze
		Ordering example	AXPOLES300-12-BK

Wet Location



Festoon Poles

Ideal for patios, overhangs, outdoor living areas, tents for weddings or festivals, and event lighting.


Model	Description
AXPOLES400	Festoon Poles

Shaft Diameter	4"
Shaft Construction	Structural Steel
Shaft Yield Strength	Meets minimum of 46,000 PSI
Shaft Wind Rating	90 MPH
Shaft Wall Thickness	7Ga, 11Ga
Shaft Wiring	Reinforced hand hole w/ cover. Ground lug located inside pole opposite hand hole.
Shaft Finish	Polyester powder coat, pretreated by sand blast. Top coat baked a 400 degrees for maximum hardness and durability.
Base Construction	Hot Rolled Steel
Base Yield Strength	Meets minimum of 46,000 PSI
Base Application	Base telescopes & is circumferentially welded to pole shaft

Base Installation	Slotted bolt holes provide 1" flexibility on either side of bolt circle centerline.
Base Wiring	Reinforced hand hole w/ cover. Ground lug located inside pole opposite hand hole.
Base Anchorage	4 anchor bolts (hot rolled steel) minimum yield strength of 50,000 PSI "L" bend on the end are threaded on the other end. Galvanized and come with 2 nuts and washers.
Base Finish	Polyester powder coat, pretreated by sand blast. Top coat baked a 400 degrees for maximum hardness and durability.
Height	10 = 10 feet; 12 = 12 feet
Finish	BK = Black (standard); BZ = Bronze
Ordering example	AXPOLES400-12-BK

Wet Location

String Lights



Commercial Grade LED String Lights

- Ideal for patios, overhangs, outdoor living areas, tents for weddings or festivals, and event lighting. Hanging Instructions: Light sockets must be suspended so that bulbs are facing down only. DO NOT MOUNT THE LIGHT STRINGS WITH SOCKETS FACING UPWARD!
- Light string must be securely attached to a support structure at each end of each span. The maximum unsupported span distance for 48 foot Cord & Plug Light String is 20 feet (10 sockets).
- Secure light string to supporting hardware (eye bolts, brackets, etc - not included) using cable ties (not included).
- Ensure any cut ends are properly sealed to prevent entrance of water
- For spans exceeding 20 feet, use properly rated cable support system and cable ties (neither are provided with light string) and follow local codes for suspended cables and loads.
- See accessories on the following page.

Model	Description
AXSTL830	Commercial Grade LED String Lights

ETL Listing	Indoor/Outdoor. Suitable for year-round use. IP64	Construction	Formulated PVC sockets form a tight seal around bulbs to preclude the entrance of water and moisture. Suspended socket has T-mold with mounting hole at top while non- suspended socket has two mounting ears built into the base.
Wire Color	Black	Mounting	For spans up to 20 feet, use eye bolts and plastic ties to anchor ends. For spans longer than 20 feet, use catenary cable (sold separately) with plastic ties at each socket.
Wire Type	2-wire with 120V plug and terminated end.	Cord & Plug Set	Lead wire (16"L); Tail wire (9"L)
Sockets	48' = 24 Sockets; 100' = 50 Sockets	Height	48 = 48 feet; 100 = 100 feet
Light Source	E26 Medium Base - S14 Bulb	Model	S = Suspended
Voltage	120V	Finish	BK = Black
Wattage	48' = 600W per string; 100' = 1,250W per string	Ordering example	AXSTL830-48-S-BK
Socket Spacing	24"		

ETL



Decorative S14 LED Bulb

AXLEDS14

Decorative S14 bulb with E26 base.
Long lasting LED.

Decorative S14 bulb with E26 base.
Long lasting LED.



End Cap

AX-M/MS-END

Black plastic end cap.

Black plastic end cap.



60ft. Catenary Cable Kit

AX-SL-CABLE-60

60ft. Catenary Cable Kit includes:
(1) 60ft. length of 1/8" diameter
catenary/guide cable for light string
installation, (2) heavy duty cable
locks, and (1) cable release key.

60ft. Catenary Cable Kit includes:
(1) 60ft. length of 1/8" diameter
catenary/guide cable for light string
installation, (2) heavy duty cable
locks, and (1) cable release key.



110ft. Catenary Cable Kit

AX-SL-CABLE-110

110ft. Catenary Cable Kit includes:
(1) 110ft. length of 1/8" diameter
catenary/guide cable for light string
installation, (2) heavy duty cable
locks, and (1) cable release key.

110ft. Catenary Cable Kit includes:
(1) 110ft. length of 1/8" diameter
catenary/guide cable for light string
installation, (2) heavy duty cable
locks, and (1) cable release key.



500ft. Catenary Cable Bulk Reel

AX-SL-CABLE-500

500ft. Catenary Cable Bulk Reel
includes: (1) 500ft. length of 1/8"
diameter catenary/guide cable for
light string installation.

500ft. Catenary Cable Bulk Reel
includes: (1) 500ft. length of 1/8"
diameter catenary/guide cable for
light string installation.



Cable Locks (4)

AX-SL-LOCK-4

(4) Heavy duty cable locks for 1/8"
catenary cable, includes cable
release key. Supports loads up to
330lbs.

(4) Heavy duty cable locks for 1/8"
catenary cable, includes cable
release key. Supports loads up to
330lbs.



Tensioning Tool

AX-SL-TT

Tensioning tool is used to eliminate
sag from catenary cable. Never
tighten cable before load is
attached. Never over-tighten cable.

Tensioning tool is used to eliminate
sag from catenary cable. Never
tighten cable before load is
attached. Never over-tighten cable.

LED Track Lights



Fixed Track Light, GU10 Heads

Fixed Track. Exceptional design for residential, commercial, and hospitality applications. Perfect for great rooms, entryways, dining areas, and foyers.

Model	Description
AXT4232	Ordering prefix
AXT4232-3×6W	Heads 3; Wattage 3 × 6w; Base GU10; Lumens 1,350lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 13.25" x 32.88" x 5.13"
AXT4232-4×6W	Heads 4; Wattage 4 × 6w; Base GU10; Lumens 1,800lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 13.25" x 32.88" x 5.13"

UL or ETL Listing	Dry Location
Material	Cold Rolled Steel, Baked Enamel
Lens	NA
Light Source	LED MR16 (GU10 Socket) Sold Separately
CRI	>80
Track	Fixed
Voltage	120V
Mounting	Ceiling Mount. All necessary hardware included.

Recommended Lamp	AXLED066 6W • 450lm 30K, 40K, 50K
Wattage	3×6W = 3 × 6 watt GU10 Socket Head; 4×6W = 4 × 6 watt GU10 Socket Head
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	BN = Brushed Nickel; CH = Chrome; WH = White; BK = Black
Ordering example	AXT4232-3×6W-30K-BN

UL



Fixed Track Light, GU10 Heads

Fixed Track. Exceptional design for residential, commercial, and hospitality applications. Perfect for great rooms, entryways, dining areas, and foyers.

Model	Description
AXT4228	Ordering prefix
AXT4228-3×6W	Heads 3; Wattage 3 × 6w; Base GU10; Lumens 1,350lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 13.25" x 32.88" x 5.13"
AXT4228-4×6W	Heads 4; Wattage 4 × 6w; Base GU10; Lumens 1,800lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 13.25" x 32.88" x 5.13"

UL or ETL Listing	Dry Location
Material	Cold Rolled Steel, Baked Enamel
Lens	NA
Light Source	LED MR16 (GU10 Socket) Sold Separately
CRI	>80
Track	Fixed
Voltage	120V
Mounting	Ceiling Mount. All necessary hardware included.

Recommended Lamp	AXLED066 6W • 450lm 30K, 40K, 50K
Wattage	3×6W = 3 × 6 watt GU10 Socket Head; 4×6W = 4 × 6 watt GU10 Socket Head
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	BN = Brushed Nickel; CH = Chrome; WH = White; BK = Black
Ordering example	AXT4228-3×6W-30K-BN

UL



Fixed Track Light, E26 Heads, Frosted Lens

Fixed Track. Exceptional design for residential, commercial, and hospitality applications. Perfect for great rooms, entryways, dining areas, and foyers.

Model	Description
AXT4142	Ordering prefix
AXT4142-3×9W	Heads 3; Wattage 3 × 9w; Base E26; Lumens 2,400lm; Kelvin 30K, 41K; CRI >80; Dimensions 6.25" x 35.5" x 7"
AXT4142-4×9W	Heads 4; Wattage 4 × 9w; Base E26; Lumens 3,200lm; Kelvin 30K, 41K; CRI >80; Dimensions 6.25" x 35.5" x 7"

UL or ETL Listing	Dry Location
Material	Cold Rolled Steel, Baked Enamel
Lens	Frosted
Light Source	LED A19 (E26 Socket) Sold Separately
CRI	>80
Track	Fixed
Voltage	120V
Mounting	Ceiling Mount. All necessary hardware included.

Recommended Lamp	AXLEDA110 9W • 800lm • 30K AXLEDA112 9W • 800lm • 41K
Wattage	3×6W = 3 × 9 watt E26 Socket Head; 4×6W = 4 × 9 watt E26 Socket Head
Kelvin/CCT	30K = 3000°Kelvin; 41K = 4100°Kelvin
Finish	BN = Brushed Nickel; CH = Chrome; WH = White; BK = Black
Ordering example	AXT4142-3×9W-27K-BN

UL



Fixed Track Light, Integrated LED Heads

Fixed Track. Exceptional design for residential, commercial, and hospitality applications. Perfect for great rooms, entryways, dining areas, and foyers.

Model	Description
AXT4214	Ordering prefix
AXT4214-4×12W	Heads 4; Wattage 4 × 12w; Lumens 3,680lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 5" x 26.75"

UL or ETL Listing	Dry Location
Material	Cold Rolled Steel, Baked Enamel
Lens	Opal White
Light Source	Integrated LED
CRI	>80
Track	Fixed
Voltage	120V

Mounting	Ceiling Mount. All necessary hardware included.
Wattage	4×12W = 4 × 12 watt Integrated LED Head
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	BN = Brushed Nickel; CH = Chrome; WH = White; BK = Black
Ordering example	AXT4214-3×12W-30K-BN

UL



Adjustable Track Light, GU10 Heads

Adjustable Track. Exceptional design for residential, commercial, and hospitality applications. Perfect for great rooms, entryways, dining areas, and foyers.

Model	Description
AXT4500	Ordering prefix
AXT4500-1×6W	Heads 1; Wattage 6w; Base GU10; Lumens 450lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 48" x 3.75" x 2.25"
AXT4500-3×6W	Heads 3; Wattage 18w (3 × 6w); Base GU10; Lumens 1,350lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 48" x 3.75" x 2.25"
AXT4500-4×6W	Heads 4; Wattage 24w (4 × 6w); Base GU10; Lumens 1,800lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 48" x 3.75" x 2.25"

UL or ETL Listing	Dry Location
Material	Cold Rolled Steel, Baked Enamel
Lens	NA
Light Source	LED MR16 (GU10 Socket) Sold Separately
CRI	>80
Track	Adjustable
Voltage	120V
Mounting	Ceiling Mount. All necessary hardware included.

Recommended Lamp	AXLED066 6W • 450lm 30K, 40K, 50K
Wattage	1×6W = 1× 6 watt GU10 Socket Head; 3×6W = 3× 6 watt GU10 Socket Head; 4×6W = 4× 6 watt GU10 Socket Head
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	BN = Brushed Nickel; CH = Chrome; WH = White; BK = Black
Ordering example	AXT4500-3×6W-30K-BN

UL



Adjustable Track Light, Integrated LED Heads

Adjustable Track. Exceptional design for residential, commercial, and hospitality applications. Perfect for great rooms, entryways, dining areas, and foyers.

Model	Description
AXT4224	Ordering prefix
AXT4224-1×14.5W	Heads 1; Wattage 14.5w; Lumens 935lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 3.18" x 6.06" x 5.43"
AXT4224-3×14.5W	Heads 3; Wattage 43.5w (3× 14.5w); Lumens 2,805lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 3.18" x 6.06" x 5.43"
AXT4224-4×14.5W	Heads 4; Wattage 58w (4× 14.5w); Lumens 3,740lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 3.18" x 6.06" x 5.43"

UL or ETL Listing	Dry Location
Material	Cold Rolled Steel, Baked Enamel
Lens	NA
Light Source	Integrated LED
CRI	>80
Track	Adjustable
Voltage	120V
Mounting	Ceiling Mount. All necessary hardware included.

Wattage	1×14.5W = 1× 14.5 watt Integrated LED Head; 3×14.5W = 3× 14.5 watt Integrated LED Head; 4×14.5W = 4× 14.5 watt Integrated LED Head
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	BN = Brushed Nickel; CH = Chrome; WH = White; BK = Black
Ordering example	AXT4224-3×14.5W-30K-BN

UL



Adjustable Track Light, GU10 Heads

Adjustable Track. Exceptional design for residential, commercial, and hospitality applications. Perfect for great rooms, entryways, dining areas, and foyers.

Model	Description
AXT4218	Ordering prefix
AXT4218-1×6W	Heads 1; Wattage 6w; Base GU10; Lumens 450lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 6" x 2.25" x 3"
AXT4218-3×6W	Heads 3; Wattage 18w (3 × 6w); Base GU10; Lumens 1,350lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 6" x 2.25" x 3"
AXT4218-4×6W	Heads 4; Wattage 24w (4 × 6w); Base GU10; Lumens 1,800lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 6" x 2.25" x 3"

UL or ETL Listing	Dry Location
Material	Cold Rolled Steel, Baked Enamel
Lens	NA
Light Source	LED MR16 (GU10 Socket) Sold Separately
CRI	>80
Track	Adjustable
Voltage	120V
Mounting	Ceiling Mount. All necessary hardware included.

Recommended Lamp	AXLED066 6W • 450lm 30K, 40K, 50K
Wattage	1×18W = 1× 6 watt GU10 Socket Head; 3×18W = 3× 6 watt GU10 Socket Head; 4×24W = 4× 6 watt GU10 Socket Head
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	BN = Brushed Nickel; CH = Chrome; WH = White; BK = Black
Ordering example	AXT4218-3×6W-30K-BN

UL



Adjustable Track Light, GU10 Heads

Adjustable Track. Exceptional design for residential, commercial, and hospitality applications. Perfect for great rooms, entryways, dining areas, and foyers.

Model	Description
AXT4226	Ordering prefix
AXT4226-1×6W	Heads 1; Wattage 1 × 6w; Base GU10; Lumens 450lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 6" x 2.25"
AXT4226-3×6W	Heads 3; Wattage 18w (3 × 6w); Base GU10; Lumens 1,350lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 6" x 2.25"
AXT4226-4×6W	Heads 4; Wattage 24w (4 × 6w); Base GU10; Lumens 1,800lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 6" x 2.25"

UL or ETL Listing	Dry Location
Material	Cold Rolled Steel, Baked Enamel
Lens	NA
Light Source	LED MR16 (GU10 Socket) Sold Separately
CRI	>80
Track	Adjustable
Voltage	120V
Mounting	Ceiling Mount. All necessary hardware included.

Recommended Lamp	AXLED066 6W • 450lm 30K, 40K, 50K
Wattage	1×6W = 1× 6 watt GU10 Socket Head; 3×6W = 3× 6 watt GU10 Socket Head; 4×6W = 4× 6 watt GU10 Socket Head
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	BN = Brushed Nickel; CH = Chrome; WH = White; BK = Black
Ordering example	AXT4226-3×6W-30K-BN

UL



Adjustable Track Light, GU10 Heads

Adjustable Track. Exceptional design for residential, commercial, and hospitality applications. Perfect for great rooms, entryways, dining areas, and foyers.

Model	Description
AXT4220	Ordering prefix
AXT4220-3×6W	Heads 3; Wattage 1 × 6w; Base GU10; Lumens 450lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 3.75" x 3.81" x 3.25"
AXT4220-3×6W	Heads 3; Wattage 18w (3 × 6w); Base GU10; Lumens 1,350lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 3.75" x 3.81" x 3.25"
AXT4220-4×6W	Heads 4; Wattage 24w (4 × 6w); Base GU10; Lumens 1,800lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 3.75" x 3.81" x 3.25"

UL or ETL Listing	Dry Location
Material	Cold Rolled Steel, Baked Enamel
Lens	NA
Light Source	LED MR16 (GU10 Socket) Sold Separately
CRI	>80
Track	Adjustable
Voltage	120V
Mounting	Ceiling Mount. All necessary hardware included.

Recommended Lamp	AXLED066 6W • 450lm 30K, 40K, 50K
Wattage	1×6W = 1× 6 watt GU10 Socket Head; 3×6W = 3 × 6 watt GU10 Socket Head; 4×6W = 4 × 6 watt GU10 Socket Head
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	BN = Brushed Nickel; CH = Chrome; WH = White; BK = Black
Ordering example	AXT4220-3×6W-30K-BN

UL



Adjustable Track Light, PAR30 Heads


Adjustable Track. Exceptional design for residential, commercial, and hospitality applications. Perfect for great rooms, entryways, dining areas, and foyers.

Model	Description
AXT4050	Ordering prefix
AXT4050-1×11.5W	Heads 1; Wattage 1 × 11.5w; Lumens 850lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 7.25" x 4"
AXT4050-3×11.5W	Heads 3; Wattage 34.5w (3 × 11.5w); Lumens 2,550lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 7.25" x 4"
AXT4050-4×11.5W	Heads 4; Wattage 46w (4 × 11.5w); Lumens 3,400lm; Kelvin 30K, 40K, 50K; CRI >80; Dimensions 7.25" x 4"

UL or ETL Listing	Dry Location
Material	Cold Rolled Steel, Baked Enamel
Lens	NA
Light Source	LED PAR30 (E26 Socket) Sold Separately
CRI	>80
Track	Adjustable
Voltage	120V
Mounting	Ceiling Mount. All necessary hardware included.

Recommended Lamp	AXLED432 11.5W • 850lm 30K, 40K, 50K
Wattage	1×11.5W = 1× 11.5 watt E26 Socket Head; 3×11.5W = 3 × 11.5 watt E26 Socket Head; 4×11.5W = 4 × 11.5 watt E26 Socket Head
Kelvin/CCT	30K = 3000°Kelvin; 40K = 4000°Kelvin; 50K = 5000°Kelvin
Finish	BN = Brushed Nickel; CH = Chrome; WH = White; BK = Black
Ordering example	AXT4050-3×11.5W-30K-BN

UL



Track

AXT098

2 ft. Track; Black, White, or Brushed Nickel

AXT100

3 ft. Track; Black, White, or Brushed Nickel

AXT102

4 ft. Track; Black, White, or Brushed Nickel

Track Accessories (for Adjustable Track)

Finish: Black, White, Brushed Nickel



Live End with Canopy

AXT106

Live End with Canopy; Black, White, or Brushed Nickel

Track Accessories (for Adjustable Track)

Finish: Black, White, Brushed Nickel



Mini Straight Connector

AXT110

Mini Straight Connector; Black, White, or Brushed Nickel

Track Accessories (for Adjustable Track)

Finish: Black, White, Brushed Nickel



Floating Feed

AXT124

Floating Feed; Black, White, or Brushed Nickel

Track Accessories (for Adjustable Track)

Finish: Black, White, Brushed Nickel



Line Voltage Monopoint

AXT160

Line Voltage Monopoint; Black, White, or Brushed Nickel

Track Accessories (for Adjustable Track)

Finish: Black, White, Brushed Nickel

LED Exit and Emergency



Thermoplastic LED Exit Sign

Model	Description
AXE1001	Thermoplastic LED Exit Sign

Voltage	Dual 120/277
Charge Rate / Power	"ON" LED indicator light and push-to-test switch for mandated code compliance.
Battery	4.8v maintenance free, rechargeable NiCd battery (EM Standard)
Input Wattage	1.9W
Transfer Switch	Internal solid state. Automatically connects the internal battery to LED board and lamp heads for minimum 90min. emergency illumination.
Charger	Fully automatic, solid state, two rate charger initiates battery charging to recharge a discharged battery in 24 hrs.
Mounting	EZ-snap mounting canopy included for top or end mount. Universal knock-out pattern on backplate for wall mount.
Housing	EZ-snap chevron directional indicators. Compact, low-profile design.
Construction	Injection molded, engineering grade, 5VA flame retardant, high impact resistant thermoplastic

UL

Option SDT	Self diagnosis feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
Option 2C	Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
Option cUL	Units tested to meet requirements of CAN/USA-c22.2 No. 141- 02 standard for unit equipment.
# of Faces	2 = Universal Single/ Double Face
Letter Color	R = Red; G = Green
Housing Color	WH = White; BK = Black
Battery	Blank = Battery Back-up; AC = AC Only
Options	SDT = Self-Diagnostics (EM units only); 2C = Dual Circuit Operation (AC units only); USA = Assembled in USA; cUL = cUL Listed
Ordering example	AXE1001-2-R-WH-SDT



Thermoplastic LED Exit/Emergency Combo

Model	Description
AXE1003	Thermoplastic LED Exit/Emergency Combo

Voltage	Dual 120/277
Charge Rate / Power	"ON" LED indicator light and push-to-test switch for mandated code compliance.
Battery	9.6v maintenance free, rechargeable NiCd battery. (EM Standard)
Transfer Switch	Internal solid state. Automatically connects the internal battery to LED board and lamp heads for minimum 90min. emergency illumination.
Charger	Fully automatic, solid state, two rate charger initiates battery charging to recharge a discharged battery in 24 hrs.
Mounting	EZ-snap mounting canopy included for top or end mount. Universal knock-out pattern on backplate for wall mount.
Housing	EZ-snap chevron directional indicators. Compact, low-profile design.
Construction	Injection molded, engineering grade, 5VA flame retardant, high impact resistant thermoplastic

UL

Option SDT	Self diagnosis feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
Option HL	12-LED heads provide increased center-to-center spacing (1.5w per head).
Option NH	No lamp head attached to the unit enabling it to be used as a remote capable exit sign.
Option RC	Remote capacity of up to 3.0 watts.
# of Faces	2 = Universal Single/ Double Face
Letter Color	R = Red; G = Green
Housing Color	WH = White; BK = Black
Battery	Blank = Battery Back-up; AC = AC Only
Options	SDT = Self-Diagnostics (EM units only); RC = Remote Capacity; HL = High Lumen; NH = No Lamp Heads
Ordering example	AXE1003-2-R-WH-AC-SDT

Thermoplastic LED Emergency Unit

Model	Description
AXE3004	Thermoplastic LED Emergency Unit



Voltage	Dual 120/277 Optional multi-tap 208/220/240 voltage available.	Option SDT	Self diagnosis feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
Charge Rate / Power	"ON" LED indicator light and push-to-test switch for mandated code compliance.	Option HL	12-LED heads provide increased center-to-center spacing (1.5w per head).
Battery	6v maintenance free, rechargeable NiCd battery.	Option SPV	Tested 120/347v to meet requirements of CSA C22.2 No. 141.10 standard for emergency lighting equipment.
Transfer Switch	Internal solid state. Automatically connects the internal battery to LED board and lamp heads for minimum 90min. emergency illumination.	Option CEC	Certified to CEC under Title 20 Regulations.
Charger	Fully automatic, solid state, two rate charger initiates battery charging to recharge a discharged battery in 24 hrs.	Option CSA	Units tested to meet requirements of CAN/USA-c22.2 No. 141- 02 standard for unit equipment.
Mounting	Surface mount via easy connect backplate, which fits most standard J boxes and snaps into place making internal electrical connections. Top and side knock-outs available for conduit application. Suitable for wall mount.	Housing Color	WH = White; BK = Black
Construction	Injection molded, engineering grade, 5VA flame retardant, high impact resistant thermoplastic.	Options	SDT = Self-Diagnostics (EM units only); SPV = 208/220/240 Volt, 50/60 Hz; HL = High Lumen; CSA = 120/347V, 60Hz input; CEC = Title 20 compliant
		Ordering example	AXE3004-WH-SDT

UL


Thermoplastic LED Emergency Unit

Model	Description
AXE3005	Thermoplastic LED Emergency Unit



Voltage	Dual 120/277	Mounting	Universal knock-out pattern on backplate for wall mount. Snaps into place, making internal electrical connections. Threaded opening at the top of the enclosure for conduit mount.
Charge	LVD (Low Voltage Disconnect) prevents battery from deep discharge	Construction	Injection molded, engineering grade, 5VA flame retardant, high impact resistant thermoplastic
Battery	3.6v 1000mAh maintenance free, rechargeable NiCd battery.	Housing Color	WH = White; BK = Black
Transfer Switch	Internal solid state. Automatically connects the internal battery to LED board and lamp heads for minimum 90min. emergency illumination.	Ordering example	AXE3005-WH
Charger	Fully automatic, solid state, two rate charger initiates battery charging to recharge a discharged battery in 24 hrs.		






Thermoplastic LED Emergency Unit

Model	Description
AXE3051	Thermoplastic LED Emergency Unit

Voltage	Dual 120/277
Charge Rate / Power	"ON" LED indicator light and push-to-test switch for mandated code compliance.
Battery	3.6v long-life, maintenance free, rechargeable Ni-MH battery.
Transfer Switch	Internal solid state. Automatically connects the internal battery to LED board and lamp heads for minimum 90min. emergency illumination.

Charger	Fully automatic, solid state, two rate charger initiates battery charging to recharge a discharged battery in 24 hrs.
Mounting	Universal J-Box mounting pattern.
Housing Color	BK = Black; WH = White
Options	RC = Remote Capable
Ordering example	AXE3051-WH-RC





LED Decorative Outdoor AC/Emergency Unit

Model	Description
AXEM900	LED Decorative Outdoor AC/Emergency Unit

Voltage	Dual 120/277
Charge Rate / Power	"ON" LED indicator light and push-to-test switch for mandated code compliance.
Battery	4.8v long-life, maintenance free, rechargeable NiCd battery.
Transfer Switch	Internal solid state. Automatically connects the internal battery to LED board and lamp heads for minimum 90min. emergency illumination.
Charger	Fully automatic, solid state, two rate charger initiates battery charging to recharge a discharged battery in 24 hrs.
Mounting	Universal knock-out pattern on backplate for wall mount. Threaded opening at top of enclosure for conduit mount.

Diagnostics	Self diagnosis feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
Photocell	Included standard for use as dusk-to- dawn luminaire.
Wiring	Field selectable wiring allows for AC operation of unit to be controlled using a wall switch, photocell, or other mechanism.
Housing Color	BK = Black; DB = Bronze; NI = Nickel; WH = White
Standard Feature	SDT = Self-Diagnostics; PC = Photocell
Options	CW = Cold Weather; CEC = Title 20 compliant
Ordering example	AXEM900-DB-SDT-CW



LED LIGHTING

LED Lamps



LED Filament A19 Lamp

LED Filament Lamps

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED052	7W	27K	A19	E26	800	330°	4.02"	60W	1/12

ETL Listing	Damp Location
Energy Star	Approved
Application	Suitable for Indoor & Outdoor
CRI	80
Driver	Built in driver system
Dimmable	Smooth dimming
Light Source	LED Filament
Rating	15,000 hrs.

Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
---------------	---

Ordering example	LED102-7W-27K
------------------	---------------

ETL

UL



LED Filament A21 Lamp

LED Filament Lamps

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED054	12W	27K	A21	E26	1100	330°	5.27"	75W	1/24

ETL Listing	Damp Location	Damp Location Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
Energy Star	Approved	
Application	Suitable for Indoor & Outdoor	
CRI	80	
Driver	Built in driver system	
Dimmable	Smooth dimming	
Light Source	LED Filament	
Rating	15,000 hrs.	Ordering example LED102-7W-27K

ETL UL



LED Filament T10 Lamp

LED Filament Lamps

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED056	4W	27K	T10	E26	420	330°	5.12"	40W	1/12
ETL Listing	Damp Location					Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.		
Energy Star	Approved								
Application	Suitable for Indoor & Outdoor								
CRI	80								
Driver	Built in driver system								
Dimmable	Smooth dimming								
Light Source	LED Filament								
Rating	15,000 hrs.					Ordering example	LED102-7W-27K		

ETL UL



LED Filament ST19 Lamp

LED Filament Lamps

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED058	7W	27K	ST19	E26	800	330°	5.51"	60W	1/12

ETL Listing	Damp Location	Damp Location Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
Energy Star	Approved	
Application	Suitable for Indoor & Outdoor	
CRI	80	
Driver	Built in driver system	
Dimmable	Smooth dimming	
Light Source	LED Filament	
Rating	15,000 hrs.	Ordering example LED102-7W-27K

ETL UL



LED Filament G40 Lamp

LED Filament Lamps

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED136	7W	27K	G40	E26	800	330°	6.61"	60W	1/12

ETL Listing	Damp Location	Damp Location Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
Energy Star	Approved	
Application	Suitable for Indoor & Outdoor	
CRI	80	
Driver	Built in driver system	
Dimmable	Smooth dimming	
Light Source	LED Filament	
Rating	15,000 hrs.	Ordering example LED102-7W-27K

ETL UL



LED Filament G25 Lamp

LED Filament Lamps

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED120	4W	27K	G25	E26	420	330°	4.13"	40W	1/24

ETL Listing	Damp Location	Damp Location Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
Energy Star	Approved	
Application	Suitable for Indoor & Outdoor	
CRI	80	
Driver	Built in driver system	
Dimmable	Smooth dimming	
Light Source	LED Filament	
Rating	15,000 hrs.	Ordering example LED102-7W-27K

ETL UL



LED Filament B11 Torpedo Lamp, E26

LED Filament Lamps

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED024	3W	27K	B11 Torpedo	E26	310	330°	3.65"	50W	1/12
ETL Listing		Damp Location				Damp Location Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.			
Energy Star		Approved							
Application		Suitable for Indoor & Outdoor							
CRI		80							
Driver		Built in driver system							
Dimmable		Smooth dimming							
Light Source		LED Filament							
Rating		15,000 hrs.				Ordering example		LED102-7W-27K	

ETL UL



LED Filament B11 Torpedo Lamp, E12

LED Filament Lamps

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED020	2.5W	27K	B11 Torpedo	E12	230	330°	3.65"	40W	1/24
ETL Listing		Damp Location				Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.		
Energy Star		Approved							
Application		Suitable for Indoor & Outdoor							
CRI		80							
Driver		Built in driver system							
Dimmable		Smooth dimming							
Light Source		LED Filament							
Rating		15,000 hrs.							
Ordering example							LED102-7W-27K		

ETL UL



LED Filament B11 Flame Tip Lamp, E26

LED Filament Lamps

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED026	3W	27K	B11 Flame Tip	E26	310	330°	4.76"	50W	1/12

ETL Listing	Damp Location	Damp Location Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
Energy Star	Approved	
Application	Suitable for Indoor & Outdoor	
CRI	80	
Driver	Built in driver system	
Dimmable	Smooth dimming	
Light Source	LED Filament	
Rating	15,000 hrs.	
Ordering example		LED102-7W-27K

ETL UL



LED Filament B11 Flame Tip Lamp, E12

LED Filament Lamps

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED022	2.5W	27K	B11 Flame Tip	E12	230	330°	4.76"	40W	1/24

ETL Listing	Damp Location
Energy Star	Approved
Application	Suitable for Indoor & Outdoor
CRI	80
Driver	Built in driver system
Dimmable	Smooth dimming
Light Source	LED Filament
Rating	15,000 hrs.

Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
---------------	---

Ordering example	LED102-7W-27K
------------------	---------------

ETL

UL



LED A19 Lamp, E26 Base

Eco LED General Household Lamps.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LEDA102	5W	27K	A19	E26	450	240°	4.25"	40W	1/4
LEDA104	5W	41K	A19	E26	450	240°	4.25"	40W	1/4
LEDA110	9W	27K	A19	E26	800	240°	4.25"	60W	1/4
LEDA112	9W	41K	A19	E26	800	240°	4.25"	60W	1/4

ETL Listing	Damp Location
Type	Down Lighting
Application	Approved for totally enclosed fixtures
Use	Direct replacement for 40-60 watt incandescent bulbs, use only 7-10 watt.
Beam Angle	240°
Direction	Omni-directional with full light pattern.
Dimmable	Non-dimmable
Rating	15,000 hrs.

Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
---------------	---

Ordering example

LEDA102-5W-27K





LED A19 Lamp, GU24 Base

Eco LED General Household Lamps.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LEDA106	5W	27K	A19	GU24	450	240°	4.25"	40W	1/4
LEDA108	5W	41K	A19	GU24	450	240°	4.25"	40W	1/4
LEDA114	9W	27K	A19	GU24	800	240°	4.25"	60W	1/4
LEDA116	9W	41K	A19	GU24	800	240°	4.25"	60W	1/4

ETL Listing	Damp Location
Type	Down Lighting
Application	Approved for totally enclosed fixtures
Use	Direct replacement for 40-60 watt incandescent bulbs, use only 7-10 watt.
Beam Angle	240°
Direction	Omni-directional with full light pattern.
Dimmable	Non-dimmable
Rating	15,000 hrs.

Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
---------------	---

Ordering example	LEDA102-5W-27K
------------------	----------------





LED A15 Lamp, E26 Base

Eco LED General Household Lamps.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED210	5.5W	27K	A15	E26	600	240°	3.48"	40W	1/4
LED214	5.5W	41K	A15	E26	600	240°	3.48"	40W	1/4

ETL Listing	Damp Location
Type	Down Lighting
Application	Approved for totally enclosed fixtures
Use	Direct replacement for 40-60 watt incandescent bulbs, use only 7-10 watt.
Beam Angle	240°
Direction	Omni-directional with full light pattern.
Dimmable	Non-dimmable
Rating	15,000 hrs.

Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
---------------	---

Ordering example	LEDA102-5W-27K
------------------	----------------





LED BR20 Lamp

Eco LED BR Lamps.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED320	6.5W	27K	BR20	E26	460	110°	3.8"	45W	1/24

ETL Listing	Damp Location
Energy Star	Approved
Uses	Down lighting, display or accent application
Beam Angle	110°
Start	Instant on to full brightness
Dimmable	Smooth, uniform dimming
Light Source	LED Reflector Flood
Rating	15,000 hrs.

Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
---------------	---

Ordering example	LED330-9W-27K
------------------	---------------

ETL

UL



LED BR30 Lamp

Eco LED BR Lamps.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED330	9W	27K	BR30	E26	650	110°	5"	65W	1/24

ETL Listing	Damp Location
Energy Star	Approved
Uses	Down lighting, display or accent application
Beam Angle	110°
Start	Instant on to full brightness
Dimmable	Smooth, uniform dimming
Light Source	LED Reflector Flood
Rating	15,000 hrs.

Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
---------------	---

Ordering example	LED330-9W-27K
------------------	---------------

ETL

UL



LED BR40 Lamp

Eco LED BR Lamps.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED340	13W	27K	BR40	E26	1,050	110°	6.46"	85W	1/12

ETL Listing	Damp Location
Energy Star	Approved
Uses	Down lighting, display or accent application
Beam Angle	110°
Start	Instant on to full brightness
Dimmable	Smooth, uniform dimming
Light Source	LED Reflector Flood
Rating	15,000 hrs.

Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
---------------	---

Ordering example	LED330-9W-27K
------------------	---------------

ETL

UL



LED PAR20 Lamp

Eco LED Par Lamps.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED420	7W	27K	PAR20	E26	460	40°	3.39"	50W	1/24

ETL Listing	Damp Location
Energy Star	Approved
Uses	Down lighting, display or accent application
Beam Angle	40° Uniform Beam Focus
Start	Instant on to full brightness
Dimmable	Full dimming. Long life.
Light Source	LED Par Lamps 120v
Rating	15,000 hrs.
LED PAR38	

E26 Base	
Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.

Ordering example	LED420-7W-27K
------------------	---------------

ETL UL



LED PAR30 Short Neck Lamp

Eco LED Par Lamps.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED430-SN	11.5W	27K	PAR30 Short Neck	E26	850	40°	3.35"	50W	1/24

ETL Listing	Damp Location
Energy Star	Approved
Uses	Down lighting, display or accent application
Beam Angle	40° Uniform Beam Focus
Start	Instant on to full brightness
Dimmable	Full dimming. Long life.
Light Source	LED Par Lamps 120v
Rating	15,000 hrs.
LED PAR38	

E26 Base	
Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.

Ordering example	LED420-7W-27K
------------------	---------------

ETL UL



LED PAR30 Long Neck Lamp

Eco LED Par Lamps.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED432-LN	11.5W	27K	PAR30 Long Neck	E26	850	40°	4.61"	50W	1/12

ETL Listing	Damp Location
Energy Star	Approved
Uses	Down lighting, display or accent application
Beam Angle	40° Uniform Beam Focus
Start	Instant on to full brightness
Dimmable	Full dimming. Long life.
Light Source	LED Par Lamps 120v
Rating	15,000 hrs.
LED PAR38	

E26 Base	
Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.

Ordering example	LED420-7W-27K
------------------	---------------

ETL

UL



LED PAR38 Lamp

Eco LED Par Lamps.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED438	13W	27K	PAR38	E26	1,050	40°	4.75"	75W	1/12
LED440	17W	27K	PAR38	E26	1,300	40°	4.75"	90W	1/12

ETL Listing	Damp Location
Energy Star	Approved
Uses	Down lighting, display or accent application
Beam Angle	40° Uniform Beam Focus
Start	Instant on to full brightness
Dimmable	Full dimming. Long life.
Light Source	LED Par Lamps 120v
Rating	15,000 hrs.
LED PAR38	

E26 Base	
Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.

Ordering example	LED420-7W-27K
------------------	---------------

ETL

UL



LED G25 Globe Lamp

LED Decorative Lamps.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED064	7W	27K	G25 Globe	E26	500	110°	4.25"	50W	1/12

ETL Listing	Damp Location	Damp Location Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
Energy Star	Approved	
Uses	Down lighting, display or accent application	
Beam Angle	110°	
Start	Instant on to full brightness	
Dimmable	Smooth, uniform dimming	
Light Source	LED Reflector Flood	
Rating	15,000 hrs.	
Ordering example		LED064-7W-27K

ETL

UL



LED MR16 Lamp, GU10 Base

LED Decorative Lamps.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED066	6W	30K	MR16	GU10	450	40°	2"	50W	1/12
ETL Listing	Damp Location					Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.		
Energy Star	Approved								
Uses	Down lighting, display or accent application								
Beam Angle	110°								
Start	Instant on to full brightness								
Dimmable	Smooth, uniform dimming								
Light Source	LED Reflector Flood								
Rating	15,000 hrs.					Ordering example	LED064-7W-27K		

ETL UL



LED MR16 Lamp, GU5.3 Base

LED Decorative Lamps.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED068	6W	30K	MR16	GU5.3	400	40°	2"	50W	1/12
ETL Listing		Damp Location				Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.		
Energy Star		Approved							
Uses		Down lighting, display or accent application							
Beam Angle		110°							
Start		Instant on to full brightness							
Dimmable		Smooth, uniform dimming							
Light Source		LED Reflector Flood							
Rating		15,000 hrs.							
Ordering example							LED064-7W-27K		

ETL UL



LED B11 Flame Tip Lamp, E12 Base

LED Decorative Lamps.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED060	5W	27K	B11 Flame Tip	E12	350	40°	3.78"	40W	1/24

ETL Listing	Damp Location
Energy Star	Approved
Uses	Down lighting, display or accent application
Beam Angle	110°
Start	Instant on to full brightness
Dimmable	Smooth, uniform dimming
Light Source	LED Reflector Flood
Rating	15,000 hrs.

Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
---------------	---

Ordering example	LED064-7W-27K
------------------	---------------

ETL

UL



LED B11 Flame Tip Lamp, E26 Base

LED Decorative Lamps.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED062	5W	27K	B11 Flame Tip	E26	350	40°	3.78"	40W	1/24

ETL Listing	Damp Location
Energy Star	Approved
Uses	Down lighting, display or accent application
Beam Angle	110°
Start	Instant on to full brightness
Dimmable	Smooth, uniform dimming
Light Source	LED Reflector Flood
Rating	15,000 hrs.

Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
---------------	---

Ordering example	LED064-7W-27K
------------------	---------------

ETL

UL



LED S14 Lamp

LED Specialty Lamps.



Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LEDS14	2W	27K	S14	E26	150	330°	3.69"	25W	1/24
ETL Listing		Damp Location				Damp Location Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.			
Energy Star		Approved							
Uses		Down lighting, display or accent application							
Beam Angle		40° Uniform Beam Focus							
Start		Instant on to full brightness							
Dimmable		Full dimming. Long life.							
Light Source		LED Par Lamps 120v							
Rating		15,000 hrs.				Note		Ideal for String Lights	
						Ordering example		LED070-2W-30K	





LED G4 Miniature Lamp

LED Specialty Lamps.



Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED070	2.5W	30K	Miniature	G4	200	150°	1.5"	20W	1/24
ETL Listing		Damp Location				Damp Location Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.			
Energy Star		Approved							
Uses		Down lighting, display or accent application							
Beam Angle		40° Uniform Beam Focus							
Start		Instant on to full brightness							
Dimmable		Full dimming. Long life.							
Light Source		LED Par Lamps 120v							
Rating		15,000 hrs.				Note		Ideal for Specialty Chandeliers	
						Ordering example		LED070-2W-30K	





LED G9 Miniature Lamp

LED Specialty Lamps.



Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	MOL	Wattage Equivalent	Pkg Qty
LED072	2.5W	30K	Miniature	G9	200	150°	2"	20W	1/24
ETL Listing		Damp Location				Damp Location Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.			
Energy Star		Approved							
Uses		Down lighting, display or accent application							
Beam Angle		40° Uniform Beam Focus							
Start		Instant on to full brightness							
Dimmable		Full dimming. Long life.							
Light Source		LED Par Lamps 120v							
Rating		15,000 hrs.				Note	Ideal for Specialty Chandeliers		
						Ordering example	LED070-2W-30K		





LED PLC Lamp, E26 Base

LED Commercial Lamps.



Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	Dimensions	Wattage Equivalent
LED010	5W	28K	PLC	E26	450	130°	5.38" x 1.10"	60W
LED012	5W	41K	PLC	E26	450	130°	5.38" x 1.10"	60W

ETL Listing	Damp Location
Type	PLC
Uses	Direct replacement for 60-75 watt incandescent or CFL bulbs.
Beam Angle	130°
Direction	Omni-directional with full light pattern
Dimmable	Non-dimmable
Light Source	LED
Rating	50,000 hrs.

Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
Note	All lamp types swivel 270°
Ordering example	LED007-7W-28K





LED PLC Lamp, GU24 Base

LED Commercial Lamps.



Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	Dimensions	Wattage Equivalent
LED005	5W	28K	PLC	GU24	450	130°	5.38" x 1.10"	60W
LED006	5W	41K	PLC	GU24	450	130°	5.38" x 1.10"	60W
LED007	7W	28K	PLC	GU24	700	130°	6.40" x 1.38"	75W
LED008	7W	41K	PLC	GU24	700	130°	6.40" x 1.38"	75W

ETL Listing	Damp Location
Type	PLC
Uses	Direct replacement for 60-75 watt incandescent or CFL bulbs.
Beam Angle	130°
Direction	Omni-directional with full light pattern
Dimmable	Non-dimmable
Light Source	LED
Rating	50,000 hrs.

Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
---------------	---

Note	All lamp types swivel 270°
Ordering example	LED007-7W-28K





LED PLC Lamp, G23/GX24 Base

LED Commercial Lamps.



Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Beam Angle	Dimensions	Wattage Equivalent
LED014	5W	28K	PLC	G23/GX23 2-Pin	450	130°	5.79" x 1.10"	60W
LED016	5W	41K	PLC	G23/GX23 2-Pin	450	130°	5.79" x 1.10"	60W
LED018	5W	28K	PLC	G24/GX24 4-Pin	450	130°	5.79" x 1.10"	60W
LED019	5W	41K	PLC	G24/GX24 4-Pin	450	130°	5.79" x 1.10"	60W

ETL Listing	Damp Location	Damp Location Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
Type	PLC	
Uses	Direct replacement for 60-75 watt incandescent or CFL bulbs.	
Beam Angle	130°	
Direction	Omni-directional with full light pattern	
Dimmable	Non-dimmable	
Light Source	LED	
Rating	50,000 hrs.	Note All lamp types swivel 270° Ordering example LED007-7W-28K





LED T8 Tube

LED Fluorescent Tube Replacements.

Model data

Model	Watts	Kelvin	Bulb Shape	Base	Lumens	Dimensions	Wattage Equivalent
LEDT800	9W	30K	T8 Tube	G13	900	24" x 1.1"	17W
LEDT801	18W	30K	T8 Tube	G13	1,800	48" x 1.1"	32W
LEDT802	9W	40K	T8 Tube	G13	900	24" x 1.1"	17W
LEDT803	9W	50K	T8 Tube	G13	900	24" x 1.1"	17W
LEDT804	18W	40K	T8 Tube	G13	1,800	48" x 1.1"	32W
LEDT805	18W	50K	T8 Tube	G13	1,800	48" x 1.1"	32W

ETL Listing	Damp Location
Type	T8 - Tube
Uses	Direct replacement for fluorescent tubes
Direction	Omni-directional with full light pattern
Dimmable	Non-dimmable
Light Source	LED
Rating	50,000 hrs.

Damp Location	Damp locations are defined as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.
---------------	---

Ordering example	LED070-2W-30K
------------------	---------------





Field *and* Fixtures

Lighting | Plumbing | Project Supply

Tell us about your project

Send us the basics and we'll follow up within one business day.

CONTACT

Matt DelPrincipe
matt@fieldandfixtures.com
817-733-8490

OFFICE

Field and Fixtures LLC
479 E Quitman St, Suite 200
Emory, TX 75440

WEB

fieldandfixtures.com
Every product line with model numbers, and all six catalogs to download.